
chanhvinh.com

Specifications

Eaton C22M20S

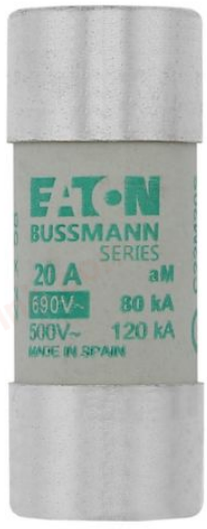

Catalog Number: C22M20S

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 690 Volts AC, 20 Amps, 80 kA Breaking capacity, class aM, with striker, compatible with a CH22 Modular fuse holder

General specifications

Product Name
Eaton Bussmann series low voltage cylindrical fuse

Catalog Number
C22M20S

EAN
5027590495769

UPC
051712666800

Product Length/Depth
58 mm

Product Height
22 mm

Product Width
22 mm

Product Weight
56.2 g

Compliances
RoHS Compliant
CE Marked

Certifications
IEC 60269

Powering Business Worldwide

chanhvinh.com

Electrical data

Amperage Rating

20 A

Voltage rating

690 V

Voltage type

AC

Breaking capacity

80 kA

Utilization category

aM (switchgear protection)

Frequency rating - max

62 Hz

Compatible fuse holder

Suitable for

CH22 Modular fuse holder

Resources

Catalogs

CA134002EN

eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf

Declarations of conformity

CE C08G, C08M, etc cylindrical fuselinks

UKCA C08G, C08M, etc cylindrical fuselinks

Technical data sheets

720115 Cylindrical fuses

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia