FIBOX
Enclosing innovations

ARCA 403015S



Sample photo

Order symbol:	ARCA 403015S	**EAN**:	6418074079695
Product nbr:	8120086	**El. number**:	
Description:	Cabinet, PC	Finland:	3423165
Remarks:	Swinghandle	Electric No. Denmark:	8212091566

Including: Cabinet base, door with PUR gasket, mounting plate, screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. F versions with flange opening (including gasket and screws). Door guide included.

Dimensions:	Length	Width	Height
mm:	400	300	150
inch:	15.7	11.8	5.9

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

Temperatures:

Temperature °C (short term):	-40 … 120 °C
Temperature °C (continuous):	-40 … 80 °C
Temperature °F (short term):	-40 … 250 °F
Temperature °F (continuous):	-40 … 175 °F

Accessories:

MPS ARCA 4030	Mounting plate (350x250x2 mm)

Accessories:


MPP ARCA 4030	Mounting plate perforated (350x250x2 mm - 26x11 mm)
MPMP ARCA 4030	Mounting plate multiperforated (350x250x2 mm - □3.6 mm)
MPX ARCA 4030	Mounting plate (350x250 mm)
DRS ARCA 403015	DIN rail frame set
IDS ARCA 4030	Inner door set
PMK ARCA 30	Pole mounting kit
RCS ARCA 4030	Rain canopy set
SBK ARCA 30	Support bar kit
SBK ARCA 40	Support bar kit
DSP ARCA VLS	Door stopper ARCA, vertical, left, small
DSP ARCA VRS	Door stopper ARCA, vertical, right, small

Rating:

Ingress Protection (EN 60529): IP66
Impact Resistance (EN 62262): IK10 +35°C /IK08 -25°C
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
UV resistance: UL 508
Flammability Rating: UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C: 960

Certificates:

SGS Fimko
Gost R

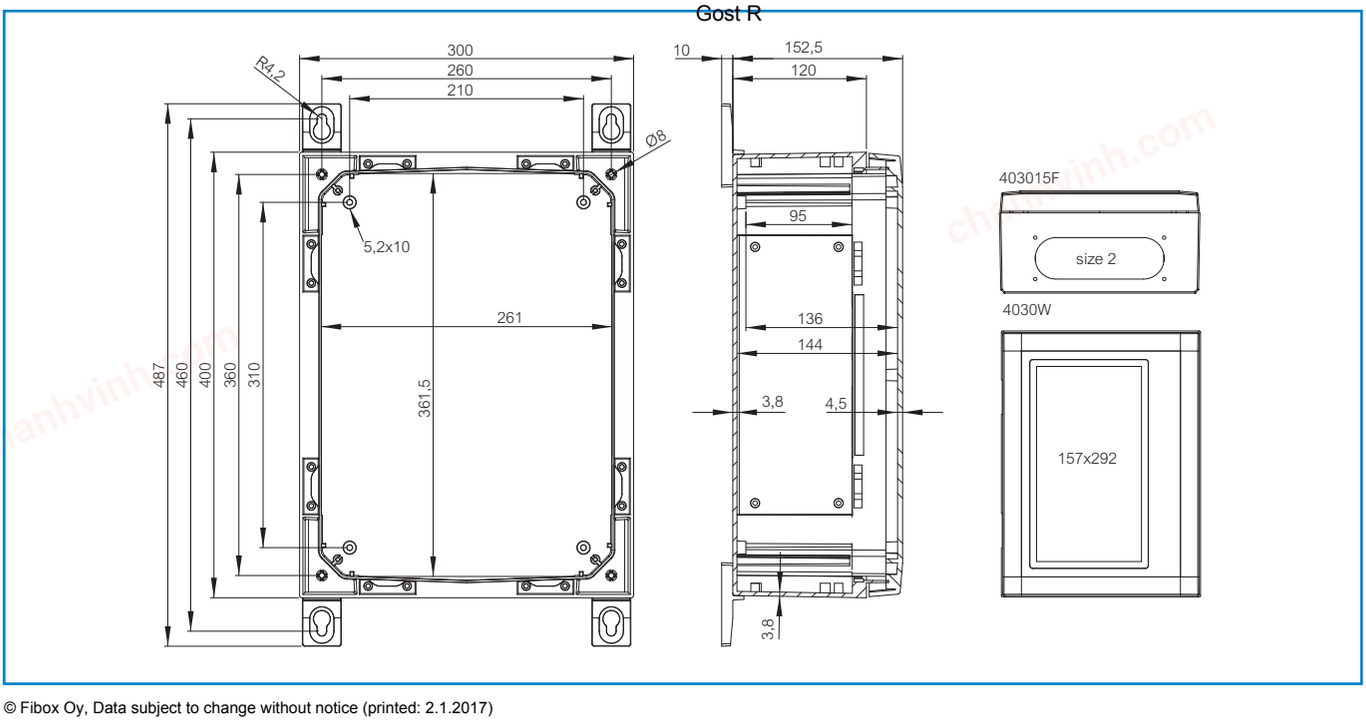

© Fibox Oy, Data subject to change without notice (printed: 2.1.2017)