chanhvinh.com

FIBOX
Enclosing innovations

MCE65 8M

Order symbol: MCE65 8M

Product nbr: 7350002

EAN: 6418074315724

Description:
Modular component enclosure IP65
including DIN rail,
insulated terminals (neutral and earth),
cover for unused modules,
plastic cap for screws



DIMENSIONS AND SPECIFICATIONS

Dimensions (HxWxD) mm:	201 x 202 x 120
No. of modules/rows:	8/1
Nominal voltage:	In 63A
Rated voltage:	AC 400V / DC 1000V
No. of terminals N/PE (6mm2):	8/8
No. of knock-outs:	
Top/bottom	1xM25/32
Side	2xM20

ACCESSORIES

	Included
Cover for unused modules – grey	YES
Insulated terminal, standard	YES
Rubber grommets	Optional
Lock for enclosure	Optional

MATERIALS


Base:	Acrylonitrile acrylic styrene
Base colour:	RAL 7035
Cover:	Polycarbonate
Cover colour:	Transparent
Glow wire test:	650°C
Teminal holder:	Self-extinguishing

RATING

Ingress Protection:	IP65
Impact Resistance:	IK08
Certification according to:	IEC 60670 / IEC 60228

TEMPERATURE

Temperature °C (continuous): -25 … +60 °C

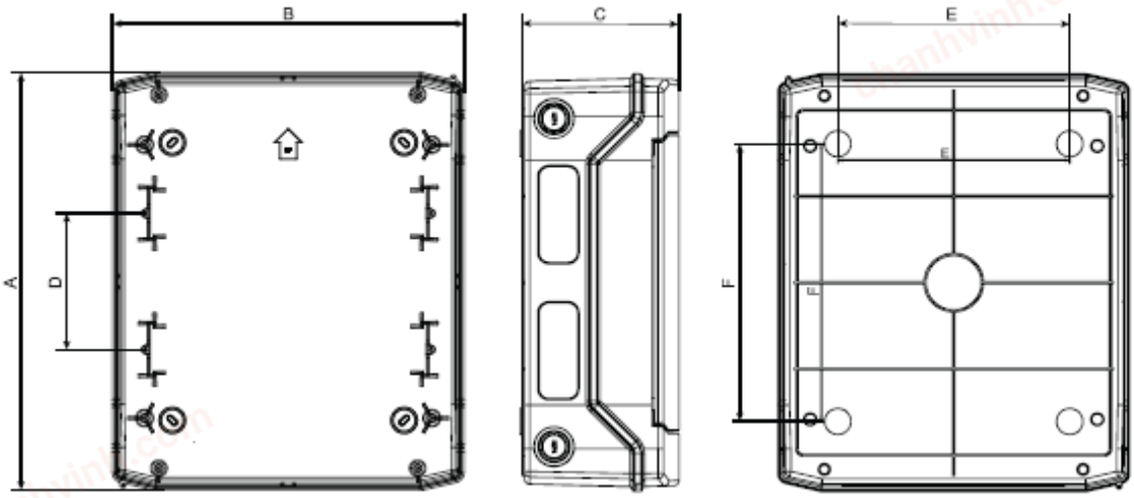

	A	B	C	D	E	F	Pde	Static load
MCE65 4M	201mm	128mm	120mm	-	-	140mm	10 W	0.65 kg
MCE65 6M	201mm	165mm	118mm	-	63mm	140mm	10 W	0.98 kg
MCE65 8M	201mm	202mm	120mm	-	100mm	140mm	13 W	1.30 kg
MCE65 12M	259mm	319mm	144mm	-	210mm	130mm	16 W	1.95 kg
MCE65 18M	259mm	428mm	144mm	-	259mm	130mm	20 W	2.93 kg
MCE65 24M	384mm	319mm	144mm	125mm	210mm	255mm	24 W	1.95 kg
MCE65 36M	535mm	319mm	144mm	125mm	210mm	380mm	26 W	1.95 kg
MCE65 48M	664mm	319mm	144mm	125mm	210mm	505mm	28 W	1.95 kg