chanhvinh.com

# PC 162412



Sample image

**Order symbol:** PC 162412

**Product nbr:** 7032830

UL Code: 7042830

UL Name: UL PC 162412

**Description:** Enclosure. PC


**Remarks:** Opaque cover

**EAN:** 6418074058478

**El. number:**

- Finland: 3435374
- Denmark: 8212002940
- Sweden: 2536130

**Including:** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

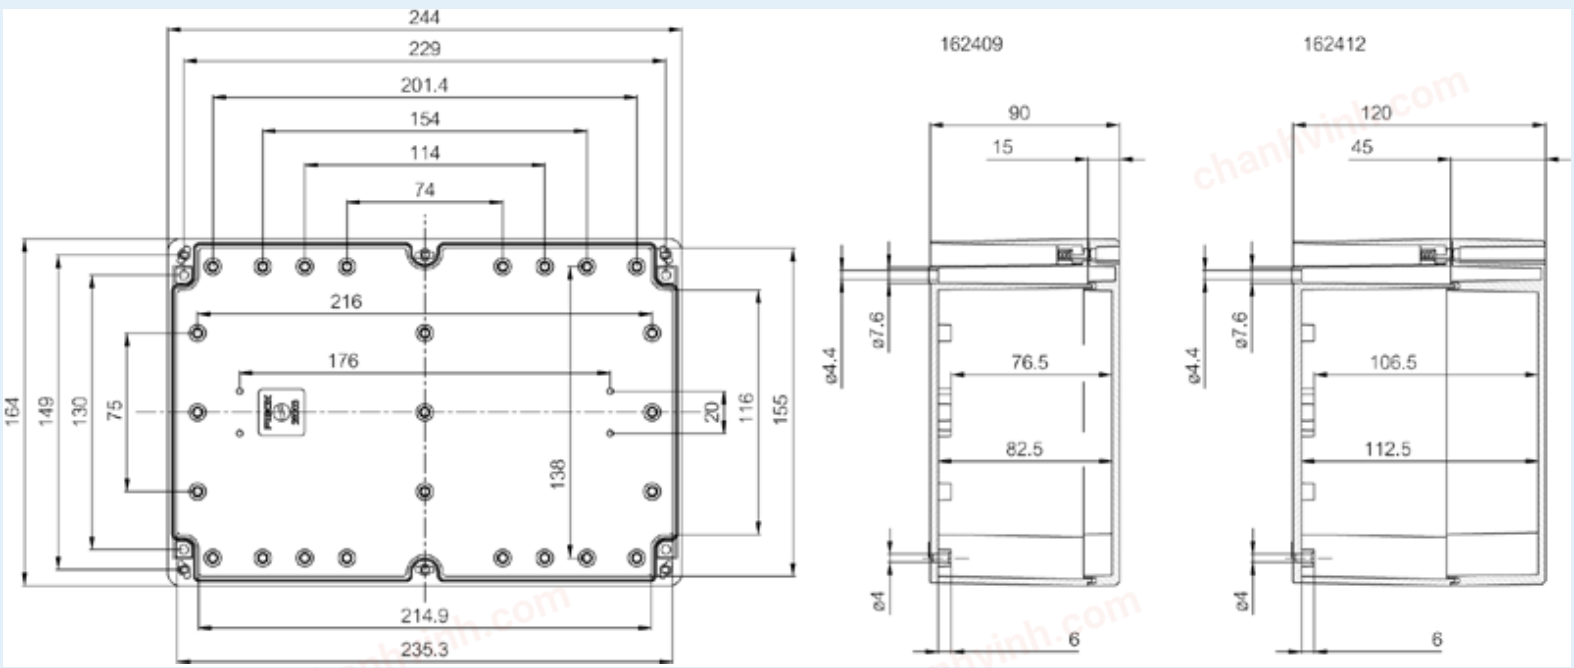


| Dimensions: | Height | Width | Depth |
|---|---|---|---|
| mm: | 164 | 244 | 120 |
| inch: | 6.46 | 9.61 | 4.72 |

**Accessories:**

| | |
|---|---|
| TRH 24 | DIN-15 Mounting rail. for enclosures: (226 x 35 x 1) |
| TF 28037 | Mounting foot kit (4 pcs). for enclosures: |
| MIN 20 | DIN-15 Mounting rail. for enclosures: (225 x 15 x 1) |

**Materials:**

| | |
|---|---|
| Material: | Polycarbonate |
| Base colour: | RAL 7035 -light grey |
| Cover colour: | RAL 7035 -light grey |
| Gasket material: | Polyurethane |

**Temperatures:**

| | |
|---|---|
| Temperature °C (short term):: | -40 … 120 |
| Temperature °C (continuous): | -40 … 80 |
| Temperature °F (short term): | -40 … 250 |
| Temperature °F (continuous): | -40 … 175 |

| | |
|---|---|
| TM 1624 | Back Panel. for enclosures: (212 x 151 x 1) |
| TH A | Gray plastic hinges (2 pcs) |

**Rating:**

| | |
|---|---|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK07; IK08; |
| Electrical insulation: | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1 |
| UV resistance: | UL 508 |
| Flammability Rating: | UL 746C 5" |
| Glow Wire Test (IEC 695-2-1) °C: | 960 °C |
| NEMA Class | |

**Certificates:**

SGSFimko_EURONORD

© Fibox Oy, Data subject to change without notice (printed: 20.05.2022)