
chanhvinh.com

finder
SWITCH TO THE FUTURE

RB
SERIES

Bistable relay 8 A

- Power Plants
- Panels for electrical distribution
- Control panels
- Automatic warehouses

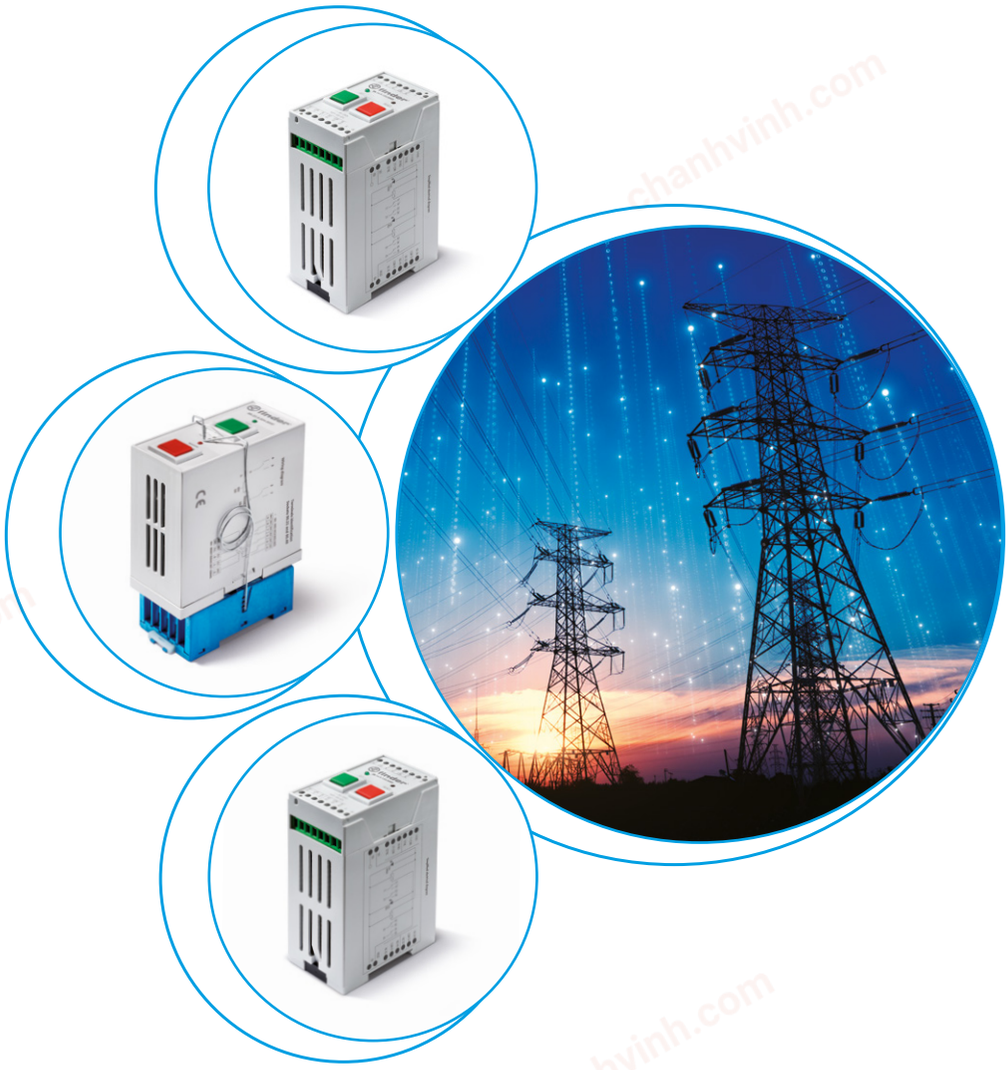

chanhvinh.com

FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property, caused as a result of the incorrect use or application of its products.



chanhvinh.com

Bistable relay for control and signaling
RB.14 35 mm rail (EN 60715) mount
RB.22 11 pin socket type 90.21 mount

- 2 or 4 pole changeover contact
- DC voltage
- 2 coil type
- SET and RESET signals
- LED command status indication
- Cadmium Free contact material

RB.14/22
Screw terminal



	RB.14	RB.22
		
		

For outline drawings see page 7

Contact specification			
Contact configuration		4 CO (4PDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	8/15	8/15
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2000	2000
Rated load AC15	VA	350	350
Single phase motor rating (230 V AC)	kW	0.37	0.37
Breaking capacity DC1: 30/110/220 V	A	8/0.3/0.12	8/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material		$AgSnO_2$	$AgSnO_2$
Coil specification			
Nominal voltage (U_N)	V DC	24 - 110…125 - 220…250	24 - 110…125 - 220…250
Rated power DC	W	7	4
Operating range	V DC	$(0.8…1.1)U_N$	$(0.8…1.1)U_N$
Technical data			
Mechanical life DC	cycles	$2 \cdot 10^6$	$2 \cdot 10^6$
Electrical life at rated load AC1	cycles	$100 \cdot 10^3$	$100 \cdot 10^3$
Operate/release time SET/RESET	ms	10/5	10/5
Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)	4 (8 mm)
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	–40…+55	–40…+55
Protection category		IP 20	IP 20
Approvals relay (according to type)		CE EAC	

VI-2020, www.findernet.com

chanhvinh.com

Ordering information

A

Example: RB series, bistable relay, 4 CO, 125 V DC coil, 35 mm rail (EN 60715) mount.

R B	.	1	4	.	9	.	1 2 5	.	0	0	0	0

Series

Type
1 = Modular version

No. of poles
4 = 4 CO

Coil version
9 = DC

Coil voltage
024 = 24 V DC
125 = 110…125 V DC
250 = 220…250 V DC

Options
0000 = Modular version 35 mm rail (EN 60715)

Codes/supply voltages
RB.14.9.024.0000
RB.14.9.125.0000
RB.14.9.250.0000

Example: RB series, bistable relay, 2 CO, 125 V DC coil, 11 pin socket type 90.21 mount.

R B	.	2	2	.	9	.	1 2 5	.	9	0	2	1

Series

Type
2 = 11 pin socket type 90.21 mount

No. of poles
2 = 2 CO

Coil version
9 = DC

Coil voltage
024 = 24 V DC
125 = 110…125 V DC
250 = 220…250 V DC

Options
9021 = Version plug-in 90.21 socket
0000 = Version relay only

Codes/supply voltages
RB.22.9.024.0000
RB.22.9.024.9021
RB.22.9.125.0000
RB.22.9.125.9021
RB.22.9.250.0000
RB.22.9.250.9021

VI-2020, www.findernet.com


chanhvinh.com

Technical data

Insulation according to EN 61810-1			
		2 CO	4 CO
Nominal voltage of supply system	V AC	230/400	230/400
Rated insulation voltage	V AC	250	250
Pollution degree		2	2
Insulation between coil and contact set			
Type of insulation		Reinforced (8 mm)	Reinforced (8 mm)
Overvoltage category		III	III
Rated impulse voltage	kV (1.2/50 µs)	4	6
Dielectric strength	V AC	2000	3000
Insulation between adjacent contacts			
Type of insulation		Basic	Basic
Overvoltage category		III	III
Rated impulse voltage	kV (1.2/50 µs)	4	4
Dielectric strength	V AC	2000	2500
Insulation between open contacts			
Type of disconnection		Micro-disconnection	Micro-disconnection
Dielectric strength	V AC/kV (1.2/50 µs)	1000/1.5	1000/1.5
Insulation between coil terminals			
Rated impulse voltage (surge) differential mode (according to EN 61000-4-5)	kV (1.2/50 µs)	2	
Other data			
Bounce time: SET (NO) / RESET (NC)	ms	3/6	
Vibration resistance (5…55)Hz: NO/NC	g	3/6	
Shock resistance	g	15	
Max cable lenght for push-button connection	m	100	
Terminals		**Screw terminal**	
		Solid and stranded cable	
Max. wire size	mm²	1 x 2.5 / 2 x 1.5	
	AWG	1 x 14 / 2 x 16	

Contact specification

RB - Maximum DC1 breaking capacity

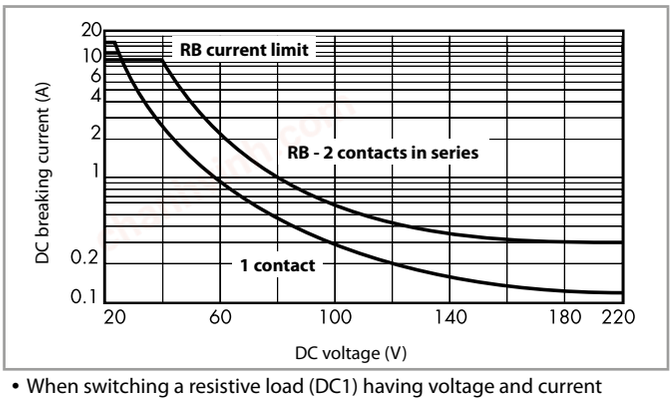

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of ≥ 100 · 10³ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
  Note: the release time for the load will be increased.

Coil specifications - Type RB.14

DC coil data

Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Rated coil consumption I at U_N	Rated power
V		V	V	mA	W
24	**9**.024	19.2	26.4	290	7
110…125	**9**.125	88	137.5	60	7
220…250	**9**.250	176	275	30	7

Coil specifications - Type RB.22

DC coil data


Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Rated coil consumption I at U_N	Rated power
V		V	V	mA	W
24	**9**.024	19.2	26.4	170	4
110…125	**9**.125	88	137.5	35	4
220…250	**9**.250	176	275	18	4

chanhvinh.com


Wiring diagrams

A


Type RB.14
Connection for only local push-buttons enable
EN = Enable - Positive voltage
0 V = Negative voltage

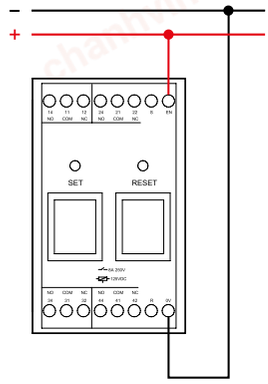


Type RB.14
Connetion for remote push-buttons enable

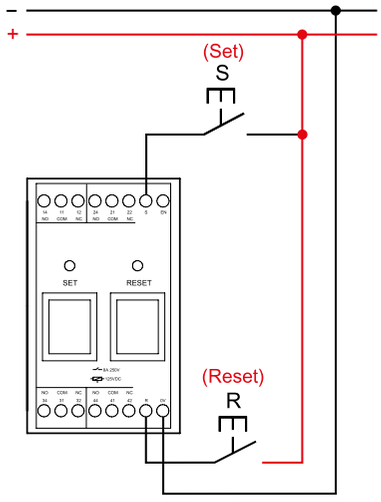


Type RB.14
Connetion for local and remote push-buttons enable

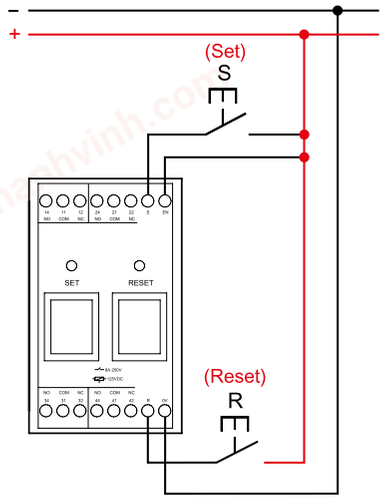


Type RB.22
Connection for only local push-buttons enable
EN = Enable - Positive voltage
0 V = Negative voltage

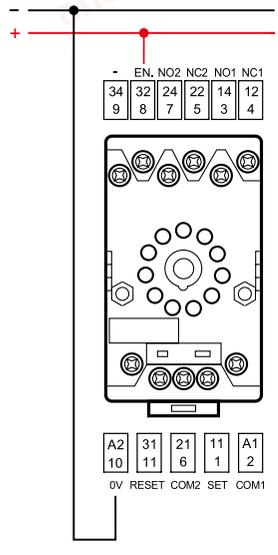


Type RB.22
Connetion for remote push-buttons enable

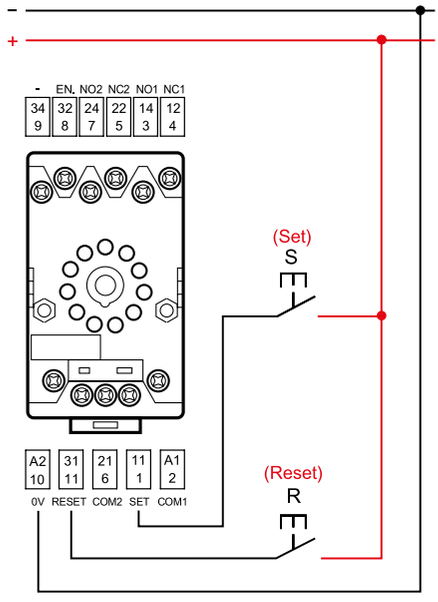

Type RB.22
Connetion for local and remote push-buttons enable

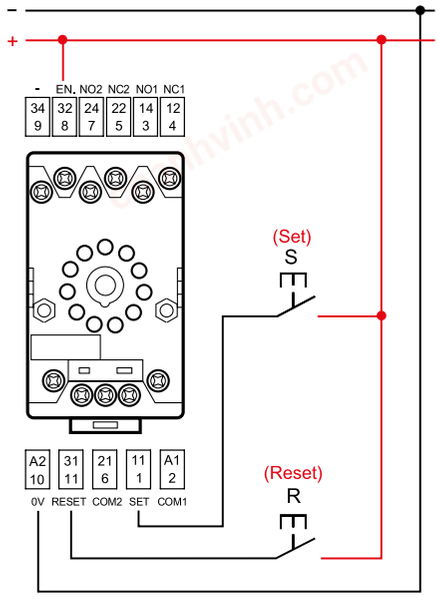

Functions

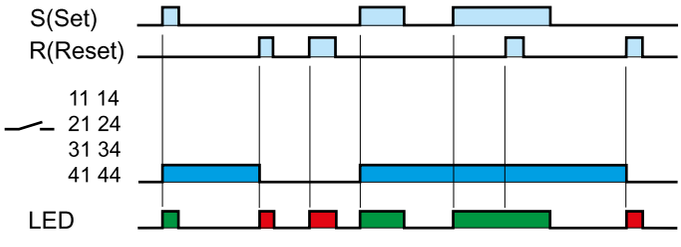


VI-2020, www.findernet.com


chanhvinh.com


Outline drawing


Type RB.14
Screw terminal



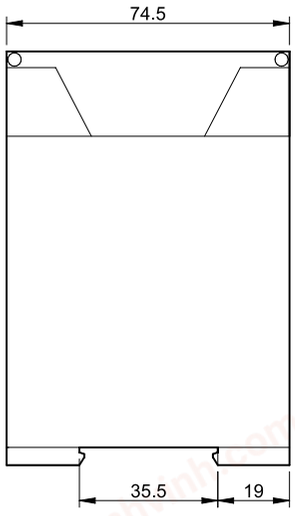

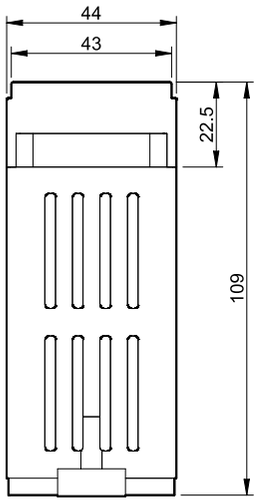


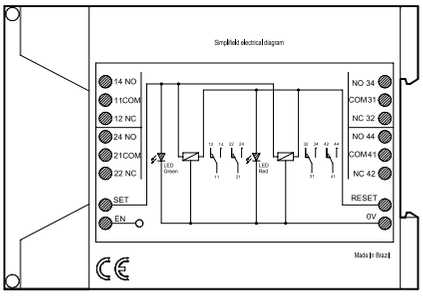






Type RB.22
Screw terminal










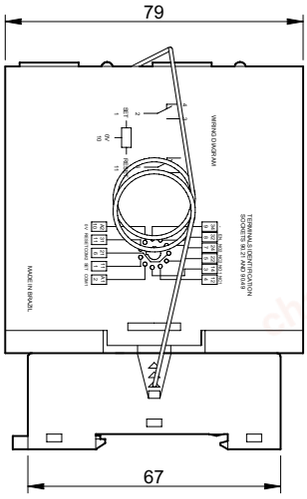

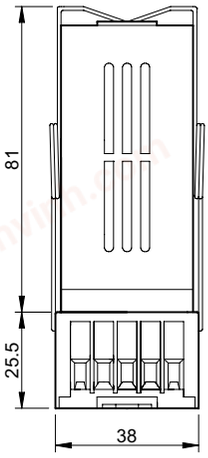







chanhvinh.com