
chanhvinh.com

fischer elektronik


Fastening for mounting rail

universal, solid plastic clip fastening for all 35 mm mounting rails; **suitable for rail material thicknesses from 1 to 2.3 mm according to DIN EN 50 022**; registrated design DE 200 07 435.0; **fast and easy mounting of heatsinks, casings etc. due to direct snap up on the mounting rail**



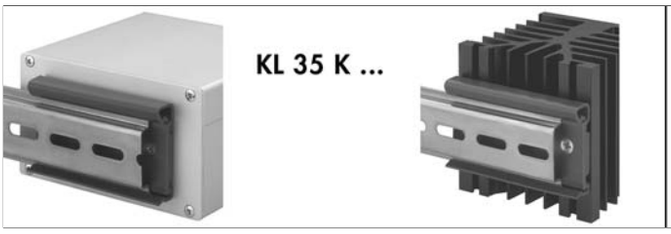

safe hold due to a stable extruded plastic profile with integrated spring back; **electroconductive material or surface on request**; special lengths and treatments on customer's request

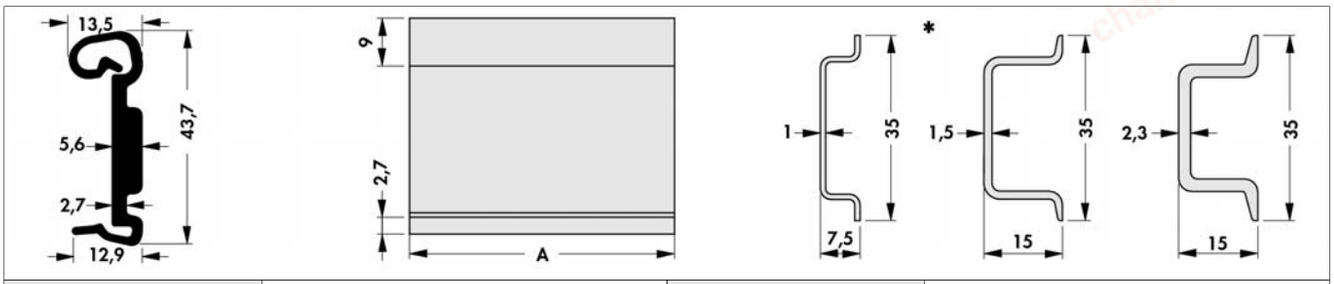


art. no.	dim. [mm] length on stock	art. no.	dim. [mm] length on stock
KL 35 K 40	40	**KL 35 K 75**	75
KL 35 K 50	50	**KL 35 K 100**	100

***** = examples of mounting rail versions suitable for KL 35 K

material	rigid PVC
heat distortion	-30 °C ... +80 °C
colour	anthracite grey
flammability	UL 94 V-0

safe hold due to a stable extuded profile with integrated stainless steel spring; **special lengths (≥** 40mm), treatments and surfaces on request

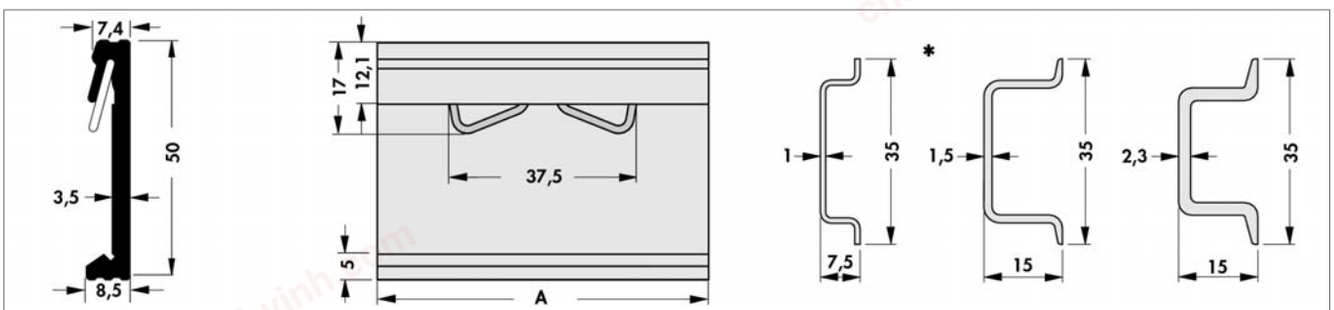

art. no.	dim. [mm] length on stock	art. no.	dim. [mm] length on stock
KL 35 50	50	**KL 35 100**	100
KL 35 75	75		

***** = examples of mounting rail versions suitable for KL 35

surface clear anodised

material	aluminium

Distance sleeves for PCB´s in HP grid → **E 31**
Extractors for guide rails → **E 22**
Insulting clamping parts → **E 38**
Miniature distance sleeves → **E 26**
Mounting pads for transistors → **E 40**
Mounting parts for heatsinks → **E 42 – 43**
Heatsink profile-overview → **A 13 - 16**
Vibration dampers → **E 34**