
chanhvinh.com


Technical Data Sheet:	***DS355-3***
Product Description	**Reducing Divider - Nylon conduit fitting**
Product Range	**FPAX - Nylon divider fitting**

FLEXICON
FLEXIBLE CONDUIT SOLUTIONS
MADE IN THE UK
Roman Way, Coleshill
Birmingham
B46 1HG, United Kingdom
Tel: 00 44 (0)1675 466900
Website: www.flexicon.uk.com
FM58347

• *FPAX - IP66, IP67, IP68 (2Bar), IP69*



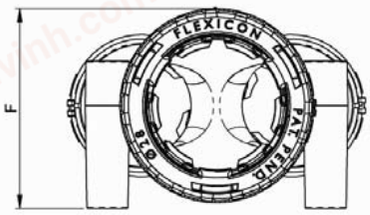

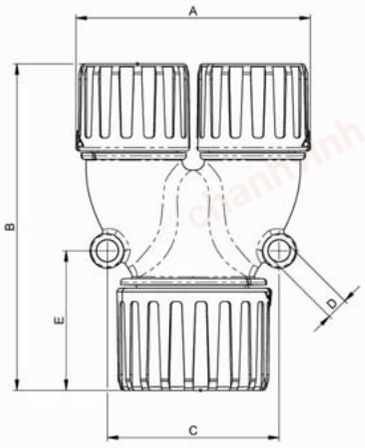

Conduit In	Conduits Out	Part Number	Nominal Dimensions (mm)					
			A	B	C	D	E	F
16	13	FPAX16-13-13#	49	77	24	4.0	33	29
21	16	FPAX21-16-16#	59	89	32	5.0	33	32
28	21	FPAX28-21-21#	67	93	49	6.0	40	45
34	28	FPAX34-28-28#	90	116	48	6.5	43	51
42	34	FPAX42-34-34#	105	133	58	8.5	50	63
54	42	FPAX54-42-42#	128	162	70	8.5	56	77

NB: # add B for Black or G for Grey

Material;
Fitting: Nylon PA66
Conduit Seal: Polyester elastomer

Colour:
Black as standard.

Grey (RAL7031) available on request

Fire Performance:
Low Fire Hazard
- Halogen, Sulphur & Phosphorous Free
For full details of fire performance details of PA66 fittings see data sheet reference DS601

IP Rating:

FPAX: IP66, IP67, IP68 (2Bar), IP69

Applications:
Reducing in-line divider suitable for dividing circuits and enabling a reduction of conduit sizes within an in-stallation.

Features:
- One piece
- Fast Fit
- UV Resistant - Black
- Anti vibration and tamper resistant
- Suitable for fine or coarse pitch conduits
- Complete with 2 fixing bosses
- Rounded Internal Corners ease cable insertion
- Can be removed using a screwdriver if required

Temperature Performance:

-50°C to +135°C

Compliance, Approvals & Accreditation;

IEC EN 61386

EN 61386 Classification Available on request

Vibration and Shock resistant to EN 61373 Cat 2

Typical Applications;

Construction
Rail
Machinery and OEM's
Defence

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.