chanhvinh.com

Spring Plungers • with pin and internal hexagon

EH 22030.



Product Description

Spring plungers can be used for locking as well as for applying or ejecting pressure.

Material

Pin
- Free cutting steel, hardened, blackened
- Stainless Steel 1.4305, nitrided

Body
- Free cutting steel, blackened
- Stainless steel 1.4305

Spring
- Stainless steel

More information

Notes

Customized design on request.
Spring plungers are specially tested for spring range and spring load.

References

Thread lock on request.

Further products

- Holders, for spring plungers
- Spring Plungers, with pin and internal hexagon - INCH

Drawing

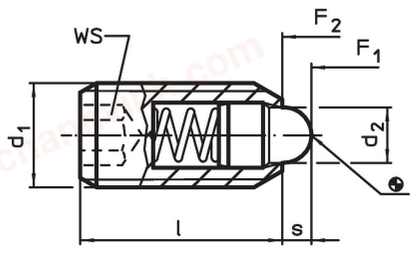

Order information

Dimensions			WS	Stroke	Spring load[1]				Art. No.
d_1	d_2	l		s	F_1 ~	F_2 ~	max.		
[mm]			[mm]	[mm]	[N]		[°C]	[g]	
free cutting steel, standard spring load									
M 4	1.8	12	2.0	1.5	4.5	12.5	250	0.6	22030.0104
M 5	2.4	14	2.5	2.0	5.0	13.0	250	1.2	22030.0105
M 6	2.7	15	3.0	2.0	6.0	17.0	250	1.8	22030.0106
M 8	3.8	18	4.0	2.0	16.0	33.0	250	4.1	22030.0108
M10	4.5	23	5.0	2.5	19.0	42.0	250	8.4	22030.0110
M12	6.2	26	6.0	3.5	22.0	57.0	250	13.0	22030.0112
M16	8.5	33	8.0	4.5	38.0	78.0	250	32.0	22030.0116
M20	10.0	43	10.0	6.5	39.0	81.0	250	67.0	22030.0120
M24	13.0	48	12.0	8.0	72.0	155.0	250	106.0	22030.0124
free cutting steel, heavy spring load									
M 4	1.8	12	2.0	1.5	6.4	18.0	250	0.6	22030.0144
M 5	2.4	14	2.5	2.0	8.0	17.0	250	1.2	22030.0145
M 6	2.7	15	3.0	2.0	11.0	25.0	250	1.8	22030.0146
M 8	3.8	18	4.0	2.0	23.0	59.0	250	4.1	22030.0148
M10	4.5	23	5.0	2.5	20.0	54.0	250	8.4	22030.0150
M12	6.2	26	6.0	3.5	38.0	96.0	250	13.0	22030.0152
M16	8.5	33	8.0	4.5	50.0	100.0	250	32.0	22030.0156
M20	10.0	43	10.0	6.5	52.0	133.0	250	68.0	22030.0160
M24	13.0	48	12.0	8.0	91.0	223.0	250	106.0	22030.0164
stainless steel, standard spring load									
M 4	1.8	12	2.0	1.5	4.5	12.5	250	0.6	22030.0304
M 5	2.4	14	2.5	2.0	5.0	13.0	250	1.2	22030.0305
M 6	2.7	15	3.0	2.0	6.0	17.0	250	1.9	22030.0306

[1] statistical average value

chanhvinh.com

Dimensions			WS	Stroke	Spring load[1]				Art. No.
d_1	d_2	l		s	F_1 ~	F_2 ~	max.		
[mm]			[mm]	[mm]	[N]		[°C]	[g]	
M 8	3.8	18	4.0	2.0	16.0	33.0	250	4.2	22030.0308
M10	4.5	23	5.0	2.5	19.0	42.0	250	8.4	22030.0310
M12	6.2	26	6.0	3.5	22.0	57.0	250	13.0	22030.0312
M16	8.5	33	8.0	4.5	38.0	78.0	250	32.0	22030.0316
M20	10.0	43	10.0	6.5	39.0	81.0	250	68.0	22030.0320
M24	13.0	48	12.0	8.0	72.0	155.0	250	107.0	22030.0324
stainless steel, heavy spring load									
M 4	1.8	12	2.0	1.5	6.4	18.0	250	0.6	22030.0344
M 5	2.4	14	2.5	2.0	8.0	17.0	250	1.2	22030.0345
M 6	2.7	15	3.0	2.0	11.0	25.0	250	1.9	22030.0346
M 8	3.8	18	4.0	2.0	23.0	59.0	250	4.2	22030.0348
M10	4.5	23	5.0	2.5	20.0	54.0	250	8.4	22030.0350
M12	6.2	26	6.0	3.5	38.0	96.0	250	13.0	22030.0352
M16	8.5	33	8.0	4.5	50.0	100.0	250	32.0	22030.0356
M20	10.0	43	10.0	6.5	52.0	133.0	250	68.0	22030.0360
M24	13.0	48	12.0	8.0	91.0	223.0	250	108.0	22030.0364

[1] statistical average value

Application example

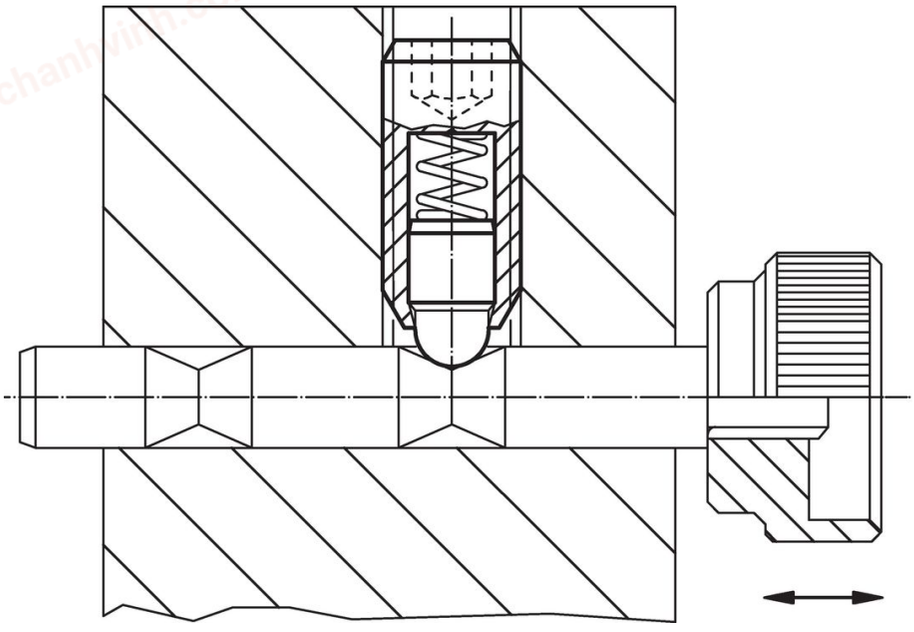

Compliance

For detailed compliance information please select the desired article number.