chanhvinh.com

Clamping Catches

EH 22260.



Product Description

Clamping catches have a round running taper surface and enable fast and safe clamping and releasing with a relatively large adjustment range and high tensioning force. Due to the small gradient angle of the taper surface, the clamping catch is self-locking.

Material

Body
- Steel, case-hardened, blackened
- Stainless steel 1.4305, nickel-plated

Screw
- Steel, nitrided
- Stainless steel 1.4021, heat-treated, nickel-plated

Gear lever handle
- Steel, ground, blackened
- Stainless steel 1.4305, dull blasted

Ball knob
- Thermosetting plastic PF 31, black, DIN 319

Assembly

Fix with screw bolt M 10 (WS 6). Ensure a tightening torque of max. 40 Nm.

Operation


The screw bolt and washer are designed to work together with a thrust washer, allowing the clamping catch to be easily turned to the desired position after installation. On Art. No. 22260.0250 / .0251 and 22260.0450 / .0451, the clamping lever can be positioned via the serration.


More information

Notes

Left turn type can be supplied on request.

Drawing

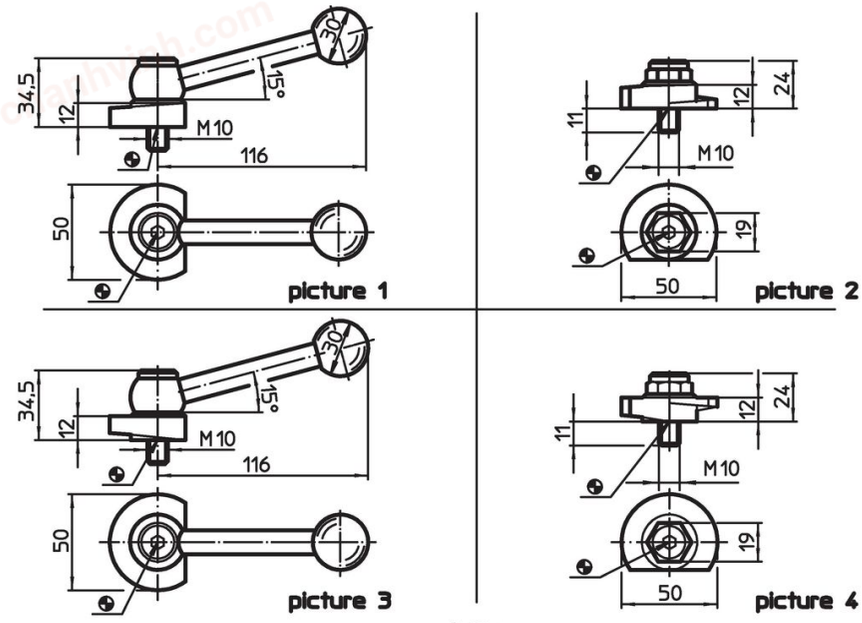

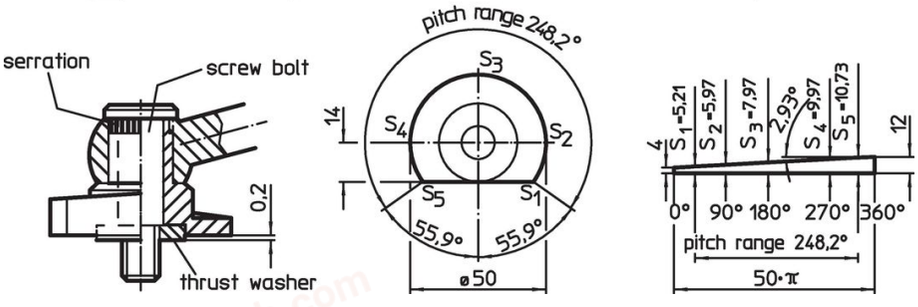


chanhvinh.com

Order information

Tightening torque max. [Nm]	[g]	Art. No.
with adjustable tension lever, pitch opposite to bearing surface – picture 1, Steel		
40	304	22260.0250
with adjustable tension lever, pitch opposite to bearing surface – picture 1, Stainless steel		
40	310	22260.0251
with clamping screw, pitch opposite to bearing surface – picture 2, Steel		
40	154	22260.0350
with clamping screw, pitch opposite to bearing surface – picture 2, Stainless steel		
40	154	22260.0351
with adjustable tension lever, pitch on bearing surface – picture 3, Steel		
40	312	22260.0450
with adjustable tension lever, pitch on bearing surface – picture 3, Stainless steel		
40	317	22260.0451
with clamping screw, pitch on bearing surface – picture 4, Steel		
40	154	22260.0550
with clamping screw, pitch on bearing surface – picture 4, Stainless steel		
40	153	22260.0551

chanhvinh.com

Application example

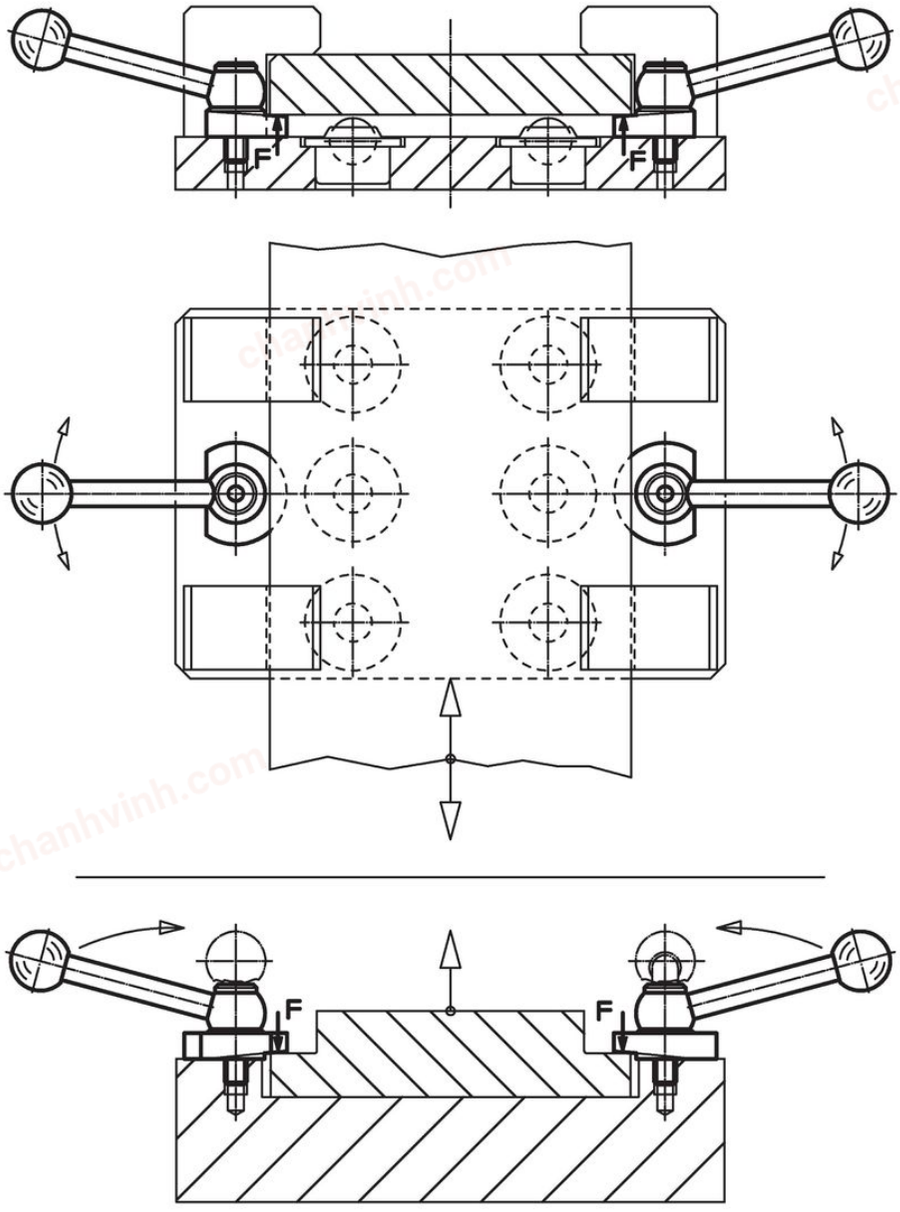

Compliance

For detailed compliance information please select the desired article number.