chanhvinh.com

Socket rear stock, lateral · for sling swivels Ø9,5 mm, 360° rotatable

EH 22330.



Product Description

Allows the sling swivel to be attached to the side of wooden and plastic stocks.
Allows continuous rotation of the sling when locked. Ideal for carrying the weapon more comfortably when searching for the game.

Material

Bushing
- Stainless steel 1.4305, black

Lock nut
- Stainless Steel

Disc
- Stainless Steel

Assembly

Easily mounted by an experienced gunsmith in only 30 minutes!
Installation instruction plastic stock:
1. Drill the locating hole Ø 14 mm.
2. Insert socket and secure with nut and washer.

Installation instruction wood stock:
1. Pre-drill core hole Ø 12,5 mm.
2. Insert thread M14x1,5.
3. Screw in socket and secure with adhesive.

Drawing

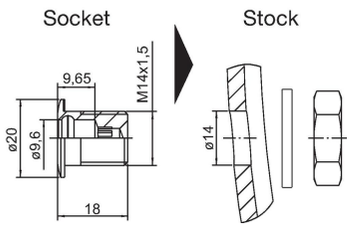

Order information

Nominal diameter [mm]	Suitable for	Art. No.
9.5	22330.0560	**22330.0554**

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.