chanhvinh.com

Sockets for wood · for sling swivels Ø9,5 mm, 360° rotatable

EH 22330.



Product Description

Sockets can also be ordered separately from each other. The scope of delivery of the “sockets without sling swivels” contain 2 identical sockets.


Material

Bushing
- Stainless steel 1.4305, black

Assembly

Easily mounted by an experienced gunsmith in only 30 minutes!
Installation instructions for wood:
1. Drill locating hole and pilot hole for locking screw according to specifications.
2. The use of adhesive for securing is recommended.
3. Press socket in locating hole.
4. Secure socket with screw.

Drawing

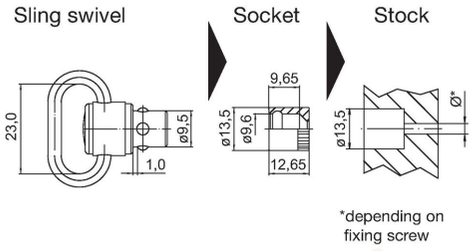

Order information

Nominal diameter [mm]	Location hole: Bore Hole D Ø [mm]	Location hole: depth of bore hole [mm]	Suitable for	Art. No.
9.5	13.5	12.65	22330.0560	22330.0536

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.