chanhvinh.com

Stud Adapter and Socket for wood • Ø9,5 mm, 360° rotatable

EH 22330.





Product Description

By using a stud adapter, slings with sling swivels with bolt can be used with the PUSH & GO system. To do this, the stud adapter is unlocked with the enclosed Allen key and latched into the socket. The sling swivels with bolt are then latched into the stud adapter. Furthermore stud adapters can be used to attach bipods to the gun, e.g. from Harris.

Material

Pin part
- Stainless steel 1.4305, black


Bushing
- Stainless steel 1.4305, black

Spring
- Stainless steel

Assembly

Easily mounted by an experienced gunsmith in only 30 minutes!
Installation instructions for wood:
1. Drill locating hole and pilot hole for locking screw according to specifications.
2. The use of adhesive for securing is recommended.
3. Press socket in locating hole.
4. Secure socket with screw.

Drawing

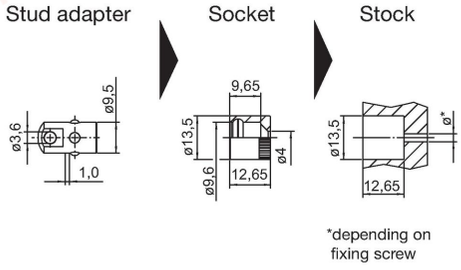

Order information

Nominal diameter [mm]	Location hole: Bore Hole Ø [mm]	Location hole: depth of bore hole [mm]	Load capacity for static load max. [kN]	Art. No.
9.5	13.5	12.65	1.2	22330.0585

chanhvinh.com

Compliance

RoHS-compliant
Contains lead – Compliant with Exemption 6(a)-I.

Contains SVHC substances >0,1% w/w
Contains lead - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Contains Proposition 65 substances

Nickel can cause cancer from exposure. / Lead can lead to cancer, developmental disorders, and reproductive damage in men and to reproductive damage in women from exposure.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.