chanhvinh.com

Sling Swivels and Barrel Mount · Ø6 mm, for barrel 18 mm (Kal. 20), for slings up to 23 mm, fixed position

EH 22330.





Product Description

To make the shotgun easier to carry, the rifle sling is attached to the barrel. Previously, this required a laborious process where the sling swivel was soldered to the barrel. The unique barrel mount makes installation extremely simple. All that needs to be done is to place it at the correct position then glue and fix in place using a socket screw.

Material

Pin part
- Stainless steel 1.4542, black

Clamp collar
- Stainless steel 1.4404, matt black

Screw
- Stainless steel A2

Spring
- Stainless steel

Assembly


Easily mounted by an experienced gunsmith in only 30 minutes!
Mounting on the barrel:
1. Apply adhesive to the inside of the barrel mount.
2. Position barrel mount on the barrel.
3. Fasten barrel mount with hexagon socket screw WS 2.

More information

Further products

- Sling Swivels and Socket for wood, Ø6 mm, fixed position, for slings up to 23 mm
- Sling Swivels and Socket for plastic, Ø6 mm, fixed position, for slings up to 23 mm

Drawing

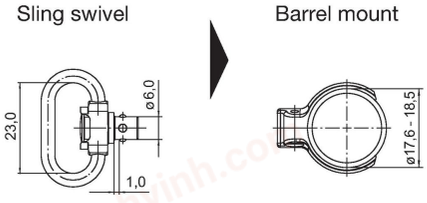

Order information

Nominal diameter [mm]	Dimensions swivel width [mm]	Load capacity for static load max. [kN]	Art. No.
6	23	1.2	22330.0571

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.