chanhvinh.com

Sling Swivels and Socket · for Blaser R8 / R93 (6,0 mm / M5), for slings up to 23 mm, fixed position

EH 22330.



Product Description

This set, consisting of a sling swivel and socket, is a special modification kit for the front stock of most Blaser R8/R93 models (with screw-in stud).
Installation is straightforward by simply replacing the Blaser stud with the M5 port.
For a complete modification, we recommend the sling swivels and sockets that can be installed on the rear stock.

Material

Pin part
- Stainless steel 1.4542, black

Bushing
- Stainless steel 1.4305, black

Spring
- Stainless steel

Assembly


Mounted easily and quickly in a few simple steps!
Installation in Blaser R8/R93:
1. Unscrew original Blaser stud from front stock
2. Screw in Halder socket.
3. The use of adhesive for securing is recommended.

More information

Further products

- Sling Swivels and Socket for wood, Ø6 mm, fixed position, for slings up to 23 mm
- Sling Swivels and Socket for plastic, Ø6 mm, fixed position, for slings up to 23 mm

Drawing

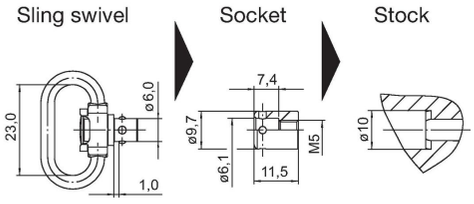

Order information

Nominal diameter [mm]	Dimensions swivel width [mm]	Load capacity for static load max. [kN]	Art. No.
6	23	1.2	22330.0550

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.