chanhvinh.com

Locating Bushings • for lifting pins
EH 22350.



Product Description

Locating bushings are used for quick and safe locating of lifting pins EH 22350 / EH 22351. Corrosion and abrasion resistant.


Material

- Stainless steel 1.4542, precipitation-hardened

Assembly

Safe tolerances and consistent function.
Easily incorporated into different materials
Can be mounted in blind holes.
For thin-walled parts, lock nuts are used for assembly.

Drawing

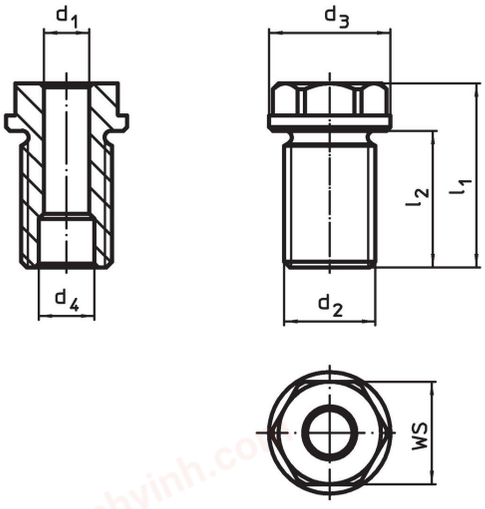


Order information

Dimensions d_1 H11 [mm]	Dimensions d_2 [mm]	For nominal length [mm]	Dimensions d_3 -0.2 [mm]	Dimensions d_4 +0.3 [mm]	Dimensions l_1 [mm]	Dimensions l_2 [mm]	WS [mm]	Tightening torque max. [Nm]	x [mm]	Load capacity F_1 [kN]	Load capacity F_2 [kN]	Load capacity F_3 [kN]	For lifting pin	[g]	Art. No.
8	M16 x 1,5	10	24	9.8	27.5	20	19	90	1.5	1.5	1.2	0.5	22350.0601 / .0701	34	22350.0900
8	M16 x 1,5	15	24	9.8	27.5	20	19	90	1.5	1.5	1.2	0.5	22350.0602 / .0702	35	22350.0902
8	M16	25	24	9.8	37.5	25	19	75	1.5	1.5	1.2	0.5	22350.0604 / .0704	47	22350.0904
8	M16	35	24	9.8	47.5	35	19	75	1.5	1.5	1.2	0.5	22350.0606 / .0706	57	22350.0906
10	M20 x 1,5	15	28	12.2	35.5	24	24	145	1.5	2.7	2.4	2.1	22350.0621 / .0721	71	22350.0910
10	M20 x 1,5	25	28	12.2	35.5	24	24	145	1.5	2.7	2.4	2.1	22350.0623 / .0723	74	22350.0912
10	M20	35	28	12.2	46.0	29	24	130	1.5	2.7	2.4	2.1	22350.0625 / .0725	94	22350.0914
10	M20	50	28	12.2	65.0	49	24	130	1.5	2.7	2.4	2.1	22350.0627 / .0727	117	22350.0916
12	M24 x 1,5	15	32	14.7	35.5	24	27	220	1.5	3.5	3.2	2.8	22350.0631 / .0731	96	22350.0920
12	M24 x 1,5	25	32	14.7	36.5	24	27	220	1.5	3.5	3.2	2.8	22350.0633 / .0733	103	22350.0922
12	M24	35	32	14.7	48.5	36	27	200	1.5	3.5	3.2	2.8	22350.0635 / .0735	120	22350.0924
12	M24	50	32	14.7	72.5	60	27	200	1.5	3.5	3.2	2.8	22350.0637 / .0737	164	22350.0926
16	M30 x 2	25	39	19.2	44.0	29	30	440	1.5	4.8	4.5	4.1	22350.0641 / .0741	164	22350.0930

chanhvinh.com

Dimensions d_1 H11 [mm]	Dimensions d_2 [mm]	For nominal length [mm]	Dimensions d_3 -0.2 [mm]	Dimensions d_4 +0.3 [mm]	Dimensions l_1 [mm]	Dimensions l_2 [mm]	WS [mm]	Tightening torque max. [Nm]	x [mm]	Load capacity F_1 [kN]	Load capacity F_2 [kN]	Load capacity F_3 [kN]	For lifting pin	[g]	Art. No.
16	**M30**	**50**	39	19.2	66.0	44	30	400	1.5	4.8	4.5	4.1	22350.0643 / .0743	238	22350.0934
16	**M30**	**75**	39	19.2	96.0	74	30	400	1.5	4.8	4.5	4.1	22350.0645 / .0745	325	22350.0936
20	**M36 x 2**	**50**	43	26.0	70.0	55	36	440	1.5	10.0	8.5	6.5	22350.0673 / .0773	353	22350.0954
20	**M36 x 2**	**75**	43	26.0	95.0	80	36	440	1.5	10.0	8.5	6.5	22350.0675 / .0775	470	22350.0956

Application example

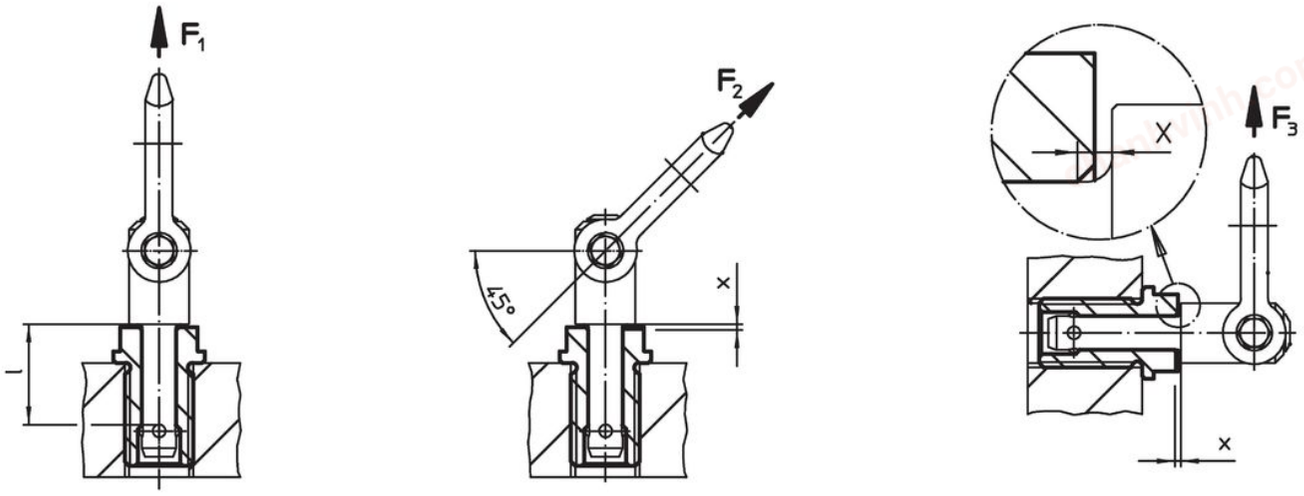

Compliance

For detailed compliance information please select the desired article number.