chanhvinh.com



# Seating Pins • adjustable

## EH 22690.



### Product Description


The adjustable seating pins with induction hardened bearing surface can be used as seats and stops.

#### Material

**Seating Pins**
- Heat-treated steel, tempered, quality 10.9, blackened / bearing surface induction hardened

**Nut**
- Heat-treated steel, tempered, quality 8.8 (ISO 4035), blackened

### Drawing

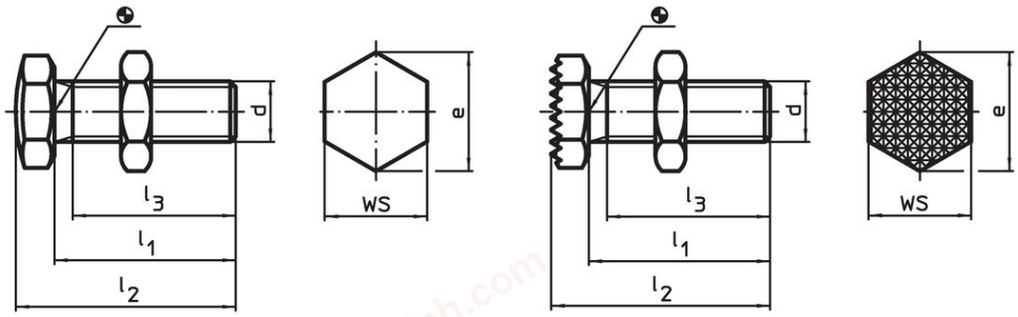


picture 1 picture 2


### Order information

| d | Dimensions $l_1$ ±1.5 [mm] | Dimensions $l_2$ ±1.5 [mm] | Dimensions $l_3$ min. [mm] | e | WS [mm] | [g] | Art. No. |
|---|---|---|---|---|---|---|---|
| **bearing surface spherical – picture 1** | | | | | | | |
| **M 6** | **20** | 23.5 | 19.0 | 11.5 | 10 | 6.8 | 22690.0606 |
| **M 8** | **25** | 30.0 | 21.0 | 14.5 | 13 | 15.0 | 22690.0608 |
| **M10** | **30** | 36.0 | 25.5 | 19.6 | 17 | 30.0 | 22690.0610 |
| **M12** | **35** | 42.0 | 29.7 | 21.9 | 19 | 48.0 | 22690.0612 |
| **M16** | **40** | 49.5 | 34.0 | 27.7 | 24 | 102.0 | 22690.0616 |
| **M20** | **45** | 57.0 | 37.0 | 34.6 | 30 | 188.0 | 22690.0620 |
| **M24** | **50** | 64.0 | 40.0 | 41.6 | 36 | 308.0 | 22690.0624 |
| **bearing surface ribbed – picture 2** | | | | | | | |
| **M 6** | **20** | 23.5 | 19.0 | 11.5 | 10 | 6.7 | 22690.0626 |
| **M 8** | **25** | 30.0 | 21.0 | 14.5 | 13 | 15.0 | 22690.0628 |
| **M10** | **30** | 36.0 | 25.5 | 19.6 | 17 | 31.0 | 22690.0630 |
| **M12** | **35** | 42.0 | 29.7 | 21.9 | 19 | 48.0 | 22690.0632 |
| **M16** | **40** | 49.5 | 34.0 | 27.7 | 24 | 103.0 | 22690.0636 |
| **M20** | **45** | 57.0 | 37.0 | 34.6 | 30 | 184.0 | 22690.0640 |
| **M24** | **50** | 64.0 | 40.0 | 41.6 | 36 | 308.0 | 22690.0644 |

chanhvinh.com



## Application example

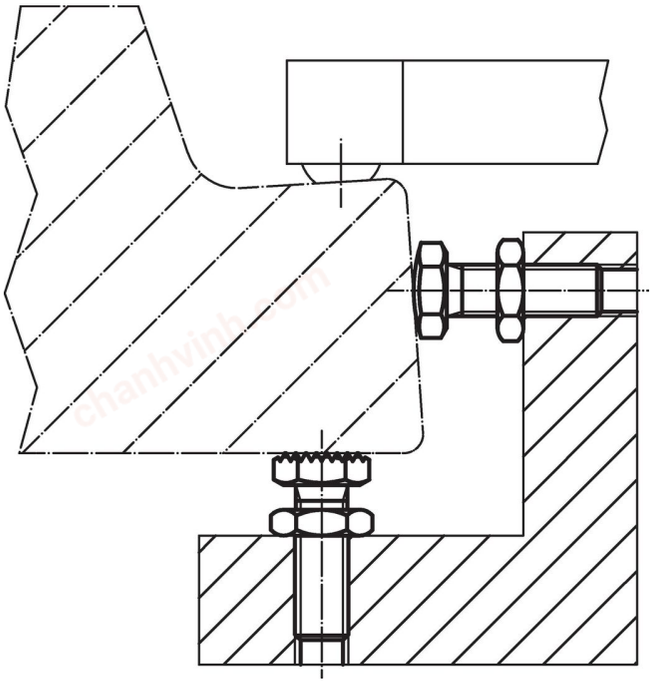

## Compliance

For detailed compliance information please select the desired article number.