chanhvinh.com

Self-Aligning Pads • with hard metal ball, ribbed

EH 22730.



Product Description

Especially designed for cast parts (hard casting crust). To be used as support, thrust pad and for build into clamping elements.

Material

Ball
- Hard metal, ribbed, nickel-plated

Body
- Heat-treated steel, tempered, phosphated
- Stainless steel 1.4057, heat-treated

More information

Notes

Ball protected against rotating.
Loading capacity valid for steel and stainless steel designs.

Drawing

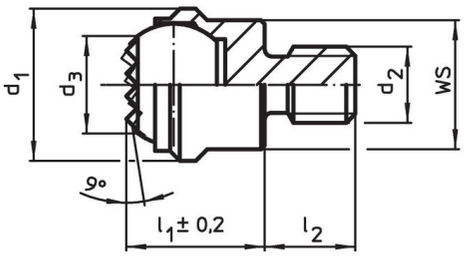



Order information

d_1	d_2	Dimensions d_3	l_1 ±0.2	l_2 -0.5	Ball diameter	WS	Load capacity for static load max.	Tightening torque max.		Art. No.
[mm]						[mm]	[kN]	[Nm]	[g]	
with male thread, flat-faced ball, bearing surface ribbed, Heat-treated steel										
13	**M 6**	8.3	13	8	10	11	10	10	14	22730.0362
13	**M 8**	8.3	13	8	10	11	10	25	15	22730.0363
20	**M 8**	13.2	18	10	16	17	25	25	50	22730.0378
20	**M10**	13.2	18	10	16	17	25	46	51	22730.0379
20	**M12**	13.2	18	12	16	17	25	82	54	22730.0380
30	**M16**	20.0	27	16	25	27	90	206	187	22730.0381
50	**M20**	34.5	35	20	40	41	165	407	630	22730.0382
50	**M24**	34.5	35	24	40	41	165	698	660	22730.0383
with male thread, flat-faced ball, bearing surface ribbed, Stainless steel										
13	**M 6**	8.3	13	8	10	11	10	10	14	22730.0390
13	**M 8**	8.3	13	8	10	11	10	25	15	22730.0392
20	**M 8**	13.2	18	10	16	17	25	25	49	22730.0394
20	**M10**	13.2	18	10	16	17	25	46	50	22730.0396
20	**M12**	13.2	18	12	16	17	25	82	54	22730.0398
30	**M16**	20.0	27	16	25	27	90	206	186	22730.0399
50	**M20**	34.5	35	20	40	41	165	407	632	22730.0400
50	**M24**	34.5	35	24	40	41	165	698	660	22730.0401

chanhvinh.com

Application example

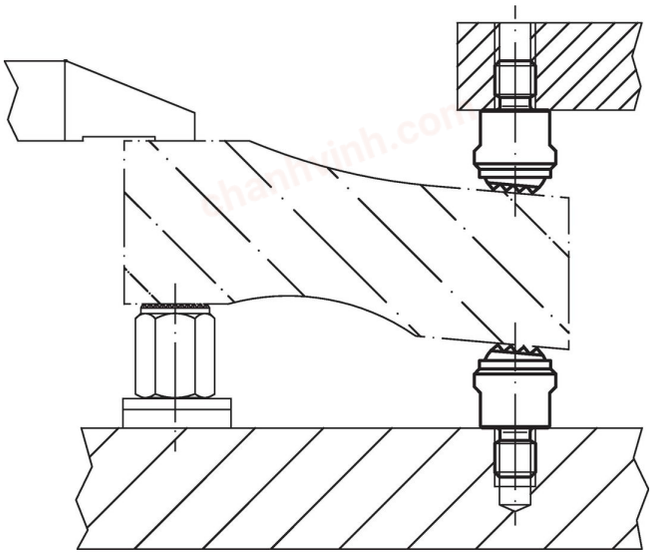

Compliance

For detailed compliance information please select the desired article number.