chanhvinh.com

Positioning Sensors • pneumatical

EH 22800.



Product Description

Used in jigs and fixtures as positioning control for pre-machined workpieces.
Sensitivity accuracy is 0.015-0.075 mm, depending on the workpiece surface.
Contact control is achieved through compressed air backwash and is indicated on the monitoring unit.

Material

Seating Pins
- Tool steel, hardened, ground

Seal
- PVC

Screw
- Steel, zinc-plated by galvanization, quality 4.8 (ISO 1207)

Plug-in nipple
- Brass

More information


Notes

Further information on request.


Further products

- Monitoring Units, for positioning sensors, pneumatic

Drawing

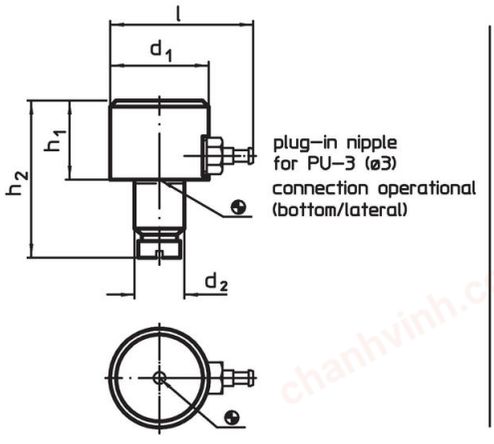

picture 1




picture 2

Order information

d_1	h_1 h9	d_2 n6	h_2	h_3	l		Art. No.
			[mm]			[g]	
bottom/lateral connection – picture 1							
16	**13**	8	27.0	–	28.0	24	22800.0010
25	**20**	12	39.0	–	36.5	93	22800.0020
bottom connection – picture 2							
16	**5**	8	28.5	15	–	11	22800.0100

chanhvinh.com

Application example

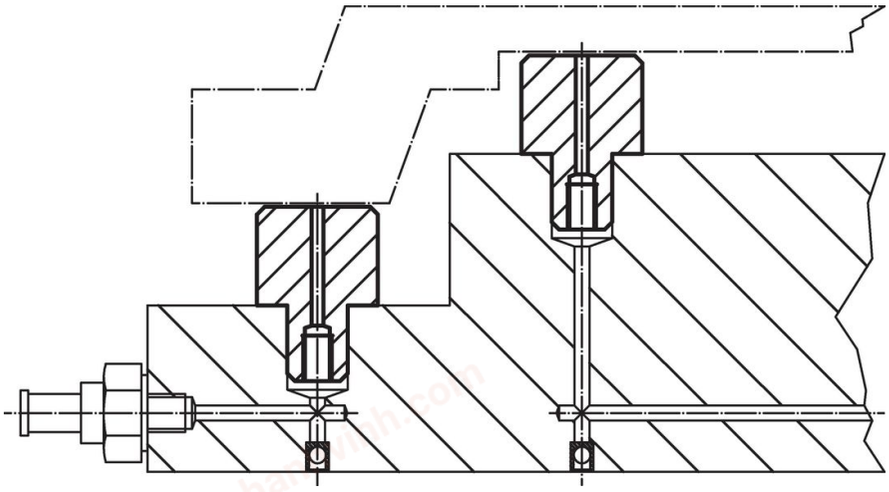

Compliance

For detailed compliance information please select the desired article number.