
chanhvinh.com

Taper Clamping Units • plain / ribbed, M8

EH 23250.

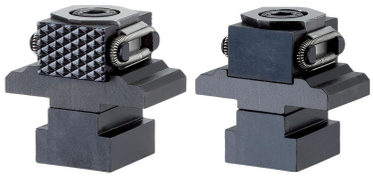

Product Description

Inserting the socket head screw moves the two clamping chucks outwards and presses the workpieces against a stop. Stroke of taper clamping units with M8 = +/- 0.5 mm, M12 = +/- 1 mm.

Material

Body
- Tool steel, hardened, bright

Screw
- Heat-treated steel, tempered, quality 12.9

Spring
- Spring steel wire

Clamping jaws
- Tool steel, hardened, blackened and ground

More information


Notes

Clamping jaws protected against rotating

Further products

- Taper Clamping Units

Drawing

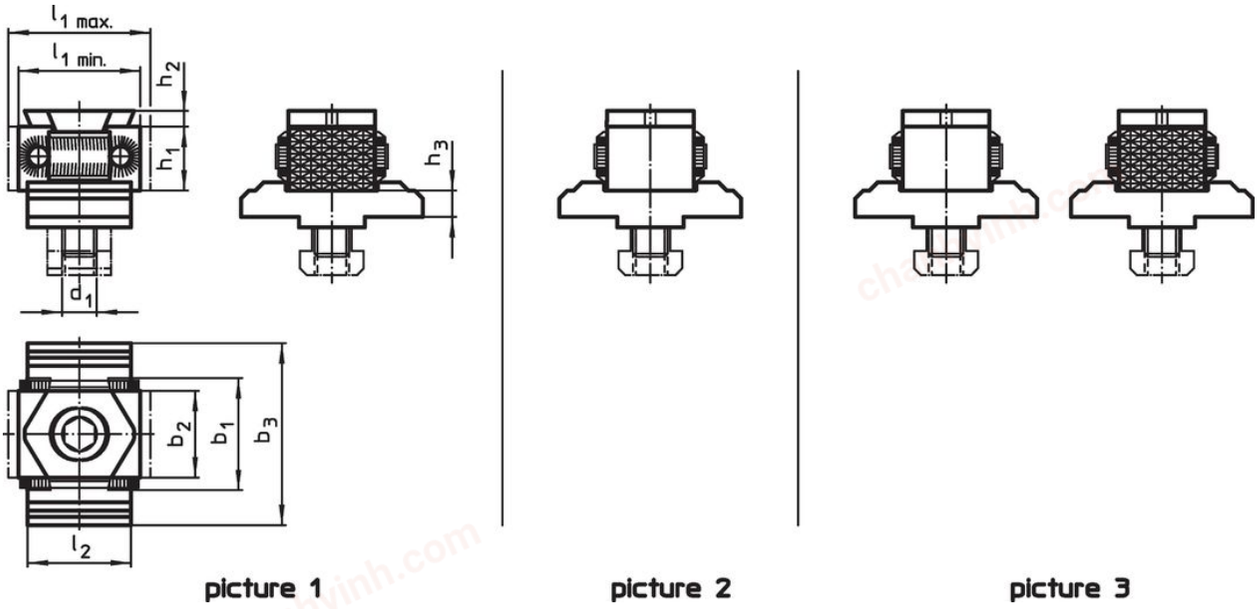

picture 1 picture 2 picture 3

Order information

d1	l1 min.	l1 max.	l2	b1	b2	b3	h1	h2	h3	[g]	Art. No.
				Dimensions [mm]							
clamping jaw, ribbed on both sides – picture 1											
M8	27	31	25	29	21	44	15	2.5	6.4	206	23250.0501
clamping jaw, plain on both sides – picture 2											
M8	27	31	25	29	21	44	15	2.5	6.4	200	23250.0502
clamping jaw, plain and ribbed – picture 3											
M8	27	31	25	29	21	44	15	2.5	6.4	210	23250.0503

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.