chanhvinh.com

Taper Clamping Units • with screw fastened thread, M12

EH 23250.



Product Description

Inserting the socket head screw moves the two clamping chucks outwards and presses the workpieces against a stop. Stroke of taper clamping units with M8 = +/- 0.5 mm, M12 = +/- 1 mm.

Material

Body
- Tool steel, hardened, bright

Screw
- Heat-treated steel, tempered, quality 12.9


Spring
- Spring steel wire

Clamping jaws
- Tool steel, hardened, blackened and ground

More information

Further products
- Taper Clamping Units

Drawing

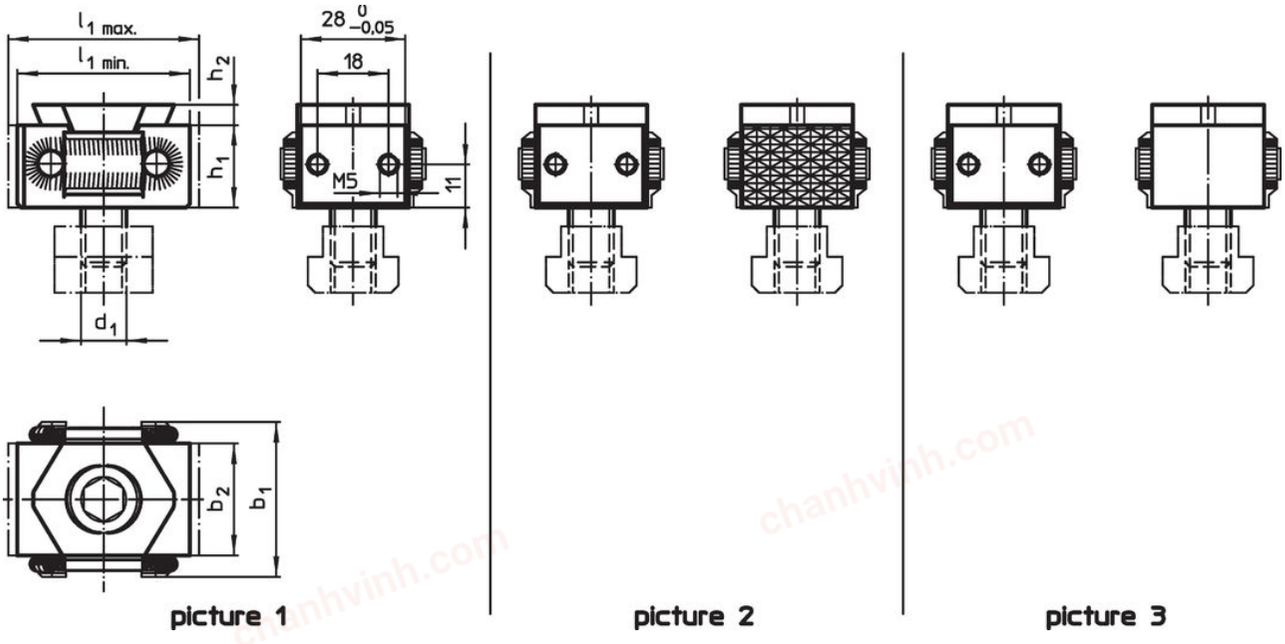

Order information

Dimensions								Art. No.
d_1	l_1 min.	l_1 max.	b_1	b_2	h_1	h_2	[g]	
		[mm]						
clamping jaw with mounting thread on both sides – picture 1								
M12	47.0	54.0	41	30	22	4	303	23250.0513
clamping jaw, ribbed and with mounting thread – picture 2								
M12	44.5	51.5	41	30	22	4	297	23250.0514
clamping jaw, plain and with mounting thread – picture 3								
M12	44.5	51.5	41	30	22	4	297	23250.0515

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.