chanhvinh.com

Adjustable Clamping Levers • with clamping screw

EH 24410.



Product Description

Adjustable clamping levers find versatile applications when the area of use is confined or a specific lever position is required.

Material

Lever
- Zinc die-cast, plastic coated, orange similar to RAL 2004, matt structure
- Zinc die-cast, plastic coated, silver, similar to RAL 9006, matt structure
- Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure

Inner parts
- Steel, blackened, quality 5.8

Screw
- Steel, blackened, quality 5.8

Operation

By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

More information

Notes

The screw part can be exchanged.


References

The version with ball-headed (picture 3) can be combined with the thrust piece, plastic (EH 22570.).

Further products

- Thrust Pads, plastic

Drawing

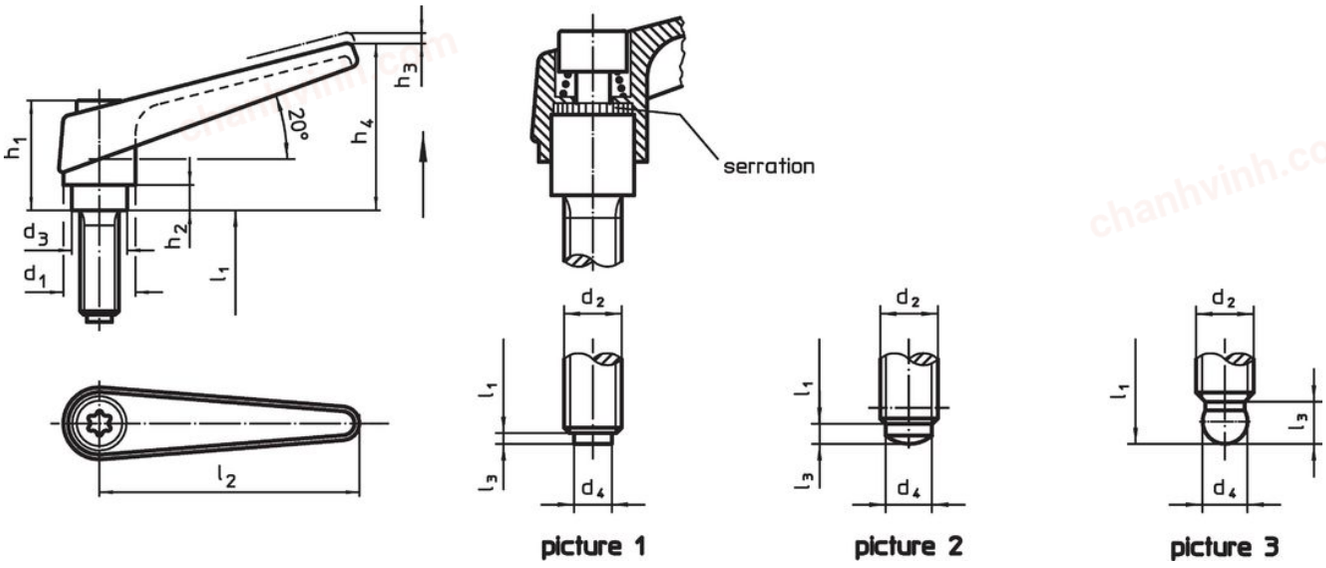

Order information

Dimensions [mm]												Art. No.
d_1	d_2	l_1	d_3	d_4	h_1	h_2	h_3	h_4	l_2	l_3	[g]	
with plastic thrust pin – picture 1, orange												
14	**M 6**	**16**	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0141
14	**M 6**	**20**	10.0	4.0	24.5	4.0	3	35	45	1.0	42	24410.0151
14	**M 6**	**25**	10.0	4.0	24.5	4.0	3	35	45	1.0	38	24410.0161
14	**M 6**	**32**	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0171
14	**M 6**	**40**	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0181
14	**M 6**	**50**	10.0	4.0	24.5	4.0	3	35	45	1.0	45	24410.0191
18	**M 8**	**20**	13.5	6.0	31.0	6.5	3	45	62	1.0	81	24410.0341
18	**M 8**	**25**	13.5	6.0	31.0	6.5	3	45	62	1.0	80	24410.0351
18	**M 8**	**32**	13.5	6.0	31.0	6.5	3	45	62	1.0	86	24410.0361
18	**M 8**	**40**	13.5	6.0	31.0	6.5	3	45	62	1.0	86	24410.0371
18	**M 8**	**50**	13.5	6.0	31.0	6.5	3	45	62	1.0	60	24410.0381
18	**M 8**	**63**	13.5	6.0	31.0	6.5	3	45	62	1.0	95	24410.0391

chanhvinh.com

Dimensions												Art. No.
d_1	d_2	l_1	d_3	d_4	h_1	h_2	h_3	h_4	l_2	l_3		
[mm]											[g]	
18	**M10**	**20**	13.5	8.0	31.0	6.5	3	45	62	2.0	90	24410.0441
18	**M10**	**25**	13.5	8.0	31.0	6.5	3	45	62	2.0	130	24410.0451
18	**M10**	**32**	13.5	8.0	31.0	6.5	3	45	62	2.0	134	24410.0461
18	**M10**	**40**	13.5	8.0	31.0	6.5	3	45	62	2.0	94	24410.0471
18	**M10**	**50**	13.5	8.0	31.0	6.5	3	45	62	2.0	100	24410.0481
18	**M10**	**63**	13.5	8.0	31.0	6.5	3	45	62	2.0	148	24410.0491
with plastic thrust pin – picture 1, silver												
14	**M 6**	**16**	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0143
14	**M 6**	**20**	10.0	4.0	24.5	4.0	3	35	45	1.0	38	24410.0153
14	**M 6**	**25**	10.0	4.0	24.5	4.0	3	35	45	1.0	38	24410.0163
14	**M 6**	**32**	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0173
14	**M 6**	**40**	10.0	4.0	24.5	4.0	3	35	45	1.0	41	24410.0183
14	**M 6**	**50**	10.0	4.0	24.5	4.0	3	35	45	1.0	45	24410.0193
18	**M 8**	**20**	13.5	6.0	31.0	6.5	3	45	62	1.0	81	24410.0343
18	**M 8**	**25**	13.5	6.0	31.0	6.5	3	45	62	1.0	80	24410.0353
18	**M 8**	**32**	13.5	6.0	31.0	6.5	3	45	62	1.0	86	24410.0363
18	**M 8**	**40**	13.5	6.0	31.0	6.5	3	45	62	1.0	81	24410.0373
18	**M 8**	**50**	13.5	6.0	31.0	6.5	3	45	62	1.0	84	24410.0383
18	**M 8**	**63**	13.5	6.0	31.0	6.5	3	45	62	1.0	94	24410.0393
18	**M10**	**20**	13.5	8.0	31.0	6.5	3	45	62	2.0	128	24410.0443
18	**M10**	**25**	13.5	8.0	31.0	6.5	3	45	62	2.0	130	24410.0453
18	**M10**	**32**	13.5	8.0	31.0	6.5	3	45	62	2.0	100	24410.0463
18	**M10**	**40**	13.5	8.0	31.0	6.5	3	45	62	2.0	93	24410.0473
18	**M10**	**50**	13.5	8.0	31.0	6.5	3	45	62	2.0	100	24410.0483
18	**M10**	**63**	13.5	8.0	31.0	6.5	3	45	62	2.0	105	24410.0493
with plastic thrust pin – picture 1, black												
14	**M 6**	**16**	10.0	4.0	24.5	4.0	3	35	45	1.0	42	24410.0144
14	**M 6**	**20**	10.0	4.0	24.5	4.0	3	35	45	1.0	38	24410.0154
14	**M 6**	**25**	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0164
14	**M 6**	**32**	10.0	4.0	24.5	4.0	3	35	45	1.0	45	24410.0174
14	**M 6**	**40**	10.0	4.0	24.5	4.0	3	35	45	1.0	45	24410.0184
14	**M 6**	**50**	10.0	4.0	24.5	4.0	3	35	45	1.0	46	24410.0194
18	**M 8**	**20**	13.5	6.0	31.0	6.5	3	45	62	1.0	83	24410.0344
18	**M 8**	**25**	13.5	6.0	31.0	6.5	3	45	62	1.0	80	24410.0354
18	**M 8**	**32**	13.5	6.0	31.0	6.5	3	45	62	1.0	86	24410.0364
18	**M 8**	**40**	13.5	6.0	31.0	6.5	3	45	62	1.0	89	24410.0374
18	**M 8**	**50**	13.5	6.0	31.0	6.5	3	45	62	1.0	20	24410.0384
18	**M 8**	**63**	13.5	6.0	31.0	6.5	3	45	62	1.0	95	24410.0394
18	**M10**	**20**	13.5	8.0	31.0	6.5	3	45	62	2.0	128	24410.0444
18	**M10**	**25**	13.5	8.0	31.0	6.5	3	45	62	2.0	130	24410.0454
18	**M10**	**32**	13.5	8.0	31.0	6.5	3	45	62	2.0	92	24410.0464
18	**M10**	**40**	13.5	8.0	31.0	6.5	3	45	62	2.0	94	24410.0474
18	**M10**	**50**	13.5	8.0	31.0	6.5	3	45	62	2.0	100	24410.0484
18	**M10**	**63**	13.5	8.0	31.0	6.5	3	45	62	2.0	148	24410.0494
with brass thrust pin – picture 1, orange												
14	**M 6**	**16**	10.0	3.5	24.5	4.0	3	35	45	1.3	42	24410.1141
14	**M 6**	**20**	10.0	3.5	24.5	4.0	3	35	45	1.3	37	24410.1151
14	**M 6**	**25**	10.0	3.5	24.5	4.0	3	35	45	1.3	44	24410.1161
14	**M 6**	**32**	10.0	3.5	24.5	4.0	3	35	45	1.3	45	24410.1171
14	**M 6**	**40**	10.0	3.5	24.5	4.0	3	35	45	1.3	40	24410.1181
14	**M 6**	**50**	10.0	3.5	24.5	4.0	3	35	45	1.3	42	24410.1191
18	**M 8**	**20**	13.5	5.0	31.0	6.5	3	45	62	1.3	83	24410.1341
18	**M 8**	**25**	13.5	5.0	31.0	6.5	3	45	62	1.3	76	24410.1351
18	**M 8**	**32**	13.5	5.0	31.0	6.5	3	45	62	1.3	78	24410.1361
18	**M 8**	**40**	13.5	5.0	31.0	6.5	3	45	62	1.3	80	24410.1371
18	**M 8**	**50**	13.5	5.0	31.0	6.5	3	45	62	1.3	91	24410.1381
18	**M 8**	**63**	13.5	5.0	31.0	6.5	3	45	62	1.3	88	24410.1391
18	**M10**	**20**	13.5	6.5	31.0	6.5	3	45	62	1.9	127	24410.1441
18	**M10**	**25**	13.5	6.5	31.0	6.5	3	45	62	1.9	90	24410.1451

chanhvinh.com

Dimensions												Art. No.
d_1	d_2	l_1	d_3	d_4	h_1	h_2	h_3	h_4	l_2	l_3	[g]	
				[mm]								
18	**M10**	**32**	13.5	6.5	31.0	6.5	3	45	62	1.9	90	24410.1461
18	**M10**	**40**	13.5	6.5	31.0	6.5	3	45	62	1.9	100	24410.1471
18	**M10**	**50**	13.5	6.5	31.0	6.5	3	45	62	1.9	142	24410.1481
18	**M10**	**63**	13.5	6.5	31.0	6.5	3	45	62	1.9	110	24410.1491
with brass thrust pin – picture 1, silver												
14	**M 6**	**16**	10.0	3.5	24.5	4.0	3	35	45	1.3	36	24410.1143
14	**M 6**	**20**	10.0	3.5	24.5	4.0	3	35	45	1.3	37	24410.1153
14	**M 6**	**25**	10.0	3.5	24.5	4.0	3	35	45	1.3	44	24410.1163
14	**M 6**	**32**	10.0	3.5	24.5	4.0	3	35	45	1.3	45	24410.1173
14	**M 6**	**40**	10.0	3.5	24.5	4.0	3	35	45	1.3	40	24410.1183
14	**M 6**	**50**	10.0	3.5	24.5	4.0	3	35	45	1.3	42	24410.1193
18	**M 8**	**20**	13.5	5.0	31.0	6.5	3	45	62	1.3	83	24410.1343
18	**M 8**	**25**	13.5	5.0	31.0	6.5	3	45	62	1.3	76	24410.1353
18	**M 8**	**32**	13.5	5.0	31.0	6.5	3	45	62	1.3	78	24410.1363
18	**M 8**	**40**	13.5	5.0	31.0	6.5	3	45	62	1.3	80	24410.1373
18	**M 8**	**50**	13.5	5.0	31.0	6.5	3	45	62	1.3	50	24410.1383
18	**M 8**	**63**	13.5	5.0	31.0	6.5	3	45	62	1.3	88	24410.1393
18	**M10**	**20**	13.5	6.5	31.0	6.5	3	45	62	1.9	127	24410.1443
18	**M10**	**25**	13.5	6.5	31.0	6.5	3	45	62	1.9	129	24410.1453
18	**M10**	**32**	13.5	6.5	31.0	6.5	3	45	62	1.9	133	24410.1463
18	**M10**	**40**	13.5	6.5	31.0	6.5	3	45	62	1.9	137	24410.1473
18	**M10**	**50**	13.5	6.5	31.0	6.5	3	45	62	1.9	142	24410.1483
18	**M10**	**63**	13.5	6.5	31.0	6.5	3	45	62	1.9	147	24410.1493
with brass thrust pin – picture 1, black												
14	**M 6**	**16**	10.0	3.5	24.5	4.0	3	35	45	1.3	40	24410.1144
14	**M 6**	**20**	10.0	3.5	24.5	4.0	3	35	45	1.3	37	24410.1154
14	**M 6**	**25**	10.0	3.5	24.5	4.0	3	35	45	1.3	44	24410.1164
14	**M 6**	**32**	10.0	3.5	24.5	4.0	3	35	45	1.3	45	24410.1174
14	**M 6**	**40**	10.0	3.5	24.5	4.0	3	35	45	1.3	40	24410.1184
14	**M 6**	**50**	10.0	3.5	24.5	4.0	3	35	45	1.3	42	24410.1194
18	**M 8**	**20**	13.5	5.0	31.0	6.5	3	45	62	1.3	83	24410.1344
18	**M 8**	**25**	13.5	5.0	31.0	6.5	3	45	62	1.3	50	24410.1354
18	**M 8**	**32**	13.5	5.0	31.0	6.5	3	45	62	1.3	78	24410.1364
18	**M 8**	**40**	13.5	5.0	31.0	6.5	3	45	62	1.3	80	24410.1374
18	**M 8**	**50**	13.5	5.0	31.0	6.5	3	45	62	1.3	100	24410.1384
18	**M 8**	**63**	13.5	5.0	31.0	6.5	3	45	62	1.3	88	24410.1394
18	**M10**	**20**	13.5	6.5	31.0	6.5	3	45	62	1.9	127	24410.1444
18	**M10**	**25**	13.5	6.5	31.0	6.5	3	45	62	1.9	129	24410.1454
18	**M10**	**32**	13.5	6.5	31.0	6.5	3	45	62	1.9	133	24410.1464
18	**M10**	**40**	13.5	6.5	31.0	6.5	3	45	62	1.9	137	24410.1474
18	**M10**	**50**	13.5	6.5	31.0	6.5	3	45	62	1.9	80	24410.1484
18	**M10**	**63**	13.5	6.5	31.0	6.5	3	45	62	1.9	147	24410.1494
with thrust pin – picture 2, orange												
14	**M 6**	**16**	10.0	4.0	24.5	4.0	3	35	45	1.8	39	24410.2141
14	**M 6**	**20**	10.0	4.0	24.5	4.0	3	35	45	1.8	43	24410.2151
14	**M 6**	**25**	10.0	4.0	24.5	4.0	3	35	45	1.8	41	24410.2161
14	**M 6**	**32**	10.0	4.0	24.5	4.0	3	35	45	1.8	40	24410.2171
14	**M 6**	**40**	10.0	4.0	24.5	4.0	3	35	45	1.8	43	24410.2181
14	**M 6**	**50**	10.0	4.0	24.5	4.0	3	35	45	1.8	45	24410.2191
18	**M 8**	**20**	13.5	6.0	31.0	6.5	3	45	62	1.8	78	24410.2341
18	**M 8**	**25**	13.5	6.0	31.0	6.5	3	45	62	1.8	85	24410.2351
18	**M 8**	**32**	13.5	6.0	31.0	6.5	3	45	62	1.8	87	24410.2361
18	**M 8**	**40**	13.5	6.0	31.0	6.5	3	45	62	1.8	88	24410.2371
18	**M 8**	**50**	13.5	6.0	31.0	6.5	3	45	62	1.8	86	24410.2381
18	**M 8**	**63**	13.5	6.0	31.0	6.5	3	45	62	1.8	91	24410.2391
18	**M10**	**20**	13.5	8.0	31.0	6.5	3	45	62	3.5	80	24410.2441
18	**M10**	**25**	13.5	8.0	31.0	6.5	3	45	62	3.5	100	24410.2451
18	**M10**	**32**	13.5	8.0	31.0	6.5	3	45	62	3.5	136	24410.2461
18	**M10**	**40**	13.5	8.0	31.0	6.5	3	45	62	3.5	95	24410.2471
18	**M10**	**50**	13.5	8.0	31.0	6.5	3	45	62	3.5	145	24410.2481
18	**M10**	**63**	13.5	8.0	31.0	6.5	3	45	62	3.5	150	24410.2491

chanhvinh.com

Dimensions [mm]											[g]	Art. No.
d_1	d_2	l_1	d_3	d_4	h_1	h_2	h_3	h_4	l_2	l_3		
with thrust pin – picture 2, silver												
14	M 6	16	10.0	4.0	24.5	4.0	3	35	45	1.8	39	24410.2143
14	M 6	20	10.0	4.0	24.5	4.0	3	35	45	1.8	40	24410.2153
14	M 6	25	10.0	4.0	24.5	4.0	3	35	45	1.8	43	24410.2163
14	M 6	32	10.0	4.0	24.5	4.0	3	35	45	1.8	42	24410.2173
14	M 6	40	10.0	4.0	24.5	4.0	3	35	45	1.8	60	24410.2183
14	M 6	50	10.0	4.0	24.5	4.0	3	35	45	1.8	45	24410.2193
18	M 8	20	13.5	6.0	31.0	6.5	3	45	62	1.8	78	24410.2343
18	M 8	25	13.5	6.0	31.0	6.5	3	45	62	1.8	79	24410.2353
18	M 8	32	13.5	6.0	31.0	6.5	3	45	62	1.8	81	24410.2363
18	M 8	40	13.5	6.0	31.0	6.5	3	45	62	1.8	83	24410.2373
18	M 8	50	13.5	6.0	31.0	6.5	3	45	62	1.8	86	24410.2383
18	M 8	63	13.5	6.0	31.0	6.5	3	45	62	1.8	91	24410.2393
18	M10	20	13.5	8.0	31.0	6.5	3	45	62	3.5	80	24410.2443
18	M10	25	13.5	8.0	31.0	6.5	3	45	62	3.5	132	24410.2453
18	M10	32	13.5	8.0	31.0	6.5	3	45	62	3.5	136	24410.2463
18	M10	40	13.5	8.0	31.0	6.5	3	45	62	3.5	140	24410.2473
18	M10	50	13.5	8.0	31.0	6.5	3	45	62	3.5	145	24410.2483
18	M10	63	13.5	8.0	31.0	6.5	3	45	62	3.5	150	24410.2493
with thrust pin – picture 2, black												
14	M 6	16	10.0	4.0	24.5	4.0	3	35	45	1.8	39	24410.2144
14	M 6	20	10.0	4.0	24.5	4.0	3	35	45	1.8	40	24410.2154
14	M 6	25	10.0	4.0	24.5	4.0	3	35	45	1.8	41	24410.2164
14	M 6	32	10.0	4.0	24.5	4.0	3	35	45	1.8	41	24410.2174
14	M 6	40	10.0	4.0	24.5	4.0	3	35	45	1.8	43	24410.2184
14	M 6	50	10.0	4.0	24.5	4.0	3	35	45	1.8	45	24410.2194
18	M 8	20	13.5	6.0	31.0	6.5	3	45	62	1.8	85	24410.2344
18	M 8	25	13.5	6.0	31.0	6.5	3	45	62	1.8	79	24410.2354
18	M 8	32	13.5	6.0	31.0	6.5	3	45	62	1.8	81	24410.2364
18	M 8	40	13.5	6.0	31.0	6.5	3	45	62	1.8	83	24410.2374
18	M 8	50	13.5	6.0	31.0	6.5	3	45	62	1.8	86	24410.2384
18	M 8	63	13.5	6.0	31.0	6.5	3	45	62	1.8	91	24410.2394
18	M10	20	13.5	8.0	31.0	6.5	3	45	62	3.5	80	24410.2444
18	M10	25	13.5	8.0	31.0	6.5	3	45	62	3.5	132	24410.2454
18	M10	32	13.5	8.0	31.0	6.5	3	45	62	3.5	136	24410.2464
18	M10	40	13.5	8.0	31.0	6.5	3	45	62	3.5	140	24410.2474
18	M10	50	13.5	8.0	31.0	6.5	3	45	62	3.5	145	24410.2484
18	M10	63	13.5	8.0	31.0	6.5	3	45	62	3.5	150	24410.2494
ball-headed – picture 3, orange												
14	M 6	16	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	35	24410.3141
14	M 6	20	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	36	24410.3151
14	M 6	25	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	37	24410.3161
14	M 6	32	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	38	24410.3171
14	M 6	40	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	39	24410.3181
14	M 6	50	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	40	24410.3191
18	M 8	20	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	74	24410.3341
18	M 8	25	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	75	24410.3351
18	M 8	32	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	77	24410.3361
18	M 8	40	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	90	24410.3371
18	M 8	50	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	92	24410.3381
18	M 8	63	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	87	24410.3391
18	M10	20	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	126	24410.3441
18	M10	25	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	128	24410.3451
18	M10	32	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	132	24410.3461
18	M10	40	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	136	24410.3471
18	M10	50	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	141	24410.3481
18	M10	63	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	146	24410.3491
ball-headed – picture 3, silver												
14	M 6	16	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	35	24410.3143
14	M 6	20	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	36	24410.3153
14	M 6	25	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	37	24410.3163
14	M 6	32	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	38	24410.3173

chanhvinh.com

Dimensions												Art. No.
d_1	d_2	l_1	d_3	d_4	h_1	h_2	h_3	h_4	l_2	l_3	[g]	
				[mm]								
14	**M 6**	**40**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	39	24410.3183
14	**M 6**	**50**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	41	24410.3193
18	**M 8**	**20**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	74	24410.3343
18	**M 8**	**25**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	75	24410.3353
18	**M 8**	**32**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	77	24410.3363
18	**M 8**	**40**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	90	24410.3373
18	**M 8**	**50**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	82	24410.3383
18	**M 8**	**63**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	87	24410.3393
18	**M10**	**20**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	126	24410.3443
18	**M10**	**25**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	128	24410.3453
18	**M10**	**32**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	132	24410.3463
18	**M10**	**40**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	136	24410.3473
18	**M10**	**50**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	141	24410.3483
18	**M10**	**63**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	146	24410.3493
ball-headed – picture 3, black												
14	**M 6**	**16**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	35	24410.3144
14	**M 6**	**20**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	36	24410.3154
14	**M 6**	**25**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	37	24410.3164
14	**M 6**	**32**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	38	24410.3174
14	**M 6**	**40**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	39	24410.3184
14	**M 6**	**50**	10.0	4.5+0.05	24.5	4.0	3	35	45	3.6	41	24410.3194
18	**M 8**	**20**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	74	24410.3344
18	**M 8**	**25**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	75	24410.3354
18	**M 8**	**32**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	77	24410.3364
18	**M 8**	**40**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	90	24410.3374
18	**M 8**	**50**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	87	24410.3384
18	**M 8**	**63**	13.5	6.1+0.05	31.0	6.5	3	45	62	3.6	87	24410.3394
18	**M10**	**20**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	126	24410.3444
18	**M10**	**25**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	128	24410.3454
18	**M10**	**32**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	132	24410.3464
18	**M10**	**40**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	136	24410.3474
18	**M10**	**50**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	141	24410.3484
18	**M10**	**63**	13.5	7.8+0.05	31.0	6.5	3	45	62	4.3	146	24410.3494

Compliance

For detailed compliance information please select the desired article number.