chanhvinh.com

Adjustable Tension Levers

EH 24440.



Product Description

Material

Lever
- Steel, blackened
- Stainless steel 1.4305, dull blasted

Inner parts
- Steel, blackened, quality 5.8
- Stainless steel 1.4305, dull blasted

Screw
- Steel, blackened, quality 5.8
- Stainless steel 1.4305

Ball knob
- Thermosetting plastic PF 31, black, DIN 319

Operation


By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.


More information

Notes


The threaded portion can be exchanged.

Drawing

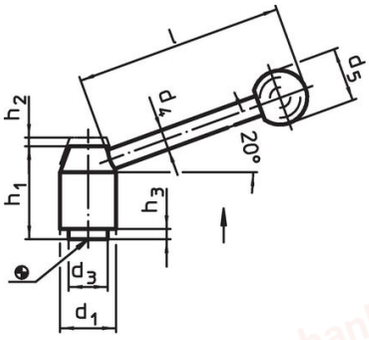



picture 1



picture 2

Order information

Dimensions												Art. No.
d_1	d_2	l_1	d_3	d_4	d_5	h_1	h_2	h_3	l ~	t min.	[g]	
					[mm]							
with female thread – picture 1, Steel												
21	**M 6**	–	13.5	8	20	33.5	4.0	1.0	70	11	91	24440.0101
21	**M 8**	–	13.5	8	20	33.5	4.0	1.0	70	11	91	24440.0102
24	**M 8**	–	16.0	10	25	40.0	4.5	2.5	96	14	159	24440.0201
24	**M10**	–	16.0	10	25	40.0	4.5	2.5	96	14	153	24440.0202
28	**M10**	–	19.0	12	30	48.5	4.5	4.5	110	17	255	24440.0301
28	**M12**	–	19.0	12	30	48.5	4.5	4.5	110	17	249	24440.0302
33	**M12**	–	23.0	12	32	55.0	5.5	6.0	124	23	365	24440.0401
33	**M16**	–	23.0	12	32	55.0	5.5	6.0	124	23	347	24440.0402
40	**M16**	–	30.0	14	35	68.0	5.5	6.0	138	36	622	24440.0501
40	**M20**	–	30.0	14	35	68.0	5.5	6.0	138	36	596	24440.0502
with screw – picture 2, Steel												
21	**M 8**	**12**	13.5	8	20	33.5	4.0	1.0	70	–	98	24440.0120
21	**M 8**	**16**	13.5	8	20	33.5	4.0	1.0	70	–	99	24440.0122
21	**M 8**	**20**	13.5	8	20	33.5	4.0	1.0	70	–	103	24440.0124
21	**M 8**	**25**	13.5	8	20	33.5	4.0	1.0	70	–	65	24440.0126
21	**M 8**	**32**	13.5	8	20	33.5	4.0	1.0	70	–	105	24440.0128
21	**M 8**	**40**	13.5	8	20	33.5	4.0	1.0	70	–	112	24440.0130
21	**M 8**	**50**	13.5	8	20	33.5	4.0	1.0	70	–	109	24440.0132
21	**M 8**	**63**	13.5	8	20	33.5	4.0	1.0	70	–	114	24440.0134
24	**M10**	**16**	16.0	10	25	40.0	4.5	2.5	96	–	172	24440.0220
24	**M10**	**20**	16.0	10	25	40.0	4.5	2.5	96	–	173	24440.0222
24	**M10**	**25**	16.0	10	25	40.0	4.5	2.5	96	–	174	24440.0224
24	**M10**	**32**	16.0	10	25	40.0	4.5	2.5	96	–	180	24440.0226

chanhvinh.com

Dimensions												Art. No.
d_1	d_2	l_1	d_3	d_4	d_5	h_1	h_2	h_3	l ~	t min.		
[mm]											[g]	
24	**M10**	**40**	16.0	10	25	40.0	4.5	2.5	96	–	184	24440.0228
24	**M10**	**50**	16.0	10	25	40.0	4.5	2.5	96	–	185	24440.0230
24	**M10**	**63**	16.0	10	25	40.0	4.5	2.5	96	–	195	24440.0232
24	**M10**	**80**	16.0	10	25	40.0	4.5	2.5	96	–	205	24440.0234
28	**M12**	**16**	19.0	12	30	48.5	4.5	4.5	110	–	277	24440.0318
28	**M12**	**20**	19.0	12	30	48.5	4.5	4.5	110	–	282	24440.0320
28	**M12**	**25**	19.0	12	30	48.5	4.5	4.5	110	–	283	24440.0322
28	**M12**	**32**	19.0	12	30	48.5	4.5	4.5	110	–	287	24440.0324
28	**M12**	**40**	19.0	12	30	48.5	4.5	4.5	110	–	298	24440.0326
28	**M12**	**50**	19.0	12	30	48.5	4.5	4.5	110	–	302	24440.0328
28	**M12**	**63**	19.0	12	30	48.5	4.5	4.5	110	–	312	24440.0330
28	**M12**	**80**	19.0	12	30	48.5	4.5	4.5	110	–	320	24440.0332
33	**M16**	**32**	23.0	12	32	55.0	5.5	6.0	124	–	422	24440.0422
33	**M16**	**40**	23.0	12	32	55.0	5.5	6.0	124	–	435	24440.0424
33	**M16**	**50**	23.0	12	32	55.0	5.5	6.0	124	–	446	24440.0426
33	**M16**	**63**	23.0	12	32	55.0	5.5	6.0	124	–	461	24440.0428
33	**M16**	**80**	23.0	12	32	55.0	5.5	6.0	124	–	486	24440.0430
40	**M20**	**40**	30.0	14	35	68.0	5.5	6.0	138	–	772	24440.0520
40	**M20**	**50**	30.0	14	35	68.0	5.5	6.0	138	–	792	24440.0522
40	**M20**	**63**	30.0	14	35	68.0	5.5	6.0	138	–	826	24440.0524
40	**M20**	**80**	30.0	14	35	68.0	5.5	6.0	138	–	859	24440.0526
with female thread – picture 1, Stainless steel												
21	**M 6**	**–**	13.5	8	20	33.5	4.0	1.0	70	11	93	24440.0601
21	**M 8**	**–**	13.5	8	20	33.5	4.0	1.0	70	11	90	24440.0602
24	**M 8**	**–**	16.0	10	25	40.0	4.5	2.5	96	14	159	24440.0611
24	**M10**	**–**	16.0	10	25	40.0	4.5	2.5	96	14	153	24440.0612
28	**M10**	**–**	19.0	12	30	48.5	4.5	4.5	110	17	253	24440.0621
28	**M12**	**–**	19.0	12	30	48.5	4.5	4.5	110	17	249	24440.0622
with screw – picture 2, Stainless steel												
21	**M 8**	**16**	13.5	8	20	33.5	4.0	1.0	70	–	99	24440.0702
21	**M 8**	**20**	13.5	8	20	33.5	4.0	1.0	70	–	101	24440.0704
21	**M 8**	**25**	13.5	8	20	33.5	4.0	1.0	70	–	103	24440.0706
21	**M 8**	**32**	13.5	8	20	33.5	4.0	1.0	70	–	104	24440.0708
21	**M 8**	**40**	13.5	8	20	33.5	4.0	1.0	70	–	106	24440.0710
21	**M 8**	**50**	13.5	8	20	33.5	4.0	1.0	70	–	110	24440.0712
21	**M 8**	**63**	13.5	8	20	33.5	4.0	1.0	70	–	114	24440.0714
24	**M10**	**20**	16.0	10	25	40.0	4.5	2.5	96	–	170	24440.0722
24	**M10**	**25**	16.0	10	25	40.0	4.5	2.5	96	–	172	24440.0724
24	**M10**	**32**	16.0	10	25	40.0	4.5	2.5	96	–	177	24440.0726
24	**M10**	**40**	16.0	10	25	40.0	4.5	2.5	96	–	180	24440.0728
24	**M10**	**50**	16.0	10	25	40.0	4.5	2.5	96	–	185	24440.0730
24	**M10**	**63**	16.0	10	25	40.0	4.5	2.5	96	–	192	24440.0732
24	**M10**	**80**	16.0	10	25	40.0	4.5	2.5	96	–	204	24440.0734
28	**M12**	**25**	19.0	12	30	48.5	4.5	4.5	110	–	281	24440.0742
28	**M12**	**32**	19.0	12	30	48.5	4.5	4.5	110	–	288	24440.0744
28	**M12**	**40**	19.0	12	30	48.5	4.5	4.5	110	–	292	24440.0746
28	**M12**	**50**	19.0	12	30	48.5	4.5	4.5	110	–	299	24440.0748
28	**M12**	**63**	19.0	12	30	48.5	4.5	4.5	110	–	309	24440.0750
28	**M12**	**80**	19.0	12	30	48.5	4.5	4.5	110	–	325	24440.0752

Compliance

For detailed compliance information please select the desired article number.