chanhvinh.com

Adjustable Flat Tension Levers • Stainless steel

EH 24441.



Product Description

Adjustable flat tension levers are used when the swivel range is limited or a specific lever position is required.
Adjustable flat tension levers are characterised by their low construction height and are particularly suitable for use in restricted spaces or when the lever should not overhang..

Material

Lever
- Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure
- Zinc die-cast, plastic coated, silver, similar to RAL 9006, matt structure


Inner parts
- Stainless steel 1.4305


Covering
- Plastic, black
- Plastic, light grey

Operation


By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

Drawing

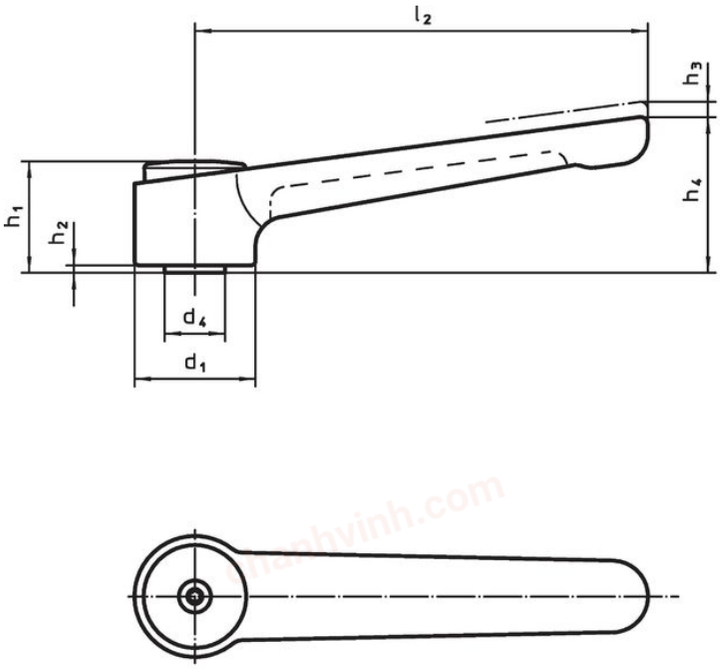

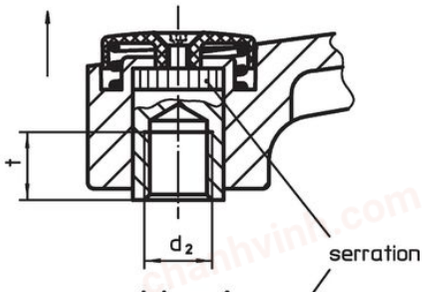

picture 1

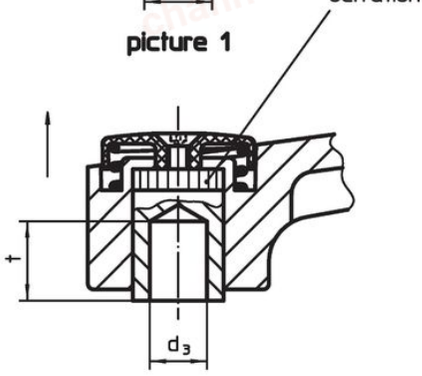

picture 2

Order information

Dimensions												Art. No.
d_1	d_2	d_3 H7	d_4	h_1	h_2	h_3	h_4	l_2	t min.	min.	max.	
[mm]										[°C]		[g]	
with female thread – picture 1, black													
32	**M 8**	–	16	29.5	2	2.5	41.5	120	14	-30	80	192	24441.0205
32	**M10**	–	16	29.5	2	2.5	41.5	120	14	-30	80	183	24441.0210
32	**M12**	–	16	29.5	2	2.5	41.5	120	14	-30	80	976	24441.0215
40	**M12**	–	23	42.0	4	4.0	56.0	145	22	-30	80	403	24441.0220
40	**M16**	–	23	42.0	4	4.0	56.0	145	22	-30	80	381	24441.0225

chanhvinh.com

Dimensions												Art. No.
d_1	d_2	d_3 H7	d_4	h_1	h_2	h_3	h_4	l_2	t min.	min.	max.	
[mm]										[°C]		[g]	
with female thread – picture 1, silver													
32	**M 8**	**–**	16	29.5	2	2.5	41.5	120	14	-30	80	190	24441.0305
32	**M10**	**–**	16	29.5	2	2.5	41.5	120	14	-30	80	184	24441.0310
32	**M12**	**–**	16	29.5	2	2.5	41.5	120	14	-30	80	178	24441.0315
40	**M12**	**–**	23	42.0	4	4.0	56.0	145	22	-30	80	399	24441.0320
40	**M16**	**–**	23	42.0	4	4.0	56.0	145	22	-30	80	380	24441.0325
with smooth bore – picture 2, black													
32	**–**	**8**	16	29.5	2	2.5	41.5	120	14	-30	80	188	24441.0250
32	**–**	**10**	16	29.5	2	2.5	41.5	120	14	-30	80	181	24441.0255
40	**–**	**12**	23	42.0	4	4.0	56.0	145	22	-30	80	395	24441.0260
40	**–**	**16**	23	42.0	4	4.0	56.0	145	22	-30	80	380	24441.0265
with smooth bore – picture 2, silver													
32	**–**	**8**	16	29.5	2	2.5	41.5	120	14	-30	80	186	24441.0350
32	**–**	**10**	16	29.5	2	2.5	41.5	120	14	-30	80	181	24441.0355
40	**–**	**12**	23	42.0	4	4.0	56.0	145	22	-30	80	396	24441.0360
40	**–**	**16**	23	42.0	4	4.0	56.0	145	22	-30	80	375	24441.0365

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.