chanhvinh.com

High Knurled Nuts · DIN 466

EH 24780.



Product Description

Knurled nuts are very versatile. Three material versions for the different requirements
- Steel, blackened
- Steel, zinc-plated by galvanization
- Stainless steel

are available.
Knurled nuts can be easily tightened and released by hand. The ribbed outer surface of the nut prevents slipping when tightening / releasing with the fingers.
The high knurled nuts are manufactured according to DIN 467.

Material

- Steel, blackened, quality 5
- Steel, zinc-plated by galvanization, quality 5
- Stainless steel 1.4305, dull blasted

More information


Notes

Knurling pitch and knurling depth may differ from DIN.

Further products

- Flat Knurled Nuts, DIN 467

Drawing



Order information

d1	d2	d3	h	k		Art. No.
		Dimensions [mm]			[g]	
Steel, blackened						
M 3	12	6	7.5	2.5	2.9	24780.0030
M 4	16	8	9.5	3.5	6.7	24780.0040
M 5	20	10	11.5	4.0	12.0	24780.0050
M 6	24	12	15.0	5.0	23.0	24780.0060
M 8	30	16	18.0	6.0	44.0	24780.0080
M10	36	20	23.0	8.0	85.0	24780.0100
M12	40	22	25.0	10.0	119.0	24780.0120[1)]
Steel, zinc-plated by galvanization						
M 3	12	6	7.5	2.5	3.0	24780.0330
M 4	16	8	9.5	3.5	6.7	24780.0340
M 5	20	10	11.5	4.0	12.0	24780.0350
M 6	24	12	15.0	5.0	22.0	24780.0360
M 8	30	16	18.0	6.0	44.0	24780.0380
M10	36	20	23.0	8.0	85.0	24780.0400
M12	40	22	25.0	10.0	119.0	24780.0412[1)]


[1)] DIN standards do not include these dimensions.

chanhvinh.com

Dimensions						Art. No.
d_1	d_2	d_3	h	k	[g]	
[mm]						
Stainless steel 1.4305						
M 4	16	8	9.5	3.5	6.7	24780.0240
M 5	20	10	11.5	4.0	12.0	24780.0250
M 6	24	12	15.0	5.0	23.0	24780.0260
M 8	30	16	18.0	6.0	44.0	24780.0280
M10	36	20	23.0	8.0	83.0	24780.0300

[1] DIN standards do not include these dimensions.

Application example

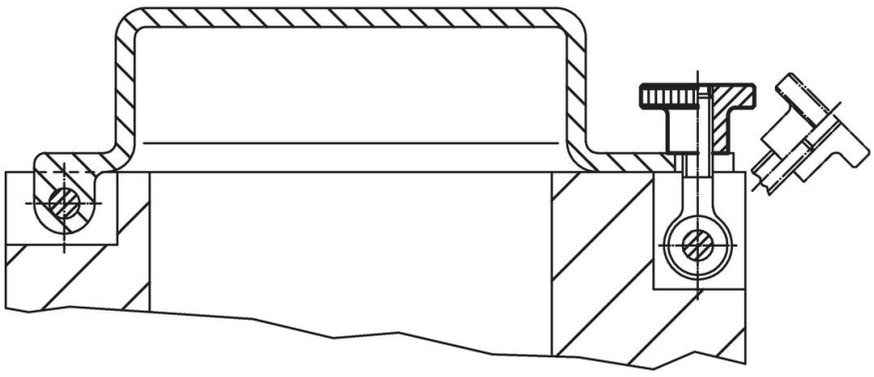

Compliance

For detailed compliance information please select the desired article number.