chanhvinh.com

Rubber Endstop Buffers • cylindrical, front mounting

EH 25150.



Product Description


To be used as an elastic end-stop, bearing foot etc.
The hardness is 55 ±5° Shore A. Further shore hardnesses (40 ±5° Shore A and 70 ±5° Shore A) on request.

Material

Support washer
- Stainless steel 1.4301

Body
- NBR

Drawing

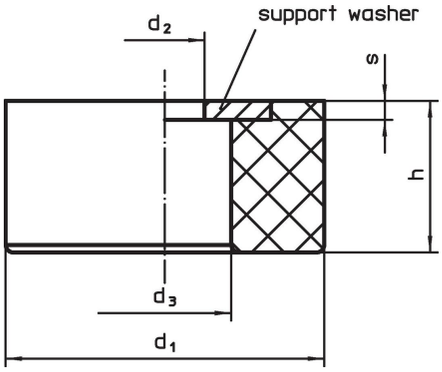

Order information

Dimensions					Spring rate R ~	Load capacity max.	Spring range ~				Art. No.
d_1	h	d_2	d_3	s				min.	max.		
[mm]					[N/mm]	[N]	[mm]	[°C]		[g]	
16	**8**	**4.3**	8.0	1.0	140	280	2.0	-30	120	1.9	25150.1516
20	**10**	**5.3**	9.5	1.2	148	370	2.5	-30	120	3.8	25150.1520
25	**12**	**6.4**	11.0	1.6	210	630	3.0	-30	120	7.4	25150.1525
35	**16**	**8.4**	14.0	2.0	345	1380	4.0	-30	120	19.0	25150.1535
42	**20**	**8.4**	17.5	2.0	360	1800	5.0	-30	120	31.0	25150.1542
42	**20**	**10.5**	17.5	2.5	360	1800	5.0	-30	120	37.0	25150.1543
56	**24**	**8.4**	19.5	2.0	577	3460	6.0	-30	120	63.0	25150.1556
56	**24**	**13.0**	19.5	3.0	577	3460	6.0	-30	120	79.0	25150.1557

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.