
chanhvinh.com

Hinges • Zinc die-cast, with indexing positions
EH 25164.

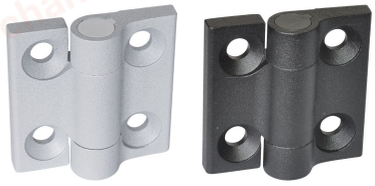

Product Description

Hinges from zinc die-cast with indexing positions hold door and covers in fixed positions. It avoids undesired automatic closing or opening. This is an advantage for example when filling machines and facilities or during maintenance and repairs.
The version with the indexing positions -3° and 117° (picture 2) also ensures that the door or cover presses slightly against the housing frame by the -3° when closed.
These hinges from zinc die-cast are characterised by their simple and timeless design.

Material

Body
- Zinc die-cast, plastic coated, silver, similar to RAL 9006, matt structure
- Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure

Axis
- Stainless steel 1.4305


Spring
- Spring steel wire

More information

Further products

- Spacer Plates, for hinges
- Threaded Plates, for hinges

Drawing

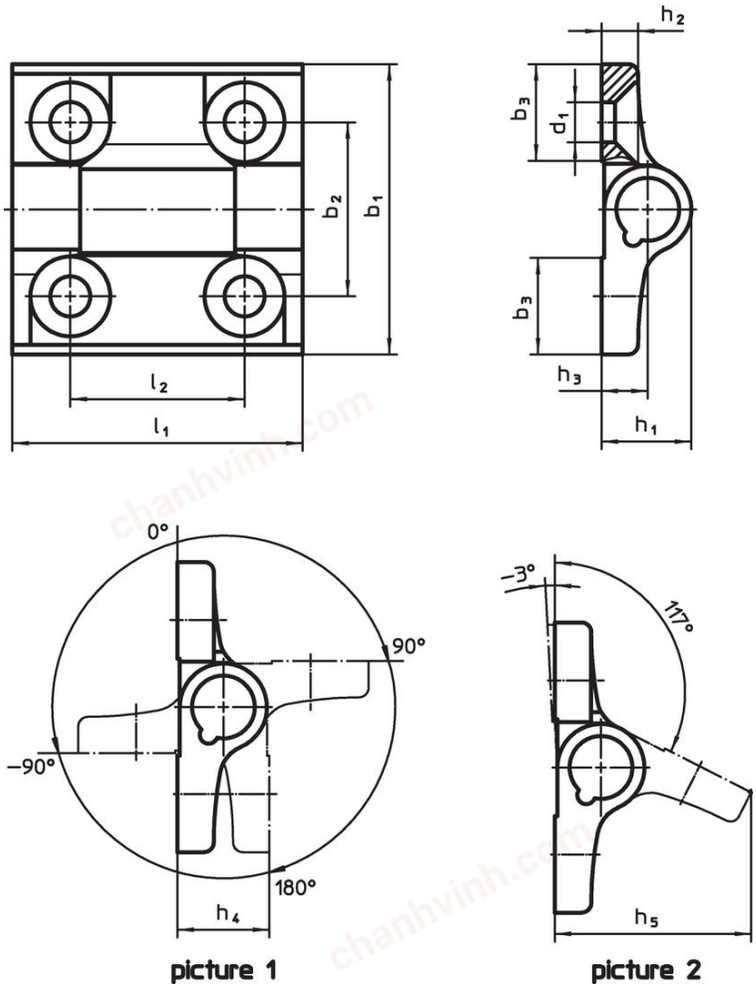

picture 1 picture 2

chanhvinh.com

Order information

Dimensions											Holding force					Art. No.
b_1	l_1	b_2	b_3	d_1	h_1	h_2	h_3	h_4	h_5	l_2	F_1	F_2	F_3	max.		
[mm]											[N]			[°C]	[g]	
indexing positions -90°, 0°, 90° and 180° – picture 1, Zinc die-cast, silver																
60	**60**	36	20	8.3	18.5	7.5	9.5	19	40.5	36	1700	2800	2300	80	152	25164.0005
indexing positions -90°, 0°, 90° and 180° – picture 1, Zinc die-cast, black																
60	**60**	36	20	8.3	18.5	7.5	9.5	19	40.5	36	1700	2800	2300	80	156	25164.0105
indexing positions -3° and 117° – picture 2, Zinc die-cast, silver																
60	**60**	36	20	8.3	18.5	7.5	9.5	19	40.5	36	1700	2800	2300	80	152	25164.0010
indexing positions -3° and 117° – picture 2, Zinc die-cast, black																
60	**60**	36	20	8.3	18.5	7.5	9.5	19	40.5	36	1700	2800	2300	80	153	25164.0110

Compliance

For detailed compliance information please select the desired article number.