


chanhvinh.com

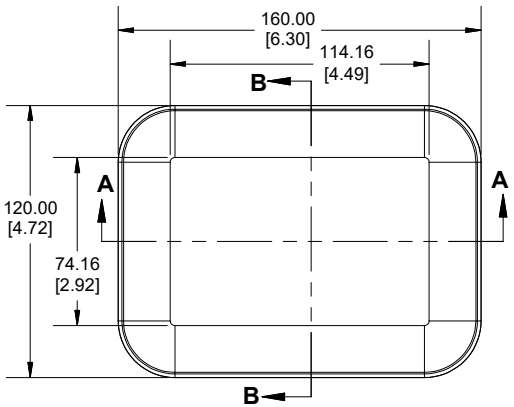


TOP VIEW

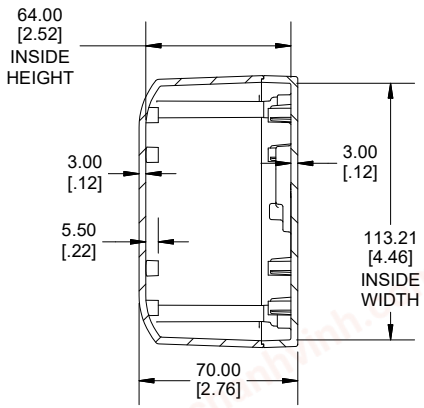


SECTION B-B
END VIEW




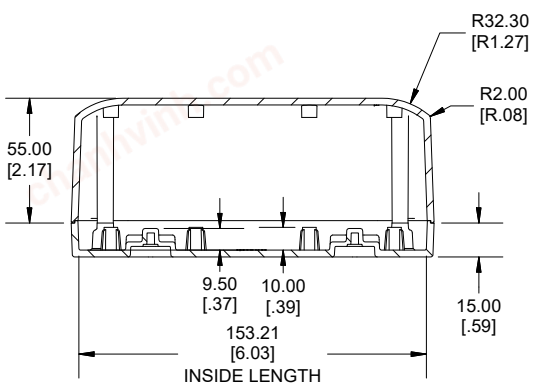


SECTION A-A
SIDE VIEW

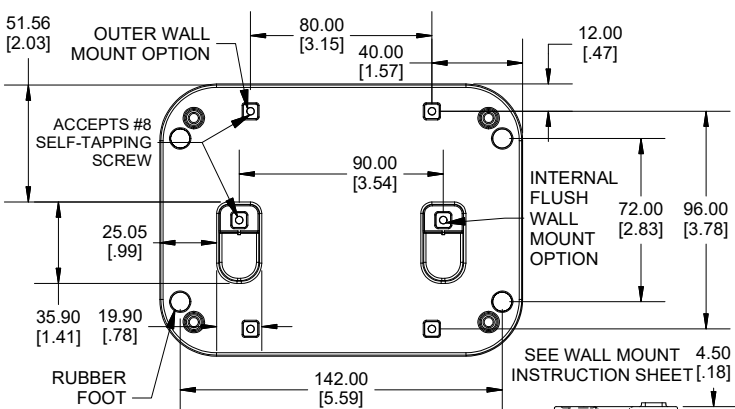


WALL MOUNT FOOT VIEW



WALL MOUNT
FOOT

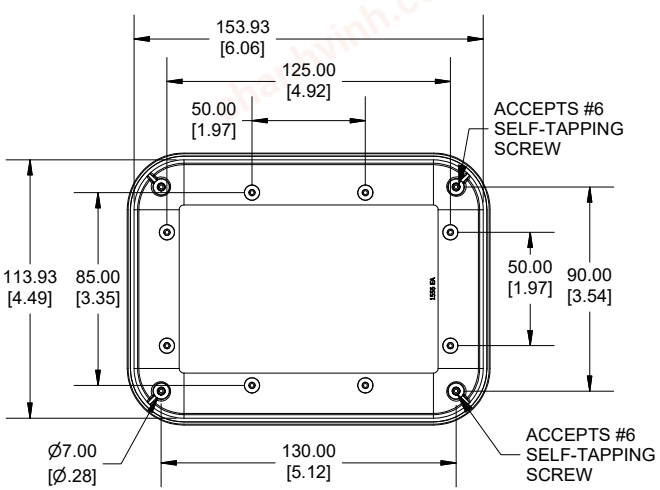

INSIDE LID

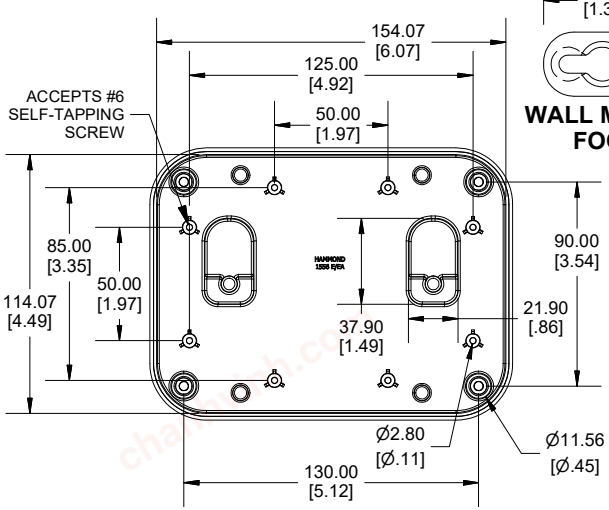

INSIDE BOX

Dimensions:
mm
[inches]

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change, we do not recommend using them as a locating reference for modification purposes)

NOTE
Purchased assembly includes box, lid, 4 cover screws and 4 rubber feet. Molded from FRABS (UL94-V0) plastic
Recommended Cover Screw Torque - 71-85 ozf-in (50-60 cN-m)
Recommended PCB Screw Torque - 42-56 ozf-in (30-40 cN-m)

1556		
1556EA Enclosure		
Flame Retardant ABS Black Enclosure		1556EABK
Flame Retardant ABS Grey Enclosure		1556EAGY
Flame Retardant ABS White Enclosure		1556EAWH
ACCESSORIES		
Clear Rubber Feet (Pkg 24)		1421T6CL
Steel Cover Screws [#6 X 1/2" Self Tapping] (Pkg 50)		SC527-50
Steel P.C.Board Screw [#6 X 1/4" Self Tapping] (Pkg 50)		SC526-50
Stainless Steel Wall Mount foot Screw [#8 X 3/8" Self Tapping] (Pkg 50)		SC556-50
Wall Mount Foot Kit [wall mount foot] (Pkg 4) [#8 X 3/8" Self Tapping] (Pkg 4)	FR ABS Grey	1556FOOTGY-4
	FR ABS Black	1556FOOTBK-4
	FR ABS White	1556FOOTWH-4

HAMMOND MANUFACTURING®
1556EA
www.hammondmfg.com

REV: 20.01.2023