

chanhvinh.com

Connector Location A


Connector Location B

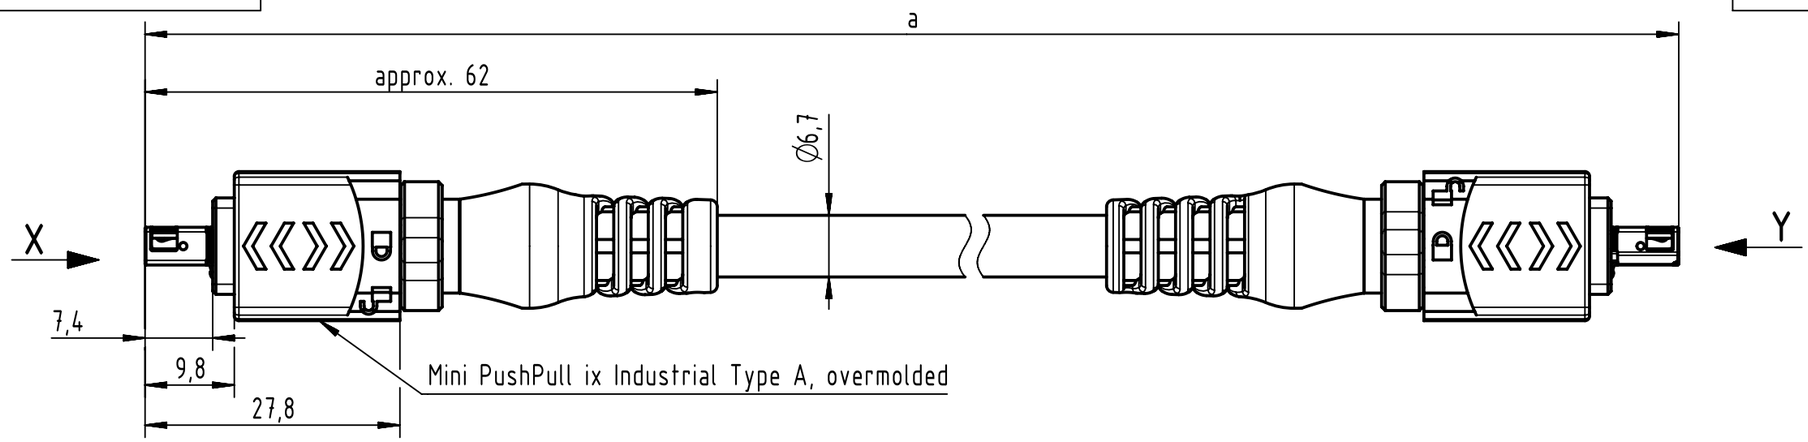

X
male

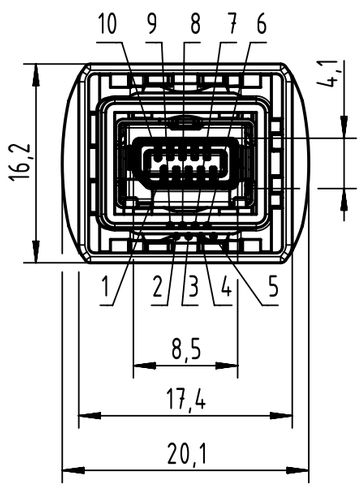



Loading Plan
acc. to TIA/EIA 568B

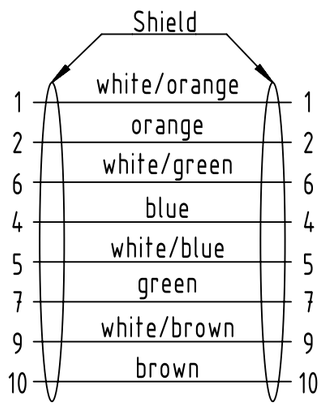

Contacts 3 and 8
are not connected
on both ends

Y
male



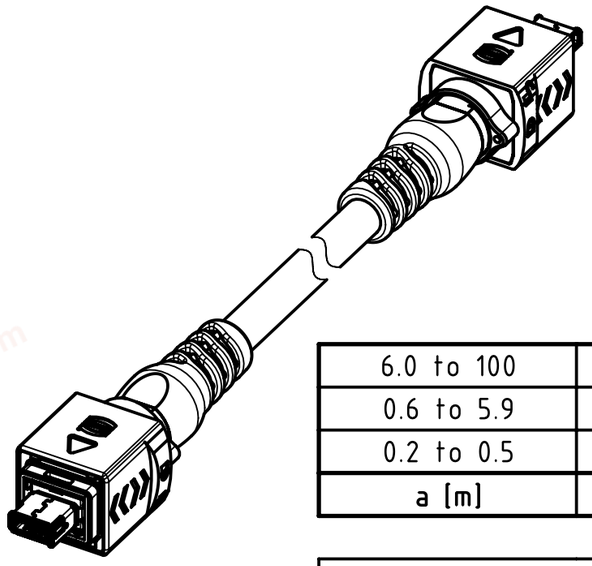

length in "1m" step		
	100	XXX=000
	99	XXX=990
	.	.
	.	.
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	**a [m]**	**XXX**

a [m]	Tolerance
6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02

- Protection level: IP65/67
- Temperature range: -40°C ... +70°C

Type of cable	Part no.
RJI Ethernet Stranded Cable, 4x2xAWG 26/7, PUR, Cat. 6A, yellow	33483434804XXX

NOTE:
For lengths < 1.0m:
- relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°

For lengths ≥ 1.0m:
-relative positioning of the connectors to each other not obligatory

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - RO

HARTING Customised Solutions
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
402990 Costa	COSTEA Costea	402676 Gross	2020-09-04	Final Release

Title: MPP ix Type A Cat.6A PUR

Doc-Key / ECM-Nr.: 100879025/UGD/000/B 500000179257

Type: TB | Number: 33483434804XXX | Rev.: B | Page: 1/1

A3