
chanhvinh.com

HellermannTyton

Technical data sheet

Article number:
156-03581 **S50ROSFT8**

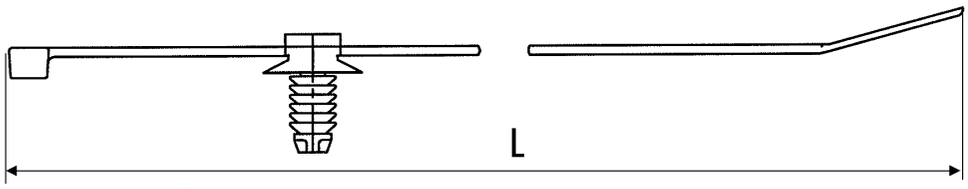

Product Group	2-piece fixing ties with fir tree, with disc, for round holes
Product Family	Fir tree parts FT8
Material	Polypropylene (PP), Polyamide 6.6, heat stabilised (PA66HS)
Colour	Black (BK)

Application Tool	EVO7i
Bundle Diameter max (metric)	45.0 mm
Bundle Ø min.	4.0 mm
Cable Tie	Polypropylene (PP)
Fixation Method	Fir Tree
Foot Part	Polyamide 6.6, heat stabilised (PA66HS)
for Hole Ø (FH)	7.7 - 8.0 mm
Height (H)	1.45 mm
Length (L)	200.00 mm
Min.Tensile Strength	185 N
Mounting Screw Type	Plated through hole
Operating Temperature	-40 °C to +110 °C, (3000 h)
Package Content packed in	bag
Pack Cont.	500 pcs.
Panel Thickness	6.0 mm
Panel Thickness max.	0.8 - 6.0 mm
Panel Thickness min. (metric)	0.8 mm
ROHS compliant	Yes
Thickness (T)	1.45 mm
Variant	Outside Serrated with AntiSlip Engraving
Width (W)	4.90 mm

RoHS

Technical changes and errors reserved. It's up to the customer to check the suitability for a specific application by means of tests.

created on 6. September 2024, 2:00 pm