chanhvinh.com


For mounting to duct fingers

HelaDuct HTWD-NFWR and HTWD-WFWR Wire Retainers

The Narrow Finger and Wide Finger Wire Retainers HTWD-NFWR and HTWD-WFWR are easily attached to HelaDuct wiring duct fingers to hold wires securely in place during installation and when the cover is removed.

Features and benefits


- Prevents wires from falling out even when vertical routed
- Easily inserted onto single fingers of duct
- Height can be freely adjusted
- Does not block insertion of wirings into slots
- One retainer for all duct widths: length of retainer can be shortened at break-off points to duct width
- HTWD-NFWR is compatible with HelaDuct HTWD-PN and HTWD-HF (metric sizes)
- HTWD-WFWR is compatible with HelaDuct HTWD-PW ducts

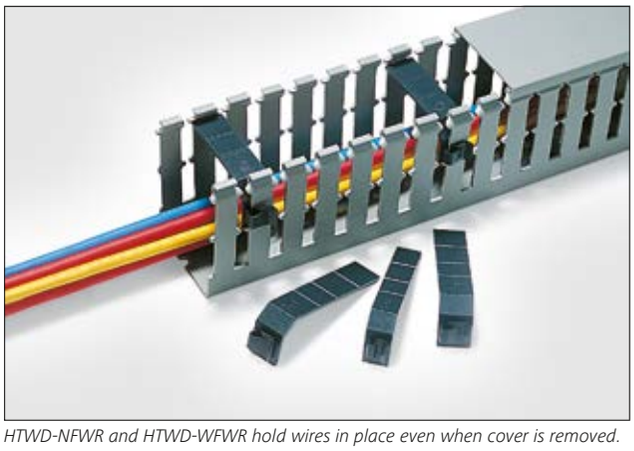

HTWD-NFWR and HTWD-WFWR hold wires in place even when cover is removed.

MATERIAL	Acrylonitrile Butadiene Styrene (ABS)
Operating Temperature	-40 °C to +80 °C
Flammability	UL 94 V0

HF ✓ RoHS ✓

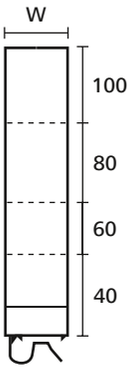

HTWD-NFWR, -WFWR

TYPE	For Wiring Ducts	Width (W)	Colour	Pack Cont.	Article-No.
HTWD-NFWR	HTWD-PN, HTWD-HF	14	Black (BK)	100 pcs.	181-10020
HTWD-WFWR	HTWD-PW	18	Black (BK)	100 pcs.	181-10010

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

Date of issue: December 2021

Add items to your watchlist!
www.HT.click/9-378