chanhvinh.com

Heat shrinkable tubing 3:1 in a kit

ShrinKit 321 Basic - 220 pcs. - black

The compact and handy kit belongs to the basic equipment for every assembler. Its ideal shrink ratio of 3:1 replaces many differently sized tubing.

Features and benefits


- Compact and handy kit
- Black tubing
- Available in a wide size range of 1.5 mm to 18.0 mm
- 220 precut pieces in five sizes



ShrinKit 321 Basic - 220 pcs 3:1 heat shrink assortment.

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	3:1
Operating Temperature	-55 °C to +135 °C
Min. Shrink Temperature	+90 °C
Longitudinal Change After Shrinkage	+5%/-10% max.
Dielectric Strength	20 kV/mm
Flammability	self-extinguishing
Insulation Class	B (VDE 0530)



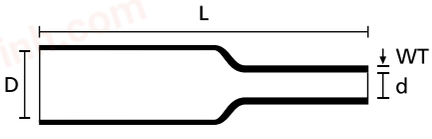

Heat Shrinkable Tubing 3:1

RoHS

COMP.	Supplied Ø D min.	Recov. Ø d max.	Length (L)	Wall (WT)	Colour	Content	Tools	Article-No.
1	1.5	0.5	35.0	0.45	Black (BK)	50 pcs.	30	380-03001
2	6.0	2.0	35.0	0.70	Black (BK)	30 pcs.		
3	3.0	1.0	35.0	0.55	Black (BK)	25 pcs.		
4	6.0	2.0	35.0	0.70	Black (BK)	15 pcs.		
5	6.0	2.0	35.0	0.70	Black (BK)	15 pcs.		
6	3.0	1.0	35.0	0.55	Black (BK)	25 pcs.		
7	1.5	0.5	35.0	0.45	Black (BK)	50 pcs.		
8	12.0	4.0	80.0	0.70	Black (BK)	5 pcs.		
8	18.0	6.0	80.0	0.80	Black (BK)	5 pcs.		

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools	
	30 H6100
	566

For more information on toolings please refer to the Application Tooling chapter.

Date of issue: September 2022

Add items to your watchlist!
www.HT.click/49-216