chanhvinh.com



## EL

### Light Range Junction Boxes with Opaque Lids

Halogen free polystyrene junction boxes with screw down lids in RAL 7035.

**Features and Benefits**

- Includes supports for installation of DIN rail and mounting plates
- IK07



*Junction Box with Opaque lid.*

| TYPE | Height mm | Width mm | Depth mm | IP Rating | Pack Cont. |
|---|---|---|---|---|---|
| **EL111** | 108 | 108 | 64 | IP67 | 1 |
| **EL161** | 162 | 116 | 78 | IP67 | 1 |
| **EL171** | 175 | 151 | 95 | IP67 | 1 |
| **EL231** | 241 | 180 | 95 | IP67 | 1 |
| **EL322** | 328 | 239 | 129 | IP67 | 1 |

**Versions with pre-moulded cable entries or transparent lids available on request**

**Plastic and metal back plates also available on request**

## A

### Adaptable Boxes with Opaque Lids

Plastic halogen free junction boxes with stepped glands and press-fit lids in RAL 7035

**Features and Benefits**

- Double insulated
- IK07
- Range of temperature -15°C to +60°C



*Junction Box with Stepped Glands.*

| TYPE | Height mm | Width mm | Depth mm | Description | IP Rating | Pack Cont. |
|---|---|---|---|---|---|---|
| **A165MM** | 65 | - | 35 | Round | IP44 | 1 |
| **A280MM** | 80 | - | 35 | Round | IP44 | 1 |
| **A3JB** | 80 | 80 | 40 | Square | IP44 | 1 |

chanhvinh.com



## ASH

**Adaptable Junction Boxes with Opaque Lids**

Double insulated adaptable box with smooth walls and screw on lids in RAL 7035

**Features and Benefits**

- Double insulated
- IK08
- Installation temperature -15°C to +60°C



*Junction Box with Opaque lid.*

| TYPE | Height mm | Width mm | Depth mm | IP Rating | Pack Cont. |
|---|---|---|---|---|---|
| **ASH15** | 110 | 110 | 112 | IP55 | 1 |
| **ASH25** | 150 | 110 | 150 | IP55 | 1 |
| **ASH35** | 150 | 150 | 150 | IP55 | 1 |
| **ASH45** | 220 | 150 | 150 | IP55 | 1 |
| **ASH55** | 300 | 220 | 150 | IP55 | 1 |

## AS

**Adaptable Junction Boxes with Opaque Lids**

Plastic junction box with smooth walls and screw on lids in RAL 7035

**Features and Benefits**

- Double insulated
- IK08
- Installation temperature -15°C to +60°C



*Junction Box Opaque lid.*

| TYPE | Height mm | Width mm | Depth mm | IP Rating | Pack Cont. |
|---|---|---|---|---|---|
| **AS05** | 123 | 83 | 62 | IP56 | 1 |
| **AS15** | 103 | 103 | 62 | IP56 | 1 |
| **AS25** | 154 | 113 | 77 | IP56 | 1 |
| **AS35** | 193 | 144 | 79 | IP56 | 1 |
| **AS45** | 242 | 190 | 90 | IP56 | 1 |
| **AS55** | 305 | 225 | 126 | IP56 | 1 |
| **AS65** | 390 | 310 | 128 | IP56 | 1 |

chanhvinh.com



## AS T

**Adaptable Junction Boxes with Transparent Lids**

Plastic adaptable box with smooth walls in RAL 7035 and screw on transparent lids

**Features and Benefits**

- Double insulated
- IK08
- Installation temperature -15°C to +60°C




*Junction Box Transparent Lid.*

| TYPE | Height mm | Width mm | Depth mm | IP Rating | Pack Cont. |
|---|---|---|---|---|---|
| **AS35T** | 190 | 140 | 70 | IP56 | 1 |
| **AS45T** | 240 | 190 | 90 | IP56 | 1 |
| **AS55T** | 300 | 220 | 150 | IP56 | 1 |
| **AS65T** | 380 | 300 | 150 | IP56 | 1 |

## PB

**Metal Mounting Plates for use with AS and ASH Junction Boxes**

Metal mounting plates with cut outs for ease of installation

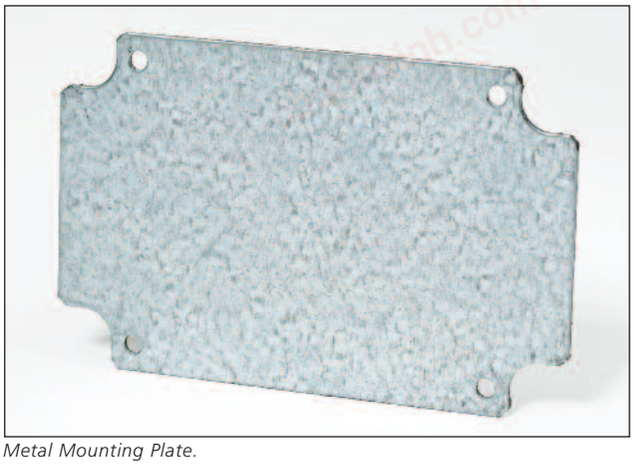

*Metal Mounting Plate.*

| TYPE | For use with | Pack Cont. |
|---|---|---|
| **PB1** | AS35/AS35T | 1 |
| **PB2** | AS45/AS45T | 1 |
| **PB3** | AS55/AS55T | 1 |
| **PB4** | AS65/AS65T | 1 |
| **PB5** | ASH15/ASH15T | 1 |
| **PB6** | ASH25/ASH25T | 1 |
| **PB7** | ASH35/ASH35T | 1 |
| **PB8** | ASH45/ASH45T | 1 |
| **PB9** | ASH55/ASH55T | 1 |