
chanhvinh.com



- **Compact design–lightweight yet strong.**
- Electro-tin plated for low contact resistance and corrosion protection when used with copper conductors.
- Require no special installation tools.
- UL and CSA certified for use with copper and aluminum conductors.
- Ports are marked with catalog description and conductor range.
- DFARS Compliant

Heyco® Aluminum Solderless Connectors

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	PART DIMENSIONS A Width in.	A Width mm.	B Length in.	B Length mm.	C Height in.	C Height mm.	Bolt Size in.	Bolt Size mm.
Single Conductor										
4-14	**1863**	A35	.50	12,7	1.06	26,9	.50	12,7		
2-14	**1864**	A90	.50	12,7	1.16	29,5	.56	14,2	1/4	6,4
1/0-14	**1884**	A125	.63	16,0	1.47	37,3	.79	20,1		
Two Conductors										
2-14	**1864-2**	A90-2	.91	23,0	1.16	29,5	.56	14,2	1/4	6,4
1/0-14	**1884-2**	A125-2	1.22	31,0	1.46	37,1	.79	20,1		

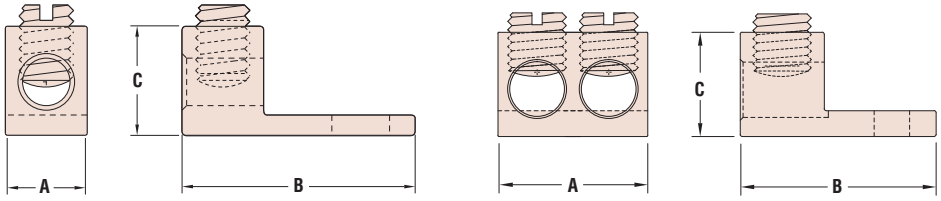




- **100% conductivity for highest efficiency.**
- Completely reuseable.
- Require no special installation tools.
- UL listed and CSA certified for use with copper conductors.
- Marked with catalog description and conductor range.
- DFARS Compliant

Heyco® Copper Lug Connectors

Copper Single Hole Offset Lugs

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	CURRENT RATING AMPS	HEIGHT WITH MAX. WIRE in.	HEIGHT WITH MAX. WIRE mm.	PART DIMENSIONS A Tang Width in.	A Tang Width mm.	B Length in.	B Length mm.	Bolt Size in.	Bolt Size mm.
6-14	**1851**	CB 35	50	3/4	19,1	.38	9,7	1.38	35,1	3/16	4,8

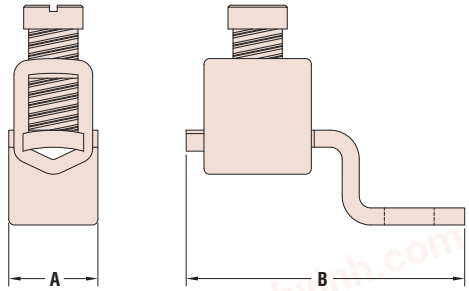

Materials	6061-T6 aluminum alloy; electrolytic copper
Certifications	UL Listed under Underwriters' Laboratories File E80121
	CSA Certified by the Canadian Standards Association File 242954 & 246619
Flammability Rating	94V-0

Quick Specs

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com