chanhvinh.com




Heyco® Armor Bushings


- **Use with Flexible Armored Cable (BX) and Flexible Metallic Conduit (FMC)**, to insulate rough cut conduit ends.
- Chamfered lead-in allows for fast installation.
- Suitable for installation at temperatures up to 194°F (90°C) and as low as -40°F (-40°C).
- Size-marked for easy identification.

WILL FIT THESE ARMORED CABLES (AWG/CONDUCTORS)	PART NO. Red	DESCRIPTION	PART DIMENSIONS A Inside Diameter in.	A Inside Diameter mm.	B Head Diameter in.	B Head Diameter mm.	C Overall Height in.	C Overall Height mm.
14/2, 14/3, 12/2, 12/3	**2264**	AB 0	.37	9,4	.68	17,3	.58	14,7
14/4, 6/1, 4/1	**2265**	AB 1	.44	11,2	.70	17,8	.63	16,0
12/4, 10/2, 10/3, 2/1	**2266**	AB 2	.57	14,0	.85	21,6	.61	15,5
	2281	AB Orange*	.58	14,7	.90	22,9	.50	12,7
10/4, 8/2, 8/3, 1/1	**2267**	AB 3	.73	18,5	1.02	25,9	.70	17,8

Standard color red except as noted.
*This part is not UL or CSA certified.

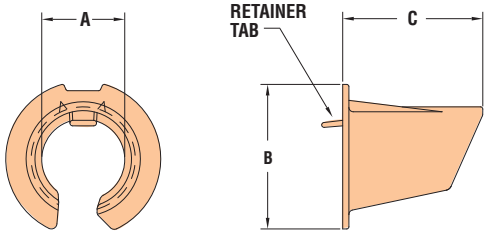

2264/2265

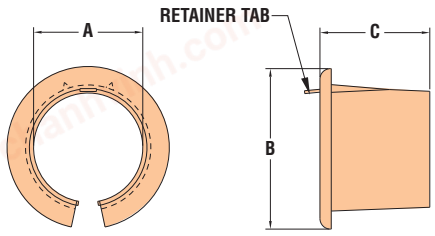

2266/2267

Quick Specs

Material	High Dielectric Polyethylene
Temperature Range	-40°F (-40°C) to 194°F (90°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com