
chanhvinh.com

ALL NEW PRODUCTS!



HEYClip™ Blunt Rivets

- Part Description Key: PR XXX-YYY where XXX = Mounting Hole Diameter (inches) and YYY = minimum Panel Thickness (inches).
- Pre-driven




WILL FIT THESE PANELS Mounting Hole Dia.		Assembled Panel Thickness Minimum		Maximum		PART NO. Black	White	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter	
in.	mm.	in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.122	3,1	.078	2,0	.118	3,0	**13350**	**13351**	BR 122-078	.18	4,5	.08	2,0	.23	5,8
		.118	3,0	.157	4,0	**13352**	**13353**	BR 122-118	.22	5,5				
.161	4,1	.098	2,5	.138	3,5	**9141**	**9142**	BR 161-098	.20	5,0	.09	2,2	.31	8,0
		.138	3,5	.177	4,5	**13356**	**13357**	BR 161-138	.24	6,0				
.189	4,8	.047	1,2	.118	3,0	**13358**	**13359**	BR 189-047	.20	5,0	.13	3,2	.39	9,9
.201	5,1	.078	2,0	.118	3,0	**13360**	**13361**	BR 201-078	.20	5,0	.11	2,8	.37	9,5
		.118	3,0	.157	4,0	**13362**	**13363**	BR 201-118	.24	6,0				
		.157	4,0	.197	5,0	**13364**	**13365**	BR 201-157	.28	7,0				
		.197	5,0	.236	6,0	**13366**	**13367**	BR 201-197	.32	8,0				
		.236	6,0	.276	7,0	**13368**	**13369**	BR 201-236	.35	9,0				
		.276	7,0	.315	8,0	**13370**	**13371**	BR 201-276	.39	10,0				

Standard colors black and white.




HEYClip™ Expansion Rivets

- One-piece, all plastic expansion rivet.
- Designed to securely fasten a wide variety of materials in a range of applications.
- Inserts quickly from either side of assembly.
- Use with standard rivet setting tool - pull the pin through the body and panels are drawn together.
- Pin breaks off even with head and leaves an attractive, finished appearance.
- Effective for soft materials such as rubber, padded fabrics, etc.

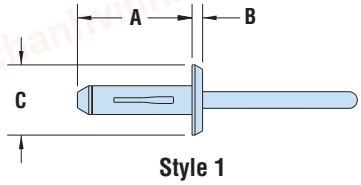

Style 1



Style 2

WILL FIT THESE PANELS Mounting Hole Dia.		Assembled Panel Thickness Minimum		Maximum		PART NO. Black	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter	
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.
EXR Style 1													
.157	4,0	.059	1,5	.177	4,5	**12230**	EXR 177-157	.73	18,5	.10	2,5	.31	8,0
.197	5,0	.118	3,0	.157	4,0	**12231**	EXR 157-197	.65	16,5	.07	1,8	.35	8,9
		.118	3,0	.236	6,0	**12232**	EXR 236-197	.79	20,0	.07	1,8	.47	12,0
		.236	6,0	.394	10,0	**12233**	EXR 394-197	.98	25,0				
.236	6,0	.157	4,0	.335	8,5	**12235**	EXR 335-236	1.10	28,0	.10	2,5	.51	13,0
.240	6,1	.157	4,0	.311	7,9	**12237**	EXR 311-240	1.14	29,0	.10	2,5	.67	16,9
.248	6,3	.295	7,5	.453	11,5	**12238**	EXR 453-248	1.26	31,9				
EXR Style 2													
.130	3,3	.039	1,0	.138	3,5	**12650**	EXR 138-130	.25	6,4	.06	1,4	.25	6,4
		.138	3,5	.256	6,5	**12651**	EXR 256-130	.38	9,6				
		.256	6,5	.374	9,5	**12652**	EXR 374-130	.50	12,7				
.161	4,1	.039	1,0	.138	3,5	**12653**	EXR 138-161	.25	6,4	.07	1,8	.32	8,0
		.138	3,5	.236	6,0	**12654**	EXR 236-161	.38	9,6				
		.236	6,0	.354	9,0	**12655**	EXR 354-161	.50	12,7				
.193	4,9	.059	1,5	.177	4,5	**12656**	EXR 177-193	.31	8,0	.08	2,0	.38	9,6
		.177	4,5	.295	7,5	**12657**	EXR 295-193	.44	11,2				
		.295	7,5	.413	10,5	**12658**	EXR 413-193	.57	14,4				
.224	5,7	.079	2,0	.197	5,0	**12659**	EXR 197-224	.38	9,6	.09	2,2	.47	12,0
		.197	5,0	.315	8,0	**12660**	EXR 315-224	.50	12,7				
		.315	8,0	.453	11,5	**12661**	EXR 453-224	.63	15,9				

Standard color black.

	BR	EXR Style 1	EXR Style 2
Material	Nylon 6	Nylon 6/6 Body & Acetal (POM) Pin	Nylon 6/6 Body with Polycarbonate Pin
Flammability Rating	94V-2	94V-2 Body and 94-HB Pin	94 V-2 Body and Pin
Temperature Range	-40° F (-40°C) to 239°F (115°C) (BR)		-40° F (-40°C) to 248°F (120°C) (EXR Styles)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com