chanhvinh.com




Heyco® Feets of Strength

Feet with Push Rivet

PART DIMENSIONS						PANEL DIMENSIONS						PART	DESCRIPTION
A Overall Height		B Top Diameter		C Bottom Diameter		Mounting Hole Diameter		Thickness Range Minimum		Thickness Range Maximum		NO. Black	
in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
FSR Series													
.16	4,0	.43	10,8	.39	10,0	.142	3,6	.02	0,5	.05	1,2	**2519**	FSR 16-14-05
								.05	1,2	.08	2,0	**2520**	FSR 16-14-08
								.06	1,5	.10	2,5	**2521**	FSR 16-14-10
								.10	2,5	.14	3,5	**2550**	FSR 16-14-14
.17	4,2	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	**2522**	FSR 17-17-07
								.07	1,8	.11	2,8	**2523**	FSR 17-17-11
								.11	2,9	.15	3,7	**2524**	FSR 17-17-15
								.15	3,8	.19	4,8	**2525**	FSR 17-17-19
.22	5,5	.56	14,2	.53	13,5	.122	3,1	.03	0,8	.07	1,8	**2517**	FSR 22-12-07
								.07	1,8	.11	2,8	**2518**	FSR 22-12-11
.24	6,0	.59	15,0	.55	14,0	.165	4,2	.02	0,6	.04	1,0	**2500**	FSR 24-17-04
								.04	1,0	.08	2,0	**2501**	FSR 24-17-08
								.08	2,0	.12	3,1	**2502**	FSR 24-17-12
						.204	5,2	.03	0,8	.05	1,2	**2506**	FSR 24-21-05
								.05	1,3	.09	2,3	**2507**	FSR 24-21-09
.24	6,0	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	**2526**	FSR 241-17-07
								.08	1,9	.11	2,8	**2527**	FSR 241-17-11
								.11	2,9	.16	4,0	**2528**	FSR 241-17-16
.31	8,0	.83	21,0	.79	20,0	.165	4,2	.01	0,3	.03	0,8	**2575**	FSR 31-17-03
								.03	0,8	.08	2,0	**2529**	FSR 31-17-08
								.08	2,1	.12	3,1	**2530**	FSR 31-17-12
.35	9,0	.59	15,0	.55	14,0	.165	4,2	.04	1,0	.08	2,0	**2532**	FSR 35-17-08
								.08	2,0	.12	3,1	**2533**	FSR 35-17-12

Standard color black.

- **Require only fingertip pressure** for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .16″ (4,0 mm) to .35″ (9,0 mm).
- Part Description Key: FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

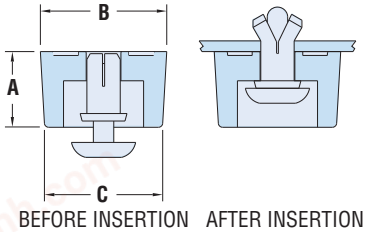

BEFORE INSERTION AFTER INSERTION

FSR

Material	Thermoplastic Rubber (TPR)
Flammability Rating	94-HB
Temperature Range	-30°F (-34°C) to 250°F (121°C)

Quick Specs