chanhvinh.com




Heyco® Nytye® Heat-Stabilized Nylon Cable Ties

Heat-Stabilized, UV Black

- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation–or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Close, evenly spaced teeth permit fine adjustment–from .025˝ (0,6 mm) on the smallest Nytyes to .063˝ (1,6 mm) on the largest.
- Heat stable material for higher temperature applications with an operating temperature range up to 221°F (105°C).

PART SPECIFICATIONS				PART NO.	DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Bundle Diameter		Heat-Stabilized/ UV Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.
Miniature									
18	80	0.63	16,0	**23100B**	NT-18-031	3.15	80	0.10	2,5
		0.87	22,0	**23102B**	NT-18-039	3.94	100		
		1.18	30,0	**23105B**	NT-18-047	4.72	120		
		1.38	35,0	**23107B**	NT-18-059	5.91	150		
		2.36	60,0	**23111B**	NT-18-078	7.87	200		
Intermediate									
40	178	1.38	35,0	**23123B**	NT-40-059	5.91	150	0.14	3,6
		1.97	50,0	**23126B**	NT-40-078	7.87	200		
		3.35	85,0	**23130B**	NT-40-118	11.81	300		
		4.02	102,0	**23134B**	NT-40-145	14.57	370		
Standard									
50	222	1.57	40,0	**23142B**	NT-50-063	6.30	160	0.19	4,8
		1.97	50,0	**23145B**	NT-50-078	7.87	200		
		2.76	70,0	**23149B**	NT-50-110	11.02	280		
		3.23	82,0	**23151B**	NT-50-118	11.81	300		
		4.02	102,0	**23155B**	NT-50-145	14.57	370		
		4.13	105,0	**23156B**	NT-50-157	15.75	400		
		5.12	130,0	**23158B**	NT-50-177	17.72	450		
120 Pound									
120	534	2.48	63,0	**23178B**	NT-120-098	9.84	250	0.30	7,6
		3.23	82,0	**23181B**	NT-120-118	11.81	300		
		3.98	101,0	**23185B**	NT-120-149	14.96	380		
		4.13	105,0	**23186B**	NT-120-157	15.75	400		
175 Pound									
175	778	7.48	190,0	**23208B**	NT-175-256	25.59	650	0.35	9,0
		11.42	290,0	**23218B**	NT-175-394	39.37	1000		
		14.49	368,0	**23220B**	NT-175-482	48.23	1225		

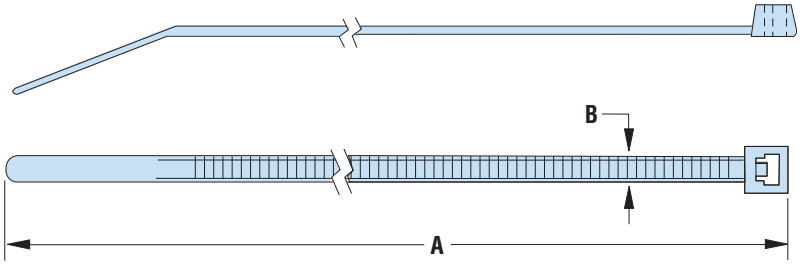

Quick Specs

Material	Nylon 6/6 UV Resistant and Heat Stabilized
Flammability Rating	UL 94 V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com