chanhvinh.com






# Heyco® Nytye® Nylon Cable Ties

- Smooth, radiused edges ensure that Nytyes won't cut into the cable's insulation–or the installer's hand.
- One-piece design reduces cost and installation time.
- Nytyes feature a bent tip for ease of pickup and insertion around small bundles. V-shaped raised ridges on the tip provide a sure grip.
- Close, evenly spaced teeth permit fine adjustment–from .025˝ (0,6 mm) on the smallest Nytyes to .063˝ (1,6 mm) on the largest.
- Standard UV Black Nytyes are available in 100 packs; add -P to Part No.; eg. 13140B-P
- Compliant with MS3367 and MIL-S-23190E

| PART SPECIFICATIONS | | | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Tensile Strength | | Max. Bundle Diameter | | Natural | UV Black | | A Length | | B Width | |
| Lbs. | N | in. | mm. | | | | in. | mm. | in. | mm. |
| **Miniature** | | | | | | | | | | |
| 18 | 80 | .63 | 16,0 | **13100** | **13100B** | NT-18-031 | 3.15 | 80 | .10 | 2,5 |
| | | .87 | 22,0 | **13102** | **13102B** | NT-18-039 | 3.94 | 100 | | |
| | | 1.18 | 30,0 | **13105** | **13105B** | NT-18-047 | 4.72 | 120 | | |
| | | 1.38 | 35,0 | **13107** | **13107B** | NT-18-059 | 5.91 | 150 | | |
| | | 1.57 | 40,0 | **13108** | **13108B** | NT-18-063 | 6.30 | 160 | | |
| | | 2.36 | 60,0 | **13111** | **13111B** | NT-18-078 | 7.87 | 200 | | |
| **Intermediate** | | | | | | | | | | |
| 40 | 178 | .87 | 22,0 | **13120** | **13120B** | NT-40-039 | 3.94 | 100 | .14 | 3,6 |
| | | 1.18 | 30,0 | **13121** | **13121B** | NT-40-047 | 4.72 | 120 | | |
| | | 1.30 | 33,0 | **13122** | **13122B** | NT-40-055 | 5.51 | 140 | | |
| | | 1.38 | 35,0 | **13123** | **13123B** | NT-40-059 | 5.91 | 150 | | |
| | | 1.65 | 42,0 | **13124** | **13124B** | NT-40-070 | 7.09 | 180 | | |
| | | 1.97 | 50,0 | **13126** | **13126B** | NT-40-078 | 7.87 | 200 | | |
| | | 2.56 | 65,0 | **13128** | **13128B** | NT-40-099 | 9.92 | 252 | | |
| | | 3.15 | 80,0 | **13129** | **13129B** | NT-40-110 | 11.02 | 280 | | |
| | | 3.35 | 85,0 | **13130** | **13130B** | NT-40-118 | 11.81 | 300 | | |
| | | 4.02 | 102,0 | **13134** | **13134B** | NT-40-145 | 14.57 | 370 | | |
| **Standard** | | | | | | | | | | |
| 50 | 222 | .94 | 24,0 | **13140** | **13140B** | NT-50-047 | 4.72 | 120 | .19 | 4,8 |
| | | 1.57 | 40,0 | **13142** | **13142B** | NT-50-063 | 6.30 | 160 | | |
| | | 1.65 | 42,0 | **13143** | **13143B** | NT-50-072 | 7.20 | 183 | | |
| | | 1.97 | 50,0 | **13145** | **13145B** | NT-50-078 | 7.87 | 200 | | |
| | | 2.56 | 65,0 | **13147** | **13147B** | NT-50-098 | 9.84 | 250 | | |
| | | 2.76 | 70,0 | **13149** | **13149B** | NT-50-110 | 11.02 | 280 | | |
| | | 3.23 | 82,0 | **13151** | **13151B** | NT-50-118 | 11.81 | 300 | | |
| | | 3.54 | 90,0 | **13153** | **13153B** | NT-50-137 | 13.78 | 350 | | |
| | | 4.02 | 102,0 | **13155** | **13155B** | NT-50-145 | 14.57 | 370 | | |
| | | 4.13 | 105,0 | **13156** | **13156B** | NT-50-157 | 15.75 | 400 | | |
| | | 5.12 | 130,0 | **13158** | **13158B** | NT-50-177 | 17.72 | 450 | | |
| | | 5.91 | 150,0 | **13160** | **13160B** | NT-50-196 | 19.68 | 500 | | |

Standard colors natural and UV Black. Consult Heyco for heat-stabilized material and colors.
Standard UV Black Nytyes available in 100 packs; add -P to Part No.; eg. 13140B-P

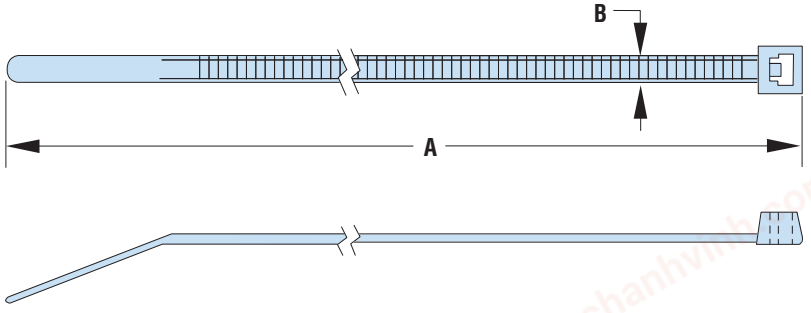


## Heyco® Cable Tie Tensioning Tool



**Part No. 0998** (for Nylon) and **0996** (for Stainless Steel) fits all standard duty Nytyes. Metal construction, has three tension settings, and automatically trims excess.

| | | |
|---|---|---|
| Material | | Nylon 6/6 |
| Certifications | c UL us | Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523 |
| Flammability Rating | | 94V-2 |
| Temperature Range | | -40°F (-40°C) to 185°F (85°C) |

Quick Specs



1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com