chanhvinh.com



Heyco® Nylon Hose Clamps

EFFECTIVE CLAMP RANGE Minimum Diameter in.	mm.	Maximum Diameter in.	mm.	PART NO. 6/6 NYLON Black	White	GF* NYLON Black	DESCRIPTION	PART DIMENSIONS A in.	mm.	B in.	mm.
Regular Style											
.25	6,4	.31	7,9	—	—	**2302**	HC 250	.13	3,2	.04	1,0
.34	8,7	.41	10,3	**2306**	**2307**	**2308**	HC 344				
.41	10,3	.47	11,9	**2310**	**2311**	**2312**	HC 406				
.47	11,9	.53	13,5	**2314**	**2315**	**2316**	HC 468				
.53	13,5	.59	15,1	**2318**	**2319**	**2320**	HC 531	.21	5,3		
.59	15,1	.66	16,7	**2322**	**2323**	**2324**	HC 593				
.67	17,1	.81	20,6	**2326**	**2327**	**2328**	HC 672				
.75	19,1	.88	22,2	**2330**	**2331**	**2332**	HC 750				
.88	22,2	1.00	25,4	**2334**	**2335**	**2336**	HC 875				
.95	24,1	1.09	26,2	**2338**	**2339**	**2340**	HC 953			.07	1,8
1.03	26,2	1.19	30,2	**2342**	**2343**	**2344**	HC 1031	.31	7,9		
1.25	31,8	1.44	36,5	**2346**	**2347**	**2348**	HC 1250				
1.41	35,7	1.63	41,3	**2350**	-	-	HC 1406				
1.59	40,4	1.81	46,0	**2354**	**2355**	**2356**	HC 1593	.36	9,1		
1.69	42,9	1.91	48,4	**2358**	**2359**	**2360**	HC 1687				
1.88	47,6	2.13	54,0	**2362**	**2363**	**2364**	HC 1875	.40	10,2		
Strap Mate Style											
2.25	57,1	2.88	73,0	-	-	**2377**	HC 2.25				
2.75	69,8	3.63	92,1	-	-	**2380**	HC 2.75	.44	11,2	.08	2,0
3.50	88,9	4.25	108,0	-	-	**2383**	HC 3.5				
4.00	101,6	5.00	127,0	-	-	**2386**	HC 4.0				


Standard colors 6/6 nylon black and white. Glass filled nylon standard color is black.
*HC 250 features a single tang design in glass-filled nylon only.

- **Quick and easy installation. Tighten instantly with hand pliers or Air Tools.**
- **Reusable**. Can be removed without cutting.
- Glass-filled nylon clamps offer additional clamping strength.
- Outlast tubing under pressure.
- Lightweight yet resist corrosion, salt water, weak acids, grease, and common solvents.


Available in Small Packs NEW

PART NO.	DESCRIPTION	QTY
2307-P	HC 344 WHITE 20PK	20
2311-P	HC 406 WHITE 20PK	
2315-P	HC 468 WHITE 20PK	
2319-P	HC 531 WHITE 20PK	
2323-P	HC 593 WHITE 20PK	
2327-P	HC 672 WHITE 20PK	
2331-P	HC 750 WHITE 20PK	
2335-P	HC 875 WHITE 20PK	
2339-P	HC 953 WHITE 20PK	
2343-P	HC 1031 WHITE 20PK	
2347-P	HC 1250 WHITE 20PK	

Regular Style



Strap Mate Style




Heyco® Pneumatic Air Tool for Nylon Hose Clamps

For Lockit and Regular Style Hose Clamps only

AIR TOOL PART NO. INCLUDING JAWS	JAW PART NO.* Upper	Lower
0170	**0T83**	**0T84**

*Jaw Part No. if purchased separately.

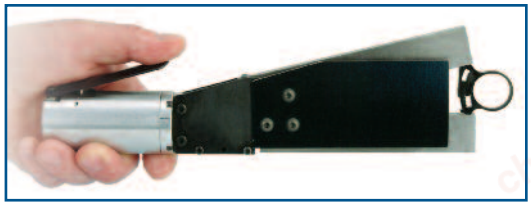

- Allows for a **semi-automated process** which increases speed over manual tools.
- Activated by hand lever reducing stress on the hand and the risk of carpal tunnel syndrome associated with repetitive assembly.
- Maximum Pressure Rating: 125 psi
- Adjustable jaws allow tool to accommodate a wide range of Heyco Hose Clamps.
- Operates only when lever is depressed.
- Tool operates on standard shop air.

Materials	Nylon 6/6 or glass-filled Nylon
Flammability Rating	94V-2 for 6/6 Nylon, 94HB for glass-filled Nylon
Temperature Range	32°F (0°C) to 221°F(105°C)