chanhvinh.com




Heyco® Original Strain Relief Bushings


Internal Radii for Flat Cables
.500˝ (12,7 mm) Mounting Holes

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESC.	PART DIMENSIONS				Mounting Hole Plug
				A		B		Finished				C		D		
UL Type	AWG/ Conds.	Approximate Size		Mounting Hole Dia.		To Prevent Rotation		Fit Panel Thickness*		Black		Head Length		Body Length		
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	Part No.
SPT-1	18/3	.12 x .30	3,0 x 7,6	.500	12,7	.465	11,8	.040	1,0	**1181**	SR 4A-6	.270	6,9	.546	13,9	2491
SPT-2 & HPN	18/2	.15 x .28	3,8 x 7,1													
SPT-1	18/3	.12 x .30	3,0 x 7,6	.500	12,7	.465	11,8	.062	1,6	**1187**	SR 4N-6	.270	6,9	.546	13,9	2491
SPT-2 & HPN	18/2	.15 x .28	3,8 x 7,1													
	16/2	.16 x .30	4,1 x 7,6	.515	13,1											
Same as SR 4N-6 above except →								.100	2,5	**1190**	SR 4K-6	.270	6,9	.546	13,9	2491


Standard color black. Consult Heyco for white and other colors.
* Maximum Panel Thickness. Part has additional clearance. Consult Heyco for your Custom Finished Fit Panel Thickness.

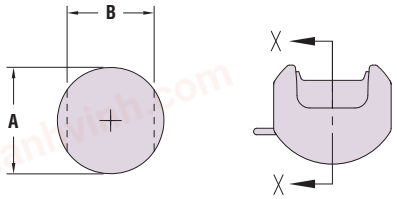

MOUNTING HOLE

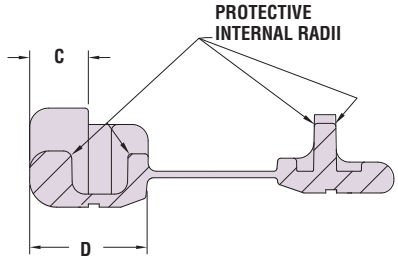

- Extra body length with **flex-protecting** internal radii.
- Wider approved wire range than typical 4-series Strain Reliefs; SR 4A-6 features a 1,0 mm locking slot for Thin Panels.
- Absorb forces of pull, push, and twist, to protect the electrical lifeline of your application.
- For maximum flex protection, see Bell-Mouth and Pigtail Strain Reliefs on pages 4-23 and 4-24.
- Securely anchors, insulates and protects cables at panel entry points.
- To assemble SR 4A-6 use **Part No. 0021** R 291 Pliers, designed for .040˝ (1,0 mm) panel thickness, or semi-automated equipment.
- To assemble SR 4N-6 and SR 4K-6, use **Part No. 0022** R 29 Pliers, or semi-automated equipment. See pages 4-27 thru 4-29 for details.
- Use Mounting Holes Plug **Part No. 2491** to standardize panel design where the Strain Relief is not required.
- For Double D Mounting Hole Punches, see page 4-30.

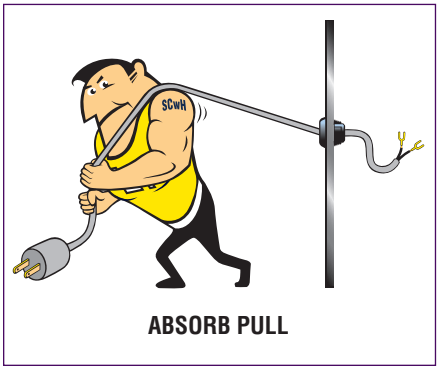

ABSORB PULL



ABSORB PUSH



ABSORB TWIST

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331
	Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-.04°F (-18°C) to 221°F (105°C)

Quick Specs