chanhvinh.com




Heyco® PCB Contacts

PCB Blade, Pins, and Female Connectors


	Type	PART DATA Dimensions in.	mm.	For Maximum PCB Thickness in.	mm.	Material	PART NO. Non-polarized	Polarized	FEEDS
	Blades	**Length**							
	Snap-thru	.847	21,5	.047	1,2	Brass	**5200**	**5201**	Bulk
NEW!		1.030	26,1	.078	2,0	Brass	**8179**	–	
	Pins*	**Diameter**							
	Snap-Thru	.187	4,7	.047	1,2	Brass	**5940**	–	Bulk
	Solder	.187	4,7	.047	1,2	Brass	**5907**	–	Bulk
		Length							
NEW!	Female	1.00	27,4	Rivet Mount†		Brass	**7347**	–	Bulk
	1155-90 Female**								
	Wiping Contact 90°	.790	20,6	.047	1,2	Brass	**7261**	–	Bulk

*For additional Heyco Specialty Pins, see page 8-42.
**For additional Heyco Female Cord Connectors, see page 8-50.
† .160˝ (4,1 mm) mounting hole.


- Designed for printed circuit board applications when **connection to AC power is required**.
- Can be used for either NEMA 1-15 or 5-15 applications.
- **Part Nos. 5200 and 5201** are full wide designed for added support when attached to the printed circuit board.
- For our complete line of stamped Power Components, see Section 8.
- For our complete line of Nylon PCB Supports, see section 7.
- DFARS Compliant

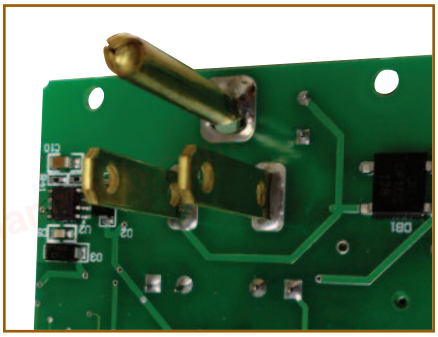


5200

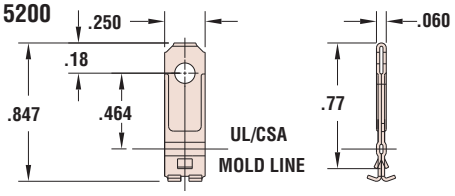


5201

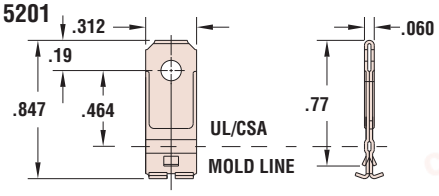


5940

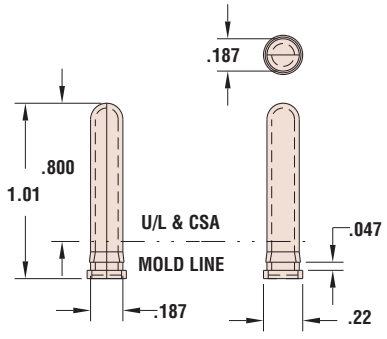

5907



7261

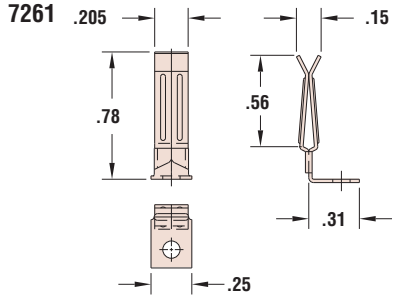

Materials	Alloy 260 Brass (70% Cu, 30% Zn)

Quick Specs