chanhvinh.com




- Easy to use: Just twist on wire!
- Allows breakouts of single/ multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables and hose, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13″ (3,2 mm) to 7.00″ (177,8 mm) diameters.
- Conforms to: Fed Spec LP390, Mil I-631D, Mil P-21922B
- For hose and cable **clamps** see pages 7-36 through 7-43.

Heyco® Hose and Cable Wrap-Polyethylene

Standard

BUNDLE RANGE Minimum Diameter		BUNDLE RANGE Maximum Diameter		PART NO. UV Black	PART NO. Natural	DESCRIPTION	PART DIMENSIONS A Outside Diameter		PART DIMENSIONS B Pitch		PART DIMENSIONS C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.13	3,2	1.50	38,1	**8904**	**8905**	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	**8908**	**8909**	CW 250 PE	.25	6,3	.38	9,5	.05	1,3
.31	7,9	3.00	76,2	**8912**	**8913**	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	**8916**	**8917**	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	**8920**	**8921**	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	**8924**	**8925**	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	**8928**	**8929**	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0

Standard colors UV black or natural.
* Parts are not UR recognized.

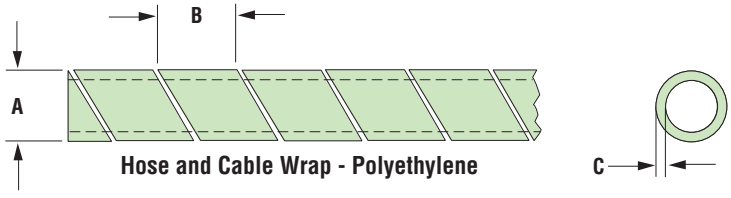

Hose and Cable Wrap - Polyethylene




- Easy to use: Just twist on wire!
- Allows breakouts of single/ multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13″ (3,2 mm) to 7.00″ (177,8 mm) diameters.
- Available in UV black or natural nylon color.
- Conforms to: ASTM D 4066, Group 2; Fed Spec LP410A
- For hose and cable **clamps**, see pages 7-36 through 7-43.

Heyco® SunWrap™-Nylon

BUNDLE RANGE Minimum Diameter		BUNDLE RANGE Maximum Diameter		PART NO. UV Black	PART NO. Natural	DESCRIPTION	PART DIMENSIONS A Outside Diameter		PART DIMENSIONS B Pitch		PART DIMENSIONS C Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.13	3,2	1.50	38,1	**8936**	**8937**	CW 187 N*	.19	4,8	.25	6,3	.02	0,5
.19	4,8	2.00	50,8	**8940**	**8941**	CW 250 N	.25	6,3	.38	9,5	.03	0,6
.31	7,9	3.00	76,2	**8944**	**8945**	CW 375 N	.38	9,5	.44	11,1	.04	0,9
.38	9,5	4.00	101,6	**8948**	**8949**	CW 500 N	.50	12,7	.50	12,7		
.50	12,7	4.50	114,3	**8952**	**8953**	CW 625 N*	.63	15,9	.63	15,9	.03	0,8
		5.00	127,0	**8956**	**8957**	CW 750 N	.75	19,0	.75	19,1		
1.00	25,4	7.00	177,8	**8960**	**8961**	CW 1000 N	1.00	25,4	1.00	25,4		

Standard colors UV black or natural.
* Parts are not UL recognized.

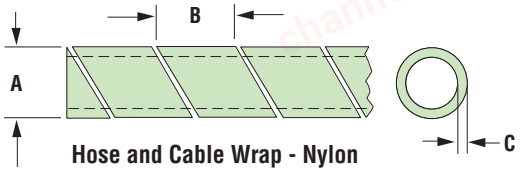

Hose and Cable Wrap - Nylon

Material	Polyethylene
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E173954.
Temperature Range	-76°F (-60°C) to 190°F (88°C) UL rated temp not to exceed 122°F (50°C)

Material	Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E173954
Temperature Range	-40°F (-40°C) to 250°F (121°C) – UL rated temp not to exceed 149°F (65°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com