chanhvinh.com

Heyco® Threaded Vent Plugs


Open vent holes only



THREAD Type/Size	PART NO. Black	PART NO. Gray	DESCRIPTION	PART DIMENSIONS A Wrenching Flats in.	A Wrenching Flats mm.	B Overall Length in.	B Overall Length mm.
NPT							
NPT 1/4	**3551B**	**3551**	TVP NPT 1/4	.63	16,0	.66	16,8
NPT 3/8	**3552B**	**3552**	TVP NPT 3/8	.83	21,0	.69	17,5
NPT 1/2	**3553B**	**3553**	TVP NPT 1/2	.98	24,9	.81	20,6
NPT 3/4	**3554B**	**3554**	TVP NPT 3/4	1.29	32,8	.86	21,8
PG - for PG Thread specifications, see page 3-49							
Pg 7	**3566B**	**3566**	TVP Pg 7	.63	16,0	.53	13,5
Pg 9	**3567B**	**3567**	TVP Pg 9	.83	21,0		
Pg 13.5	**3568B**	**3568**	TVP Pg 13.5	.98	24,9	.62	15,8
Pg 21	**3569B**	**3569**	TVP Pg 21	1.29	32,8	.76	19,3
Metric							
M12	**3557B**	**3557**	TVP M12	.63	16,0	.53	13,5
M16	**3558B**	**3558**	TVP M16	.83	21,0		
M20	**3559B**	**3559**	TVP M20	.98	24,9	.62	15,8

Standard color Black. Consult Heyco for other colors.

- Permit the passage of air for ventilation and heat dissipation.
- Quick and easy installation into Threaded Holes.
- For multiple thread sizes and types.
- All sizes and types feature six (6) vent holes.
- Threaded plugs for hydraulic and pneumatic applications.
- Lower cost option over brass or steel plugs.
- Non-corrosive-resist salt water, weak acids, gasoline, alcohol, oil, grease and common solvents. Resist oil and heat up to 221°F (105°C).
- Approximate Head Thickness: .21˝ (5,3 mm). Thickness may vary.
- Hex shaped head for wrench installation.
- Electrically non-conductive Nylon 6/6.
- For **Liquid Tight** Threaded Vent Plugs, see page 5-5.

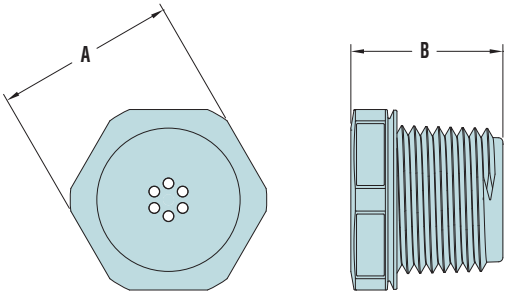

Material	Nylon 6/6 bodies with UL (f1) rating
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs