chanhvinh.com




Heyco® Vent Plugs and Thick Panel Vent Plugs

Mounting Hole Diameter Range: .500″ (12,7 mm) to 4.000″ (101,6 mm)

- Permit the passage of air for ventilation and heat dissipation.
- Quick and easy installation with only fingertip pressure.
- Convex, matte finish head tapers to a thin edge.
- VP-500 through VP-875 have .094″ (2,4 mm) diameter vent holes. All other sizes have .125″ (3,2 mm) diameter vents.
- Lock firmly into panel up to .250″ (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in .500″ (12,7 mm) to 4.000″ (101,6 mm) diameter holes.
- Approximate Head Thickness: .062″ (1,6 mm). Thickness may vary.
- Heyco Louvered Plugs available, see page 5-3.

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS				
					No. of Vent Holes	A Head Diameter		B Overall Height	
in.	mm.	Black	White			in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125″ (3,2 mm)									
.500	12,7	**2637**	**2638**	VP 500	4	.56	14,2	.41	10,3
.562	14,3	**2647**	-	VP 562	4	.66	16,7		
.625	15,9	**2657**	**2658**	VP 625	5	.73	18,7		
.750	19,1	**2677**	**2678**	VP 750	8	.91	23,0		
.812	20,6	**2688**	**2689**	VP 812	8	.89	22,6		
.875	22,2	**2697**	**2698**	VP 875	9	1.02	25,8	.45	11,5
1.000	25,4	**2707**	**2708**	VP 1000	9	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	**2726**	**2727**	VP 1093	9	1.22	30,9		
1.187	30,1	**2736**	**2737**	VP 1187	10	1.31	33,3		
1.250	31,7	**2743**	**2744**	VP 1250	10	1.38	34,9		
		2797	-	SVP 1250-4	4				
1.375	34,9	**2756**	**2757**	VP 1375	11	1.50	38,1		
1.500	38,1	**2766**	**2767**	VP 1500	13	1.67	42,4		
1.750	44,5	**2776**	**2777**	VP 1750	13	1.91	48,4		
2.000	50,8	**2786**	**2787**	VP 2000	19	2.14	54,4	.47	11,9
Multiple Locking Steps for Panel Thickness up to .250″ (6,4 mm)									
.500	12,7	**3010**	**3011**	VPT 500	4	.58	14,7	.56	14,3
.625	15,9	**3013**	**3014**	VPT 625	5	.73	18,7		
.750	19,1	**2426**	**2427**	VPT 750	8	.91	23,0		
.875	22,2	**3152**	**3153**	VPT 875	9	1.02	25,8		
1.000	25,4	**3154**	**3155**	VPT 1000	9	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	**3032**	**3033**	VPT 1093	9	1.22	30,9		
1.187	30,1	**3160**	**3161**	VPT 1187	10	1.31	33,3		
1.250	31,7	**3034**	**3035**	VPT 1250	10	1.38	34,9		
1.375	34,9	**3036**	**3037**	VPT 1375	11	1.50	38,1		
1.500	38,1	**3156**	**3157**	VPT 1500	13	1.67	42,4		
1.750	44,5	**3038**	**3039**	VPT 1750	13	1.91	48,4		
2.000	50,8	**3158**	**3159**	VPT 2000	19	2.14	54,4	.58	14,7
2.500	63,5	**2793**	**2794**	VP 2.5	19	2.72	69,0	.75	19,1
3.000	76,2	**2458**	**2459**	VP 3.0	26	3.15	80,0	.74	18,8
3.500	88,9	**2467**	**2468**	VP 3.5	38	3.66	92,9	.75	19,1
4.000	101,6	**2476**	**2477**	VP 4.0	48	4.16	105,6		

Standard color black. Consult Heyco for other colors.

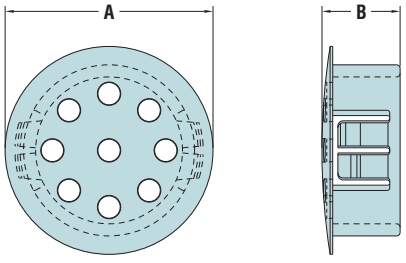

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579
	Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com