
chanhvinh.com

MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

ACTUATOR–SWITCH

CATALOG LISTING
JV–5
FAA–PMA

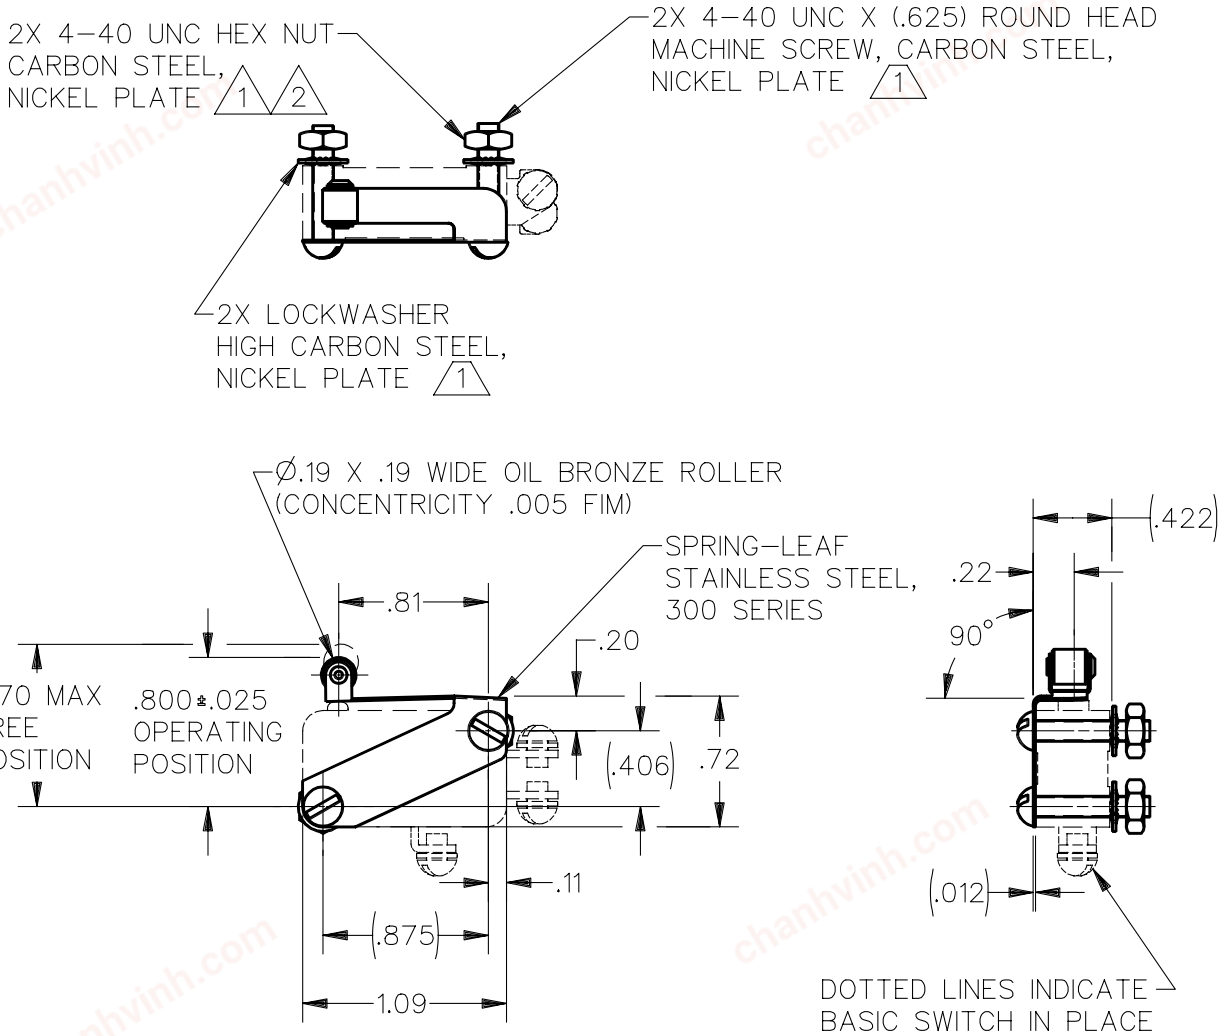

NOTES
1. FURNISHED UNASSEMBLED
2. MOUNTING TORQUE: 5 IN LBS MAX
3. – WHEN INSTALLED PER MICRO SWITCH SPECIFICATION, ACTUATOR WILL MEET OR EXCEED THE EXPECTED MECHANICAL LIFE OF THE BASIC SWITCH IMPLEMENTED
4. – ACTUATOR ONLY, NO BASIC SWITCH INSTALLED
5. CHARACTERISTICS WITH V3–1001 BASIC SWITCH INSTALLED
6. – MARKING ON INDIVIDUAL PACKAGES OF ACTUATORS SHALL INCLUDE FAA–PMA

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS 5	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE — — — — 18 OZ MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE — — — — — 4 OZ MIN		ONE PLACE (.0) ±.030
PRETRAVEL — — — — — — .060 MAX		TWO PLACE (.00) ±.015
DIFFERENTIAL TRAVEL — — — .016 MAX		THREE PLACE (.000) ±.005
OVERTRAVEL — — — — — — .031 MIN		ANGLES ±2°
		WEIGHT .015 LB MAX

CATALOG LISTING JV–5 PAGE 1 OF 1
ISSUE M 14

REVISIONS					
		REPLACES	RELEASE NO.	CHECK	
A	CO–84929				
	DCS 19 AUG 97				
B	CO–93327				
	DLT 2 DEC 98				
				CHECK	
				CHECK	
		20 AUG 97		DCS	
				CHECK	
		18 AUG 97		DCS	

DDM/CAD DRAWN