chanhvinh.com

IDEC

Think Automation and beyond...

MW Series Control Units



IDEC CORPORATION

chanhvinh.com

ø22 MW Series Control Units

IP66 waterproof and dust-proof enclosure
Suitable for installation in harsh environment, such as construction machines

- Prevents entry of sand and dust.
- Reliable operation under high operation load
- Solder/tab terminal #187
- Various pushbuttons, selector switches and screw terminal sockets are available.
- Degree of protection: IP66 (IEC 60529)
- EN compliant and CCC approved.



Specifications

Standard Operating Condition	Operating temperature: –25 to +70°C (no freezing) Storage Condition: –30 to +80°C (no freezing) Relative humidity: 45 to 85% RH (no condensation)
Contact Resistance	50 mΩ maximum (initial value)
Insulation Resistance	100 MΩ minimum (500V DC by megger)
Dielectric Strength	Between live and dead metal parts: 2500V AC, 1 minute Between live parts of different poles: 2500V AC, 1 minute
Vibration Resistance	Damage limits, operating extremes: 5 to 55 Hz, amplitude 0.5 mm
Shock Resistance	Damage limits: 1,000 m/s^2 Operating extremes: 100 m/s^2
Mechanical Life	Momentary: 500,000 operations minimum Maintained: 250,000 operations minimum Selector switch: 250,000 operations minimum
Electrical Life	1,00,000 operations minimum (Switching frequency: 1200 operations/hour)
Degree of Protection	IP66 (IEC 60529)
Terminal Style	Solder/tab terminal #187
Weight (Approx.)	Pushbutton: Flush 30g, Mushroom 35g Selector switch: 35g

Contact Ratings

Insulation Voltage			125V	
Thermal Current			10A	
Operational Voltage			24V	110V
Operational Current	AC, 50/60 Hz	Resistive Load AC-12	—	10A
		Inductive Load AC-15	—	5A
	DC	Resistive Load DC-12	8A	—
		Inductive Load DC-13	5A	—
Contact Material			Silver	

- The operational current is indicated in the classification of the closed circuit and breaking current under JIS C4520-1991. The test conditions of this classification are as follows.
  1. Power factor of AC inductive load in closed circuit is 0.4 ±0.05. The closed circuit current is 50A (10 times as large as the operational current) and the power factor is 0.7 ±0.05.
  2. Time constant of DC inductive load is T0.95 = 300 ms.

MW1B Pushbuttons


Package Quantity: 1

Shape	Operation	Contact	Part No.	Button Color Code
Flush 	Momentary	SPDT	**MW1B-M11∗**	B (black) G (green) R (red) S (blue) W (white) Y (yellow)
		DPDT	**MW1B-M12∗**	
	Maintained	SPDT	**MW1B-A11∗**	
		DPDT	**MW1B-A12∗**	
Mushroom 	Momentary	SPDT	**MW1B-M31∗**	B (black) G (green) R (red) Y (yellow)
		DPDT	**MW1B-M32∗**	
	Maintained	SPDT	**MW1B-A31∗**	
		DPDT	**MW1B-A32∗**	


- Specify a button color code in place of ∗ in the Part No.

Mounting Hole Layout

Flush




Mushroom




Note: Determine the mounting centers to ensure easy operation.

Dimensions


Flush Pushbutton

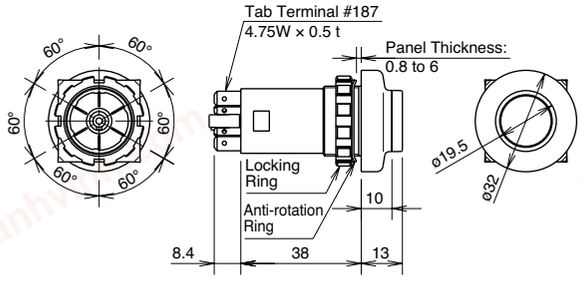

Mushroom Pushbutton

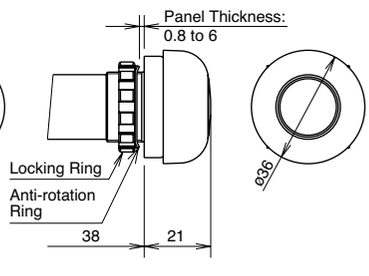

Terminal Arrangement
(Bottom View)



Note: 1 to 6 indicate terminal numbers shown on the side of the housing.
- SPDT has only NC1, NO1, and C1.

All dimensions in mm.

chanhvinh.com






MW1S Selector Switches

Package Quantity: 1

Shape	No. of Positions	Operator Position	No. of Contacts	Part No.
Knob Operator 	90° 2-Position	L R Maintained	DPDT	**MW1S-2Y2**
	55° 3-Position	L C R Maintained	DPDT	**MW1S-3Y2**
Lever Operator 	90° 2-Position	L R Maintained	DPDT	**MW1S-2L2**
	55° 3-Position	L C R Maintained	DPDT	**MW1S-3L2**


• Operator color: White indicator on black knob or lever.

Contact Operation


Position	Contact	Operator Position and Contact Operation (Top View)		
		Left	Center	Right
L R 90° 2-Position Maintained	DPDT		—	
L C R 55° 3-Position Maintained	DPDT			

Mounting Hole Layout

Knob Operator




Lever Operator



Note: Determine the mounting center to ensure easy operation.


Terminal Arrangement (Bottom View)




Note: 1 to 6 indicate terminal numbers shown on the side of the housing.

Dimensions

Knob Operator




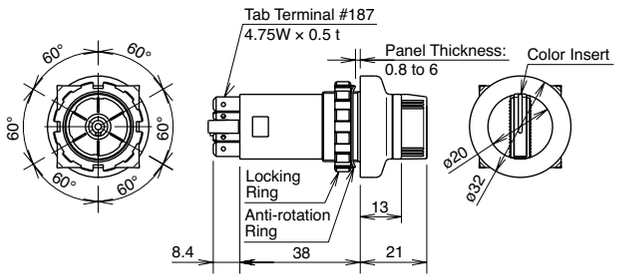


Lever Operator

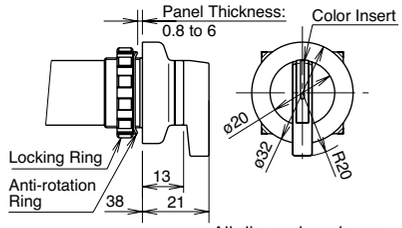

All dimensions in mm.


Accessories

Name/Shape	Specifications	Part No.	Ordering No.	Package Quantity	Remarks
Screw Terminal Socket 	Applicable wire for screw terminal: 2 mm² × 2 wires Weight: Approx. 27g	**MW9Z-C1N**	**MW9Z-C1N**	1	• Quick attachment  Note 1: For mushroom pushbuttons and lever selector, the dimension with * should be 40 mm or more. Note 2: Determine the mounting centers in consideration of accessibility during wiring and safety. Particularly when a crimping terminal is used, be careful about the dimensions of the crimping terminal. 
Locking Ring Wrench 	Metal Weight: Approx. 150g	**MW9Z-T1**	**MW9Z-T1**	1	• Locking ring wrench used for mounting the unit into the panel cut out. 
Mounting Hole Plug 	Diecast Metal (Locking ring: polyamide) Weight: Approx. 18g	**LW9Z-BM**	**LW9Z-BM**	1	• Used to fill any unnecessary mounting holes in a panel. • Tightening torque for the locking ring: 1.2 N·m • Degree of protection: IP65 

chanhvinh.com

ø22 MW Series Control Units

Maintenance Parts

Name/Shape	Specifications	Part No.	Ordering No.	Package Quantity	Remarks
Button 	For flush	ABS1BN-*	ABS1BN-*PN05	10	Specify a color code in place of * in the Ordering No. B (Black), G (Green), R (Red), S (Blue), W (White), Y (Yellow)
	For mushroom	MW9Z-B13*	MW9Z-B13*PN02	10	Specify a color code in place of * in the Ordering No. B (Black), G (Green), R (Red), Y (Yellow)
Color Insert 	For selector	HA9Z-HC1*	HA9Z-HC1*PN05	5	Specify a color code in place of * in the Ordering No. G (Green), R (Red), S (Blue), W (White), Y (Yellow)
Locking Ring 	Metal	MW9Z-LN	MW9Z-LN	1	—


Safety Precautions

- Turn off power to the switch before installation, removal, wiring, maintenance, and inspection. Failure to turn power off may cause electrical shocks or fire hazard.
- For wiring, use wires of proper size to meet the voltage and current requirements. Tighten the M3.5 terminal screws of the screw terminal socket to a tightening torque of 1.0 to 1.3 N·m. If the terminal screw is incompletely soldered or loose, the terminal may heat up, causing a fire.


Instructions

Panel Mounting

1. Remove the locking ring and the anti-rotation ring, and insert the unit into the panel cut-out.

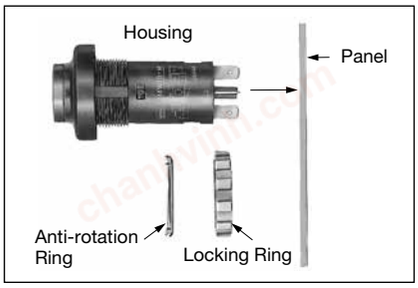

2. After inserting the unit, install the anti-rotation ring and the locking ring to the housing in this sequence.
Note: Be careful about orientation of the anti-rotation ring.

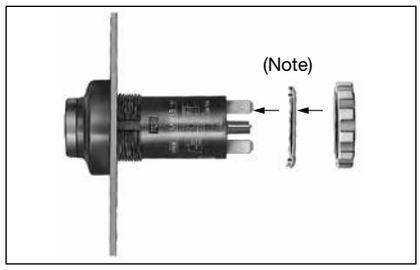


Notes on Panel Mounting

When mounting the operator onto a panel, use the optional locking ring wrench (MW9Z-T1) to tighten the locking ring. Tightening torque must not exceed 4.0 N·m. Do not use pliers. Excessive tightening will damage the locking ring. Recommended tightening torque: 2 to 4 N·m

Other Notes

Installing Nameplate

Do not install a nameplate between the panel front surface and the rubber boot. If a nameplate of this type is installed, then the degree of protection will be degraded. Directly attach a nameplate to the panel surface.

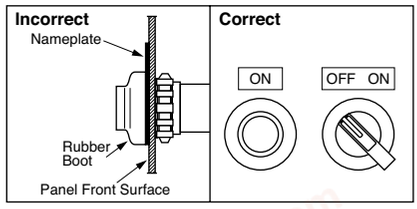

Oil-proof Characteristics

The oil-proof rating of the MW series unit is intended for general-purpose coolant oil. The MW series unit may not be used for certain oils. Contact IDEC for more information.

Notes on Wiring

Solder the terminal at 350°C within 3 seconds, using a 60W soldering iron. Sn-Ag-Cu solder is recommended. When soldering, do not touch the switch housing with the soldering iron. Also ensure that no tensile force is applied to the terminals. Do not bend the terminals or apply excessive force to the terminals. Use a non-corrosive rosin flux.

Specifications and other descriptions in this brochure are subject to change without notice.

IDEC CORPORATION
6-64, Nishi-Miyahara 2-Chome, Yodogawa-ku, Osaka 532-0004, Japan
Tel: +81-6-6398-2571, Fax: +81-6-6392-9731, E-mail: marketing@idec.co.jp

IDEC CORPORATION (USA)
Tel: +1-408-747-0550 / (800) 262-IDEC (4332)
E-mail: opencontact@idec.com

IDEC CANADA LIMITED
Tel: +1-905-890-8561, Toll Free: (888) 262-IDEC (4332)
E-mail: sales@ca.idec.com

IDEC AUSTRALIA PTY. LTD.
Tel: +61-3-8523-5900, Toll Free: 1800-68-4332
E-mail: sales@au.idec.com

IDEC ELEKTROTECHNIK GmbH
Tel: +49-40-25 30 54 - 0 E-mail: service@eu.idec.com

IDEC (SHANGHAI) CORPORATION
Tel: +86-21-6135-1515 E-mail: idec@cn.idec.com

IDEC (BEIJING) CORPORATION
Tel: +86-10-6581-6131

IDEC (SHENZHEN) CORPORATION
Tel: +86-755-8356-2977

IDEC IZUMI (H.K.) CO., LTD.
Tel: +852-2803-8989 E-mail: info@hk.idec.com

IDEC TAIWAN CORPORATION
Tel: +886-2-2698-3929 E-mail: service@tw.idec.com

IDEC IZUMI ASIA PTE. LTD.
Tel: +65-6746-1155 E-mail: info@sg.idec.com

IDEC ASIA (THAILAND) CO.,LTD.
Tel: +662-392-9765, E-mail: sales@th.idec.com

www.idec.com

Cat. No. EP1434-1 FEBRUARY 2016 PDF