
chanhvinh.com

I7R215

Inductive ring sensor

I7R3025-FPKG/DY/US-100-IPF

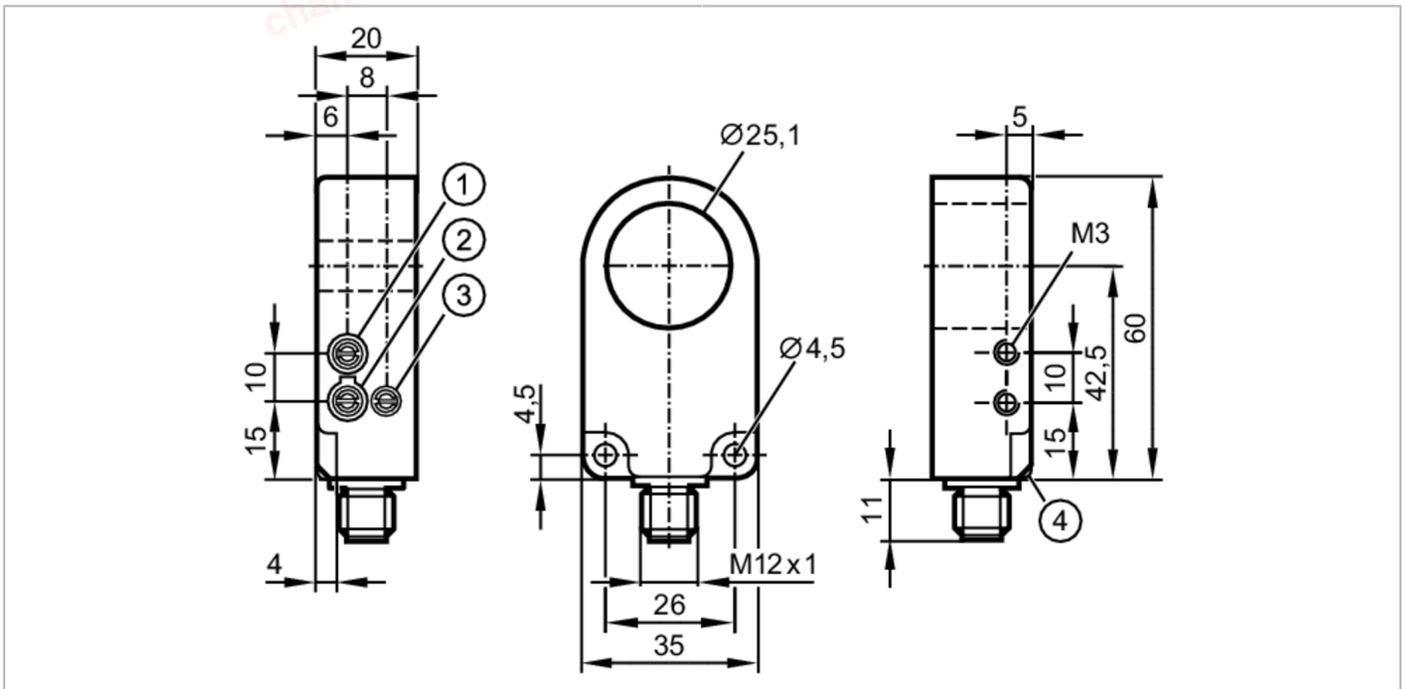

1 sensitivity
2 Output function
3 pulse stretching time

Product characteristics		
Electrical design		PNP
Output function		normally open / normally closed; (selectable)
Housing		circular
Dimensions	[mm]	60 x 35 x 20
Application		
Operating principle		dynamic
Electrical data		
Operating voltage	[V]	10...35 DC
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	200
Short-circuit protection		yes
Overload protection		yes

chanhvinh.com

I7R215

Inductive ring sensor

I7R3025-FPKG/DY/US-100-IPF

Detection zone			
Resolution of steel ball (diameter)	[mm]		1.2
Max. part speed	[m/s]		35
Response times			
Pulse stretching	[ms]		0.1...150
Pulse stretching adjustable			yes
Max. fall time	[ms]		0.2
Response time	[ms]		< 0.2
Operating conditions			
Ambient temperature	[°C]		-25...70
Max. relative air humidity	[%]		50; (Ambient temperature 70 °C)
Protection			IP 67
Tests / approvals			
MTTF	[years]		556
UL approval		Ta	-25...70 °C
		Enclosure type	Type 4X (indoor use only) / 12 and 13
		power supply	Class 2
		File number UL	E174191
Mechanical data			
Weight	[g]		52.7
Housing			circular
Dimensions	[mm]		60 x 35 x 20
Inside diameter	[mm]		25.1
Materials			housing: PA; ring: POM
Displays / operating elements			
Display		switching status	1 x LED, yellow
Remarks			
Pack quantity			1 pcs.

Electrical connection - plug

Connector: 1 x M12; coding: A



chanhvinh.com

I7R215

Inductive ring sensor

I7R3025-FPKG/DY/US-100-IPF

Connection

