
chanhvinh.com

IIT206

Inductive sensor

IIB3014BBPKG/M/V4A/10M/WH

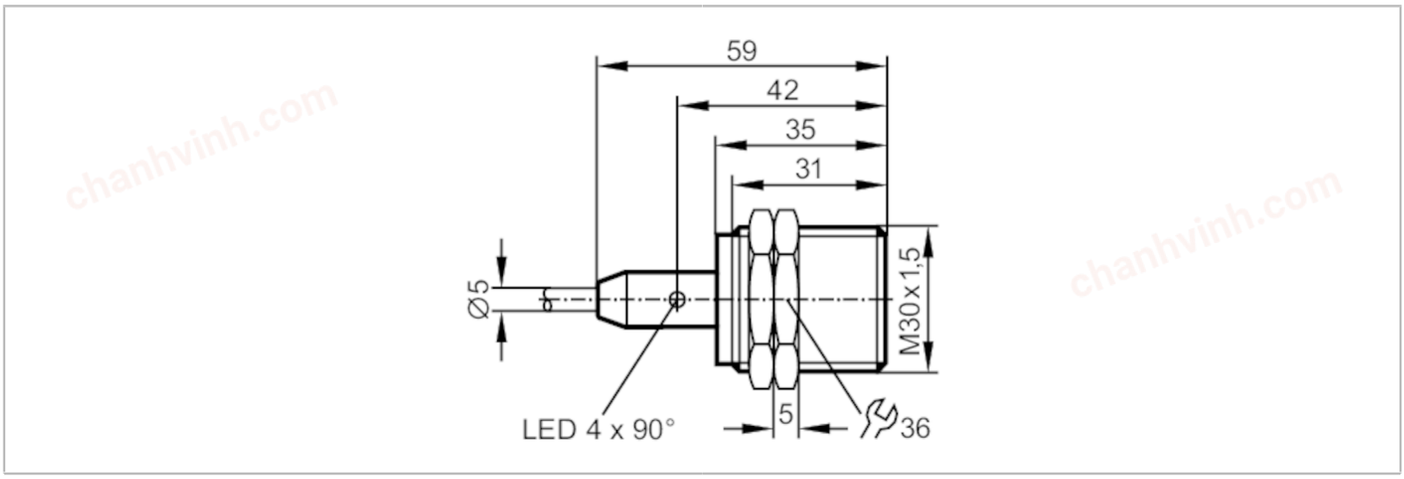

EC 1935/2004

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	14
Housing		threaded type
Dimensions	[mm]	M30 x 1.5 / L = 59
Application		
Special feature		Increased sensing range
Application		regular cleaning processes
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	10; (24 V)
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	100
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	14
Real sensing range Sr	[mm]	14 ± 10 %
Operating distance	[mm]	0...11.34

chanhvinh.com

IIT206

Inductive sensor

IIB3014BBPKG/M/V4A/10M/WH

Increased sensing range			yes
Accuracy / deviations			
Correction factor			steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]		3...15
Switch point drift	[% of Sr]		-10...10
Operating conditions			
Ambient temperature	[°C]		0...100
Protection			IP 68; IP 69K
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-6 HF conducted	10 V
		EN 55011	class B
MTTF	[years]		1590
UL approval		Ta	0...40 °C
		Enclosure type	Type 1
		power supply	Limited Voltage/Current
		File number UL	E174191
Mechanical data			
Weight	[g]		432
Housing			threaded type
Mounting			flush mountable
Dimensions	[mm]		M30 x 1.5 / L = 59
Thread designation			M30 x 1.5
Materials			stainless steel (1.4404 / 316L); sensing face: PEEK
Displays / operating elements			
Display		switching status	4 x 90° LED, yellow
Accessories			
Items supplied			lock nuts: 2
Remarks			
Pack quantity			1 pcs.

chanhvinh.com

IIT206


Inductive sensor

IIB3014BBPKG/M/V4A/10M/WH

Electrical connection

Cable: 10 m, PVC; 3 x 0.34 mm²

Connection

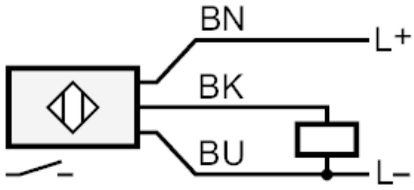

	Core colours :
BK =	black
BN =	brown
BU =	blue