
chanhvinh.com

IM508A

Inductive sensor

IME2020BFRKG/3D

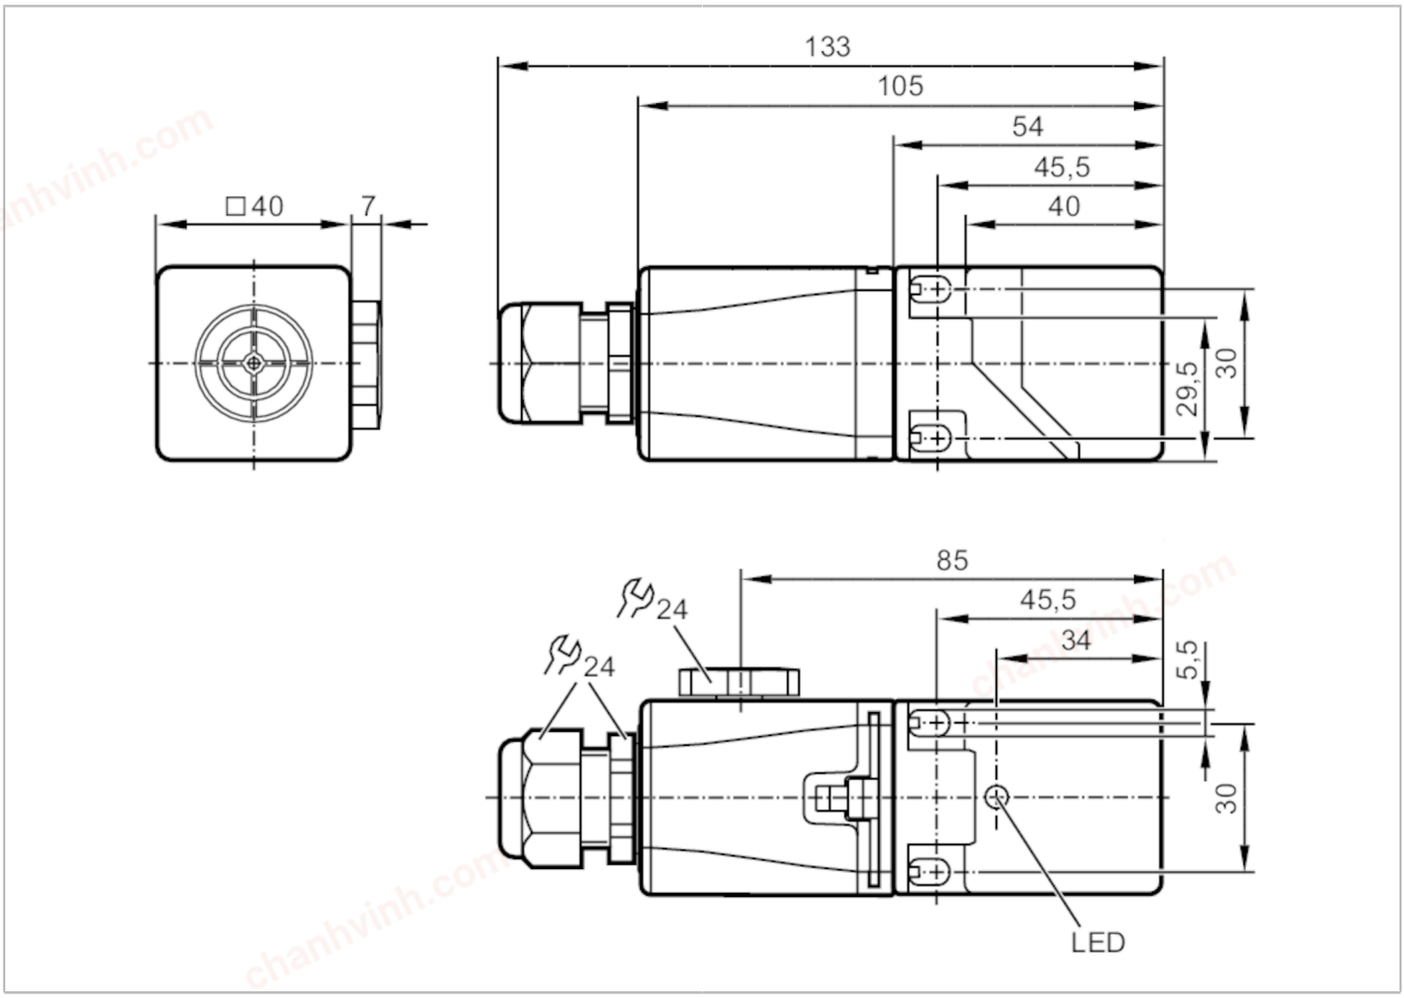

Product characteristics		
Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	20
Housing		rectangular
Dimensions	[mm]	40 x 40 x 105
Electrical data		
Operating voltage	[V]	10...55 DC
Protection class		III
Reverse polarity protection		yes
Outputs		
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	4.6
Minimum load current	[mA]	5
Max. leakage current	[mA]	1
Permanent current rating of switching output DC	[mA]	150
Switching frequency DC	[Hz]	100

chanhvinh.com

IM508A

Inductive sensor

IME2020BFRKG/3D

Short-circuit proof			yes
Overload protection			yes
Detection zone			
Sensing range	[mm]		20
Real sensing range Sr	[mm]		20 ± 10 %
Operating distance	[mm]		0...16.2
Accuracy / deviations			
Correction factor			steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of Sr]		1...20
Switch point drift	[% of Sr]		-10...10
Operating conditions			
Ambient temperature	[°C]		-20...60
Protection			IP 65; IP 67
Tests / approvals			
ATEX marking			II 3D Ex tc IIIC T95°C Dc X
EMC		EN 60947-5-2	
MTTF	[years]		1608
Mechanical data			
Weight	[g]		244
Housing			rectangular
Mounting			flush mountable
Dimensions	[mm]		40 x 40 x 105
Materials			PC; PA; stainless steel
Displays / operating elements			
Display		switching status	1 x LED, yellow
Remarks			
Remarks			Recommendation: Check the safe functioning of the unit after a short circuit.
			5 positions of the active zone possible
Pack quantity			1 pcs.

chanhvinh.com

IM508A

Inductive sensor

IME2020BFRKG/3D

Electrical connection

terminals: 0.34...1.5 mm²; Cable sheath: Ø 5...9 mm

Connection

