
chanhvinh.com

IM5127

Inductive sensor

IMC2015-ARKG/UP/US-100-DRS

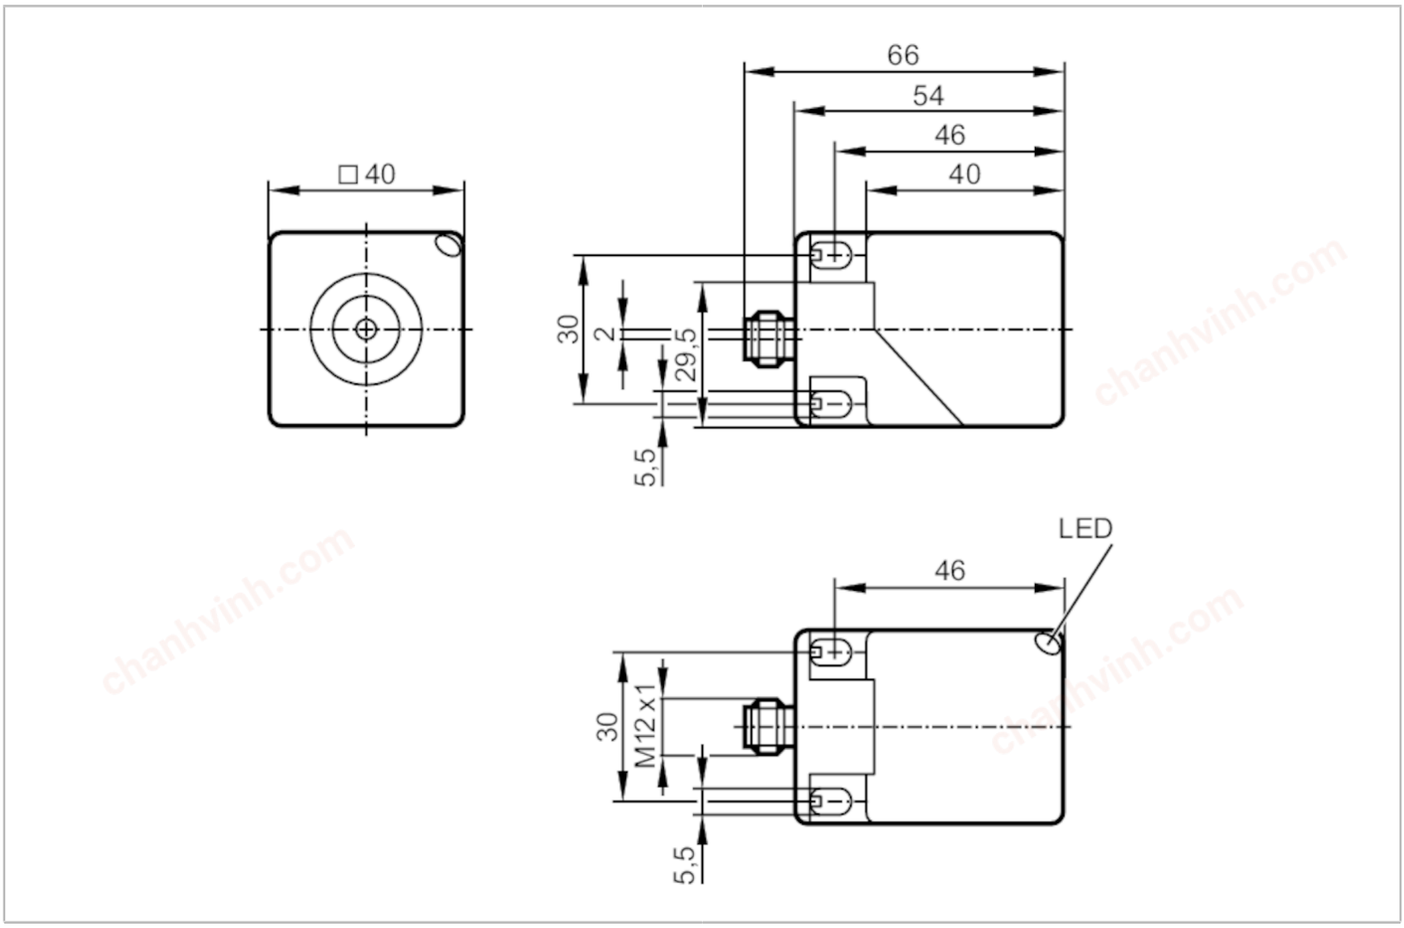

Product characteristics		
Electrical design		PNP/NPN
Output function		normally open
Sensing range	[mm]	15
Housing		rectangular
Dimensions	[mm]	40 x 40 x 54
Electrical data		
Operating voltage	[V]	10...36 DC
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP/NPN
Output function		normally open
Max. voltage drop switching output DC	[V]	4.6
Minimum load current	[mA]	2
Max. leakage current	[mA]	0.8
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	200

chanhvinh.com

IM5127

Inductive sensor

IMC2015-ARKG/UP/US-100-DRS

Short-circuit protection			yes
Type of short-circuit protection			pulsed
Overload protection			yes
Detection zone			
Sensing range	[mm]		15
Real sensing range Sr	[mm]		15 ± 10 %
Operating distance	[mm]		0...12.1
Accuracy / deviations			
Correction factor			steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]		1...15
Switch point drift	[% of Sr]		-10...10
Operating conditions			
Ambient temperature	[°C]		-25...70
Protection			IP 67
Tests / approvals			
EMC		EN 61000-4-2 ESD	8 kV CD / 6 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5 kV line to line, Ri: 2 Ohm
		EN 61000-4-6 HF conducted	10 V
		EN 55011	class B
MTTF	[years]		1740
Mechanical data			
Weight	[g]		143.5
Housing			rectangular
Sensing face			5 positions selectable
Mounting			flush mountable
Dimensions	[mm]		40 x 40 x 54
Materials			PA
Displays / operating elements			
Display		switching status	1 x LED, yellow
Remarks			
Pack quantity			1 pcs.

chanhvinh.com

IM5127

Inductive sensor

IMC2015-ARKG/UP/US-100-DRS

Electrical connection - plug

Connector: 1 x M12; coding: A; Locking: locking, rotatable



